



- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED Tape.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of luminaire is made from curved aluminum profile.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Remote driver enclosure can be surface mounted or installed in a ceiling cavity. Standard enclosure size: 1.60"H x 3.75"W x 18.5"L.
- ✓ LED tape is rated for 60,000 hrs. L80 with 90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

Specifications are subject to change without notice. Every effort has been made for accuracy and errors are unintentional.

PROFILE:

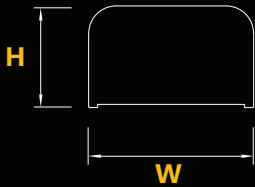


3 Ft and 4 Ft

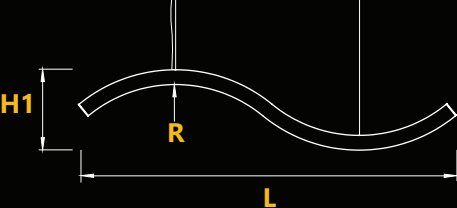


DIMENSIONS:

Profile	Size	Length	Height - H1	Radius - R
Width - W	3 Ft	37.03 In	7.87 In	15 In
2.36 In	4 Ft	46.75 In	6.00 In	30 In
Height - H	6 Ft	73.00 In	7.87 In	15 In
1.45 In	8 Ft	92.75 In	6.00 In	30 In


6 Ft and 8 Ft

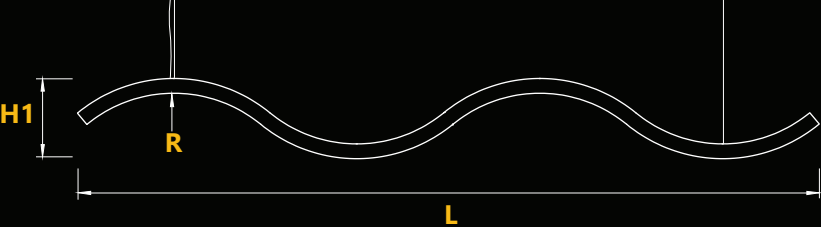


SIZES AND CONFIGURATIONS:

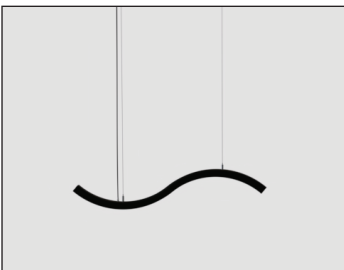


3 Ft

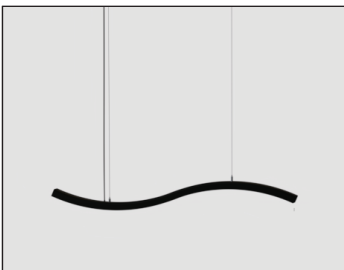


4 Ft

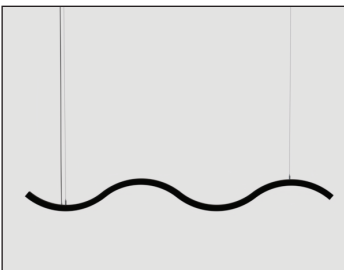


6 Ft




8 Ft

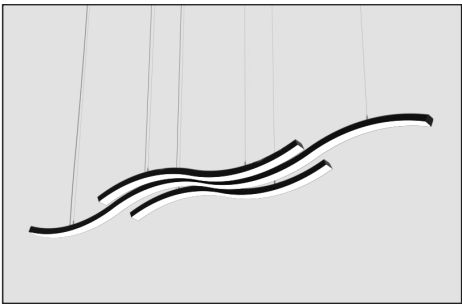

4 Ft and 8 Ft - Combination

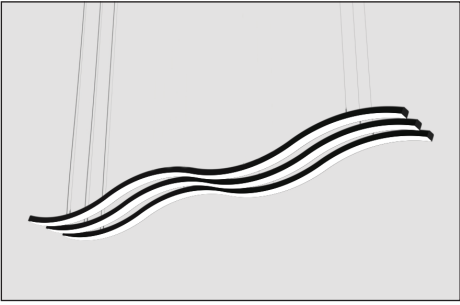

8 Ft - Combination

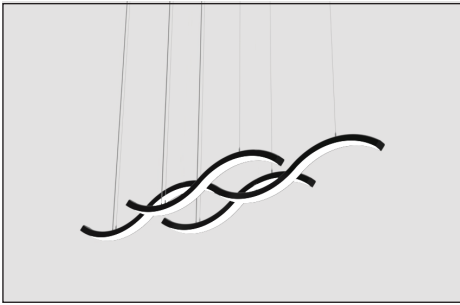

3 Ft and 6 Ft - Combination