


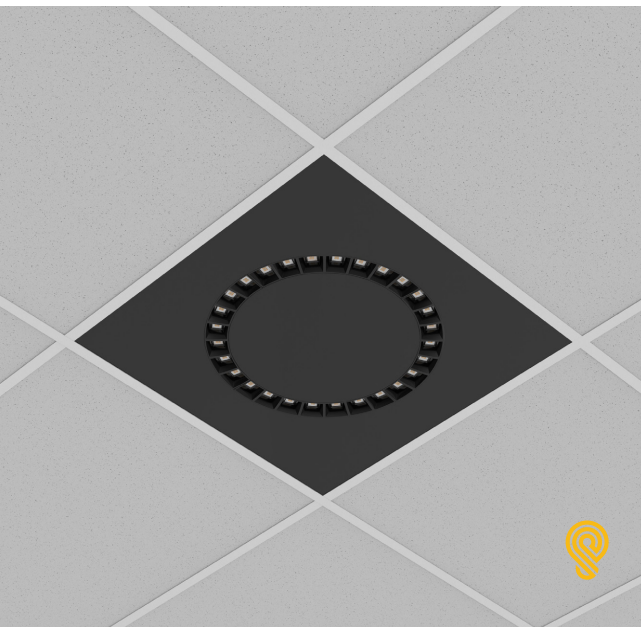

FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: 11" LED or LED board.
- ✓ Dark Optic provides superior lighting distribution with precise low-glare illumination.
- ✓ 7 cell LEDIL reflector is available in several standard finishes.
- ✓ Offered with Flood 50°/16UGR and Wide 80°/19UGR internal optics.
- ✓ Low profile steel body housing contains a built-in driver.
- ✓ Suitable for non-insulated recessed installations into T-Bar or drywall.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ LED's are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED LINE 0+

SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	BEAM	REFLECTOR	FINISH	CCT	OPTIONS

Enter the Product Code into the boxes above.

SOURCE

- ☐ 20 W
- ☐ 30 W

RADIANCE

- ☐ DD - Direct

VOLTAGE

- ☐ UNV - 120/277V
 - ☐ 347V¹
1. Verify availability.

DRIVER

- ☐ ST - On/Off
 - ☐ DL - 0-10V Dim (1%)
 - ☐ DLO - 0-10V Dim (to Off)
 - ☐ DLA - 0-10V Dim (Aux)
 - ☐ DA4 - DALI D4i
 - ☐
- Specify dimming protocol.

MOUNTING

- ☐ RS - Recessed
- ☐ DW - Drywall

BEAM

- ☐ BF - Flood 50°
- ☐ BW - Wide 80°

REFLECTOR

- ☐ SB - Black
- ☐ SW - White

FINISH

- ☐ BK - Black¹
 - ☐ WH - White²
1. RAL 9005
2. RAL 9016

CCT

- ☐ 30K - 3000 Kelvin/90CRI
 - ☐ 35K - 3500 Kelvin/90CRI
 - ☐ 40K - 4000 Kelvin/90CRI
 - ☐
- Specify required CCT.

OPTIONS


- ☐ No - Options¹
 - ☐ EM - Emergency Battery²
 - ☐ JD - JDRF Autonomy Sensor (DA4)
 - ☐ DOS - Daylight & Occupancy Sensor (DLA)
 - ☐ AWN - Athena Wireless Node (DLA)
 - ☐
1. Leave empty.
2. Emergency battery pack.
Specify required option.

DIMENSIONS:

Length	Width	Height	Radius
23.75"	23.75"	1.50"	7.00"

LUMEN OUTPUT lm/W

Watts	30K	35K	40K
20 W	2450 lm	2500 lm	2550 lm
30 W	3675 lm	3750 lm	3825 lm

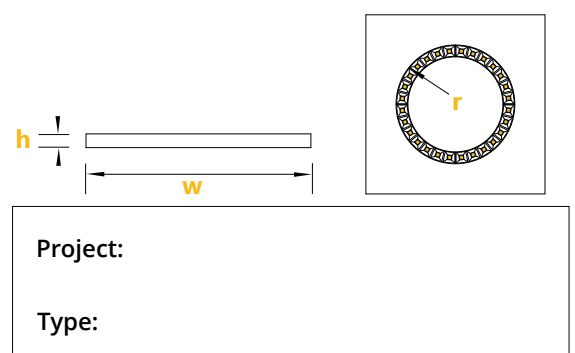
Declare.

Project:
Type: