

ED VECTOR+, V1+, V2+ (RT)


Recessed Trimless

Safety & Warnings:

Risk of fire and electrical shock. Fixture must be installed by a qualified electrician only in accordance with national local building and electrical codes. Disconnect power at electrical panel before servicing. 

General contractor is responsible for the installation of appropriate anchors to support the load of the fixture at positions detailed in the installation manual. Installation of such anchors or other support systems must be completed in accordance with applicable building/installation code.


Mounting Locations

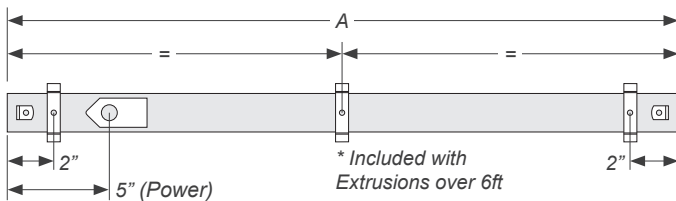

	1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft
Extrusion Length (A)	11.50"	24.25"	35.25"	48.00"	59.00"	71.75"	82.75"	95.50"

Fixture Sizes


	Cutout Width (W1)	Bracket Width (W2)	Fixture Height (H1)	Bracket Height (H2)
Vector+	2.00"	4.50"	2.75"	2.5"-4.5"
Vector 1+	2.60"	3.00"	3.25"	3.0"-4.5"
Vector 2+	3.60"	4.00"	4.00"	3.75"-4.5"




* For continuous runs refer to shop drawing

Steps:

1. Turn off power.
2. Remove lens with a flat-head screw driver (Fig. A1). Careful not to scratch extrusion. Do not remove Endcaps.
3. Unscrew LED plate, remove using flathead screwdriver, and disconnect power from driver (Fig. A2).

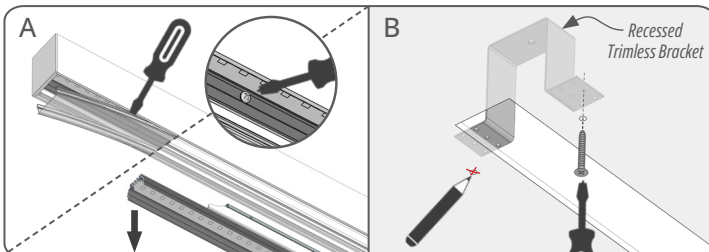

Installation Instructions

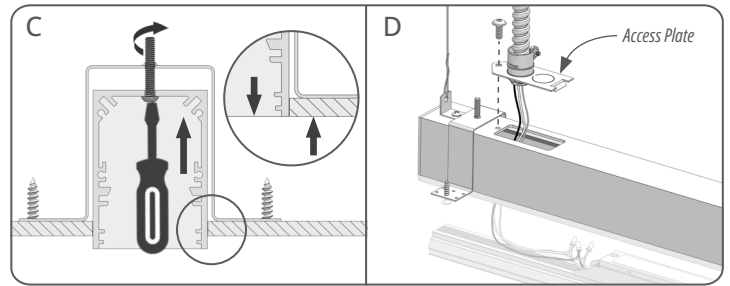


4. Cut opening in drywall. Use dimensions on shop drawing.
5. Mark RT bracket holes, using bracket as template. Fasten brackets to ceiling (Hardware excluded) (Fig. B).
6. Open access plate and remove knockout for 1/2" conduit.
7. Connect power from junction box to access plate (Fig. C) make Electrical connection according to national code.
8. Reattach access plate and fasten closed.
9. Raise fixture through the opening in the ceiling.
10. Adjust height by turning the screw from underneath fixture (Fig. C), until it is flush with ceiling.
11. Re-install LED plate (reverse step 2&3). Re-install lens by snapping into extrusion.

12. Turn on power and test.

For Continuous Runs:

* All continuous run sections come with pre-installed connector bracket.

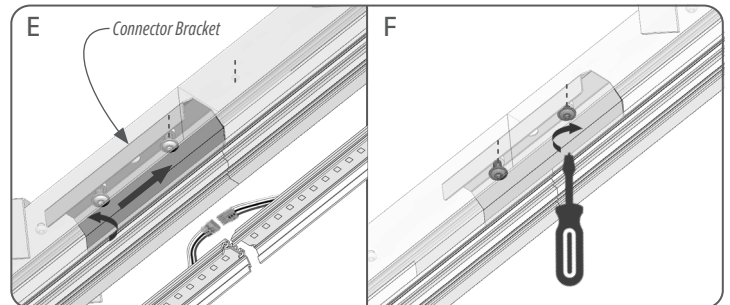

13. Arrange extrusion sections according to labels on fixture.
14. Install extrusions by repeating steps 2 - 7.
15. Loosen screws and slide connector bracket in between sections (Fig. E).
16. Tighten against pre-located blind holes (Fig. F).
17. Connect power and dimming connectors (Fig. E).
18. Repeat step 9 for multiple sections. If you have multiple power feeds, repeat steps 4 - 8.
19. Turn on power and test.