

## FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low-glare illumination.
- ✓ Offered with Flood 50°/10UGR, Wide 80°/15UGR or Asymmetric beam angle.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for recessed installation into drywall or T-Bar.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards. **reinventlight**

## SPECIFICATION:

**ED VECTOR+**  -  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

### TYPE

- ☐ DO - Dark Optic

### SIZE

\_\_\_\_\_ Feet\*  
 \* 1 Foot increments only.

### SOURCE

- ☐ 3W/FT LED  
☐ 5W/FT LED  
☐ 8W/FT LED

### RADIANCE

- ☐ DD - Direct (100%Down)  
 \*Light distribution.

### VOLTAGE

- ☐ 120V  
☐ 277V  
☐ 347V\*  
 \*Not available for all configurations.

### DRIVER

- ☐ ST - On/Off  
☐ DL - 0-10V Dim (1%)  
☐ DLO - 0-10V Dim (to Off)  
☐ DA4 - DALI D4i  
☐ EM - Emergency Driver\*  
☐  \*\*

\*Battery Pack min. 4Feet section.  
 \*\*Specify dimming protocol.

### MOUNTING

- ☐ RS - Recessed  
☐ RB - Recessed T-Bar

### BEAM

- ☐ BF - Flood 50°  
☐ BW - Wide 80°  
☐ BA - Asymmetric

### REFLECTOR

- ☐ SB - Black  
☐ SW - White  
☐ SR - Red  
☐ SL - Silver  
☐ SG - Gold  
☐ SM - Gunmetal

### FINISH

- ☐ BK - Black\*  
☐ WH - White\*\*  
☐ CF/RAL  \*\*\*  
 \*RAL 9005  
 \*\*RAL 9016  
 \*\*\*Specify required RAL number.

### CCT

- ☐ 30K - 3000 Kelvin/90CRI  
☐ 35K - 3500 Kelvin/90CRI  
☐ 40K - 4000 Kelvin/90CRI  
☐  \*  
 \*Specify required CCT.

### OPTIONS

- ☐ No Options\*  
☐ CB - Casambi/Bluetooth  
☐  \*\*  
 \*Leave empty.  
 \*\*Specify required option.

## LUMEN OUTPUT W/Ft:


Watts	30K	35K	40K
3W	395 lm	405 lm	415 lm
5W	660 lm	675 lm	690 lm
8W	1050 lm	1080 lm	1130 lm



Project:

Type:

## SIZE:

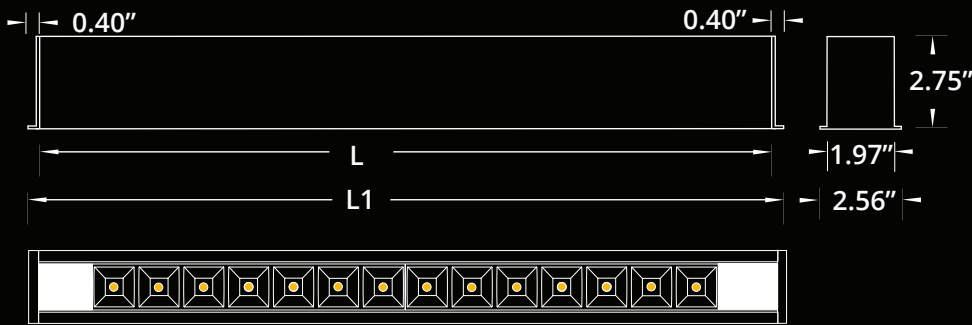

## CONTINUOUS RUN:



Size	L	L1(T-BAR)
1 Feet	11.12 Inch	11.75 Inch
2 Feet	22.12 Inch	23.75 Inch
3 Feet	33.12 Inch	35.75 Inch
4 Feet	48.00 Inch	47.75 Inch
5 Feet	59.00 Inch	59.75 Inch
6 Feet	71.75 Inch	71.75 Inch
7 Feet	82.75 Inch	83.75 Inch
8 Feet	95.50 Inch	95.75 Inch

Total length with endcaps =  $L + 0.22"$

\*Extrusion length included filler plate.

\*\*1-3 Feet, no filler plate requires.

\*\*\*4-8 Feet, filler plates at the end.


\*\*\*\*Continuous Run, filler plates in between & at the end.

\*\*\*\*\*For T-Bar installation with filler plates, L1 is the entire length with trim.

## RADIANCE:



## MOUNTING:

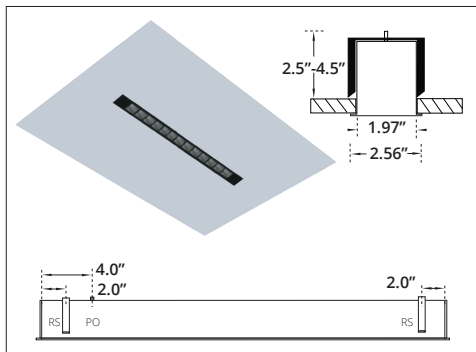


### RECESSED

RS - Recessed Bracket

PO - Power Opening

\*Cutout Dimensions = Total Length x Width of Extrusion.

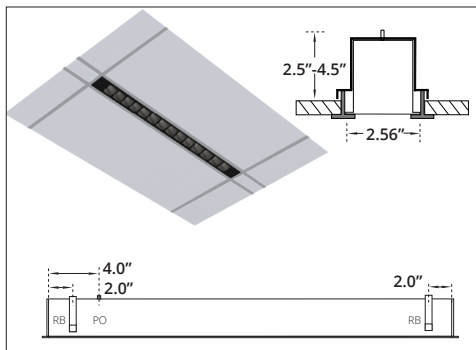


### RECESSED T-BAR


RB - Recessed T-BAR Bracket

PO - Power Opening


## BEAM:



### FLOOD BEAM



### WIDE BEAM



### ASYMMETRIC BEAM

## REFLECTORS:

### SQUARE



### WHITE



### SILVER



### BLACK



### GOLD



### RED



### GUNMETAL

