



## FEATURES:

- ✓ Architectural luminaire with direct/indirect light distribution.
- ✓ Light source: LED boards (5.5"/11"/22").
- ✓ Luminaire shade combines polyester fabric fused to an acrylic sheet, creating a soft and diffused illumination with a built-in-driver.
- ✓ Double laminated finish includes a 2nd outer layer of clear acrylic for improved wipe-down and reduced dirt accumulation.
- ✓ Suitable for surface-mounted or suspended installations.
- ✓ Proven record in hospitality, long-term facilities, and healthcare projects.
- ✓ LED boards are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:



Enter the Product Code into the boxes above.

### SIZE

2 ft

### SOURCE

- 25 W
- 50 W

### RADIANCE

- DI - Direct/Indirect<sup>1</sup>
- 1. 85% Down/15% Side

### VOLTAGE

- UNV - 120/277V
- 347V<sup>1</sup>

1. Verify availability.  
2. Functionality and controls may be limited.

### DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- DLA - 0-10V Dim (Aux)
- DA4 - DALI D4i
- CV - Constant Voltage (RGBW)
- 

Specify dimming protocol.

### MOUNTING

- C4B - 4 ft Canopy BK<sup>1</sup>
- C4W - 4 ft Canopy WH<sup>1</sup>
- C  ft<sup>2</sup>
- S4B - 4 ft Cord BK<sup>1</sup>
- S4W - 4 ft Cord WH<sup>1</sup>
- S  ft<sup>2</sup>
- R4B - Stem 4 ft BK<sup>1</sup>
- R4W - Stem 4 ft WH<sup>1</sup>
- R  ft<sup>2</sup>
- SF - Surface Mount

1. Canopy match the Cord color.  
2. Specify Suspension length and color.

### LENS

OP - Opal

### FINISH

- WH - White Linen<sup>1</sup>
- BK - Black Linen<sup>2</sup>
- GR - Grey Linen<sup>1</sup>
- CL - Chocolate Linen<sup>2</sup>
- JT - Jute<sup>1</sup>

1. White Top Plate & Power Cord  
2. Black Top Plate & Power Cord

### CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW<sup>1</sup>
- TW - Tunable White (27K-65K)<sup>2</sup>
- 

1. Available with DMX or CB.  
2. Available with DL2, DA4 or CB.  
Specify required CCT.

### OPTIONS

- No Options<sup>1</sup>
- 2L - Double Lamination<sup>2</sup>
- CB - Casambi Bluetooth(DL)
- DMX - DMX (RGBW)
- AWN - Athena Wireless Node (DLA)

1. Leave empty.  
2. Anti-Microbial Finish


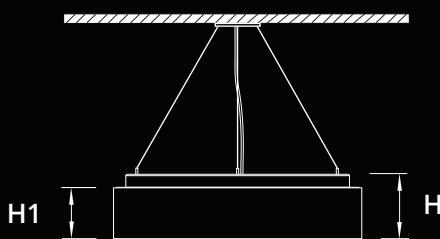
## LUMEN OUTPUT:

Watts	30K	35K	40K
25 W	2610 lm	2650 lm	2690 lm
50 W	5150 lm	5250 lm	5380 lm

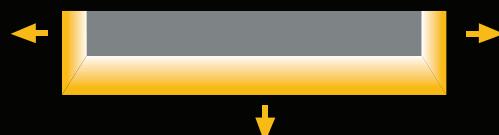


Project:

Type:

**SIZE:**


Size	2 ft
D - Diameter	24.00 in
H - Height	6.25 in
H1 - Height	5.00 in

**RADIANCE:**
**DIRECT/INDIRECT DISTRIBUTION**

**MOUNTING:**


SUSPENDED - (C) CANOPY




SUSPENDED - (S) STRAIGHT




SUSPENDED - (R) STEM




SURFACE MOUNT - (SF)

**SHADE FINISHES:**



WHITE LINEN



BLACK LINEN



GREY LINEN



CHOCOLATE LINEN



JUTE