

ED VECTOR+, V1+, V2+ (WF)


Wall Flush - Direct Distribution

Safety & Warnings:

Risk of fire and electrical shock. Fixture must be installed by a qualified electrician only in accordance with national local building and electrical codes. Disconnect power at electrical panel before servicing. ⚡

General contractor is responsible for the installation of appropriate anchors to support the load of the fixture at positions detailed in the installation manual. Installation of such anchors or other support systems must be completed in accordance with applicable building/installation code.

Mounting Locations

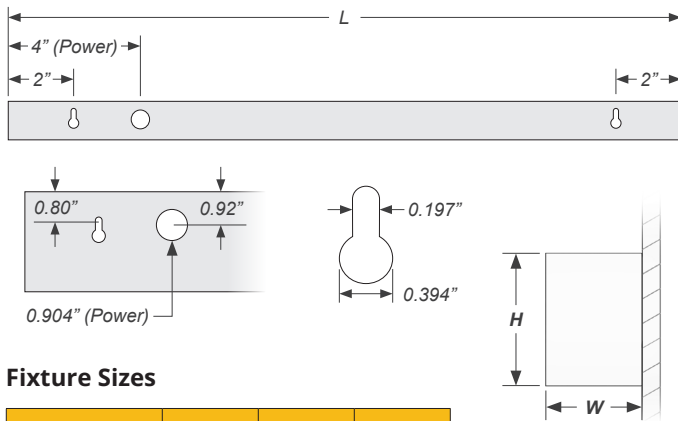

Fixture Sizes


	Vector+	Vector 1+	Vector 2+
Fixture Width (W)	1.97"	2.50"	3.50"
Fixture Height (H)	2.75"	3.25"	4.00"

	1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft
Fixture Length (L)	11.72"	24.45"	35.45"	48.22"	59.22"	71.97"	82.97"	95.72"


* For continuous runs refer to shop drawing

Steps:

1. Turn off power.
2. Measure & mark holes based on mounting location chart, install hardware for mounting (hardware not included).

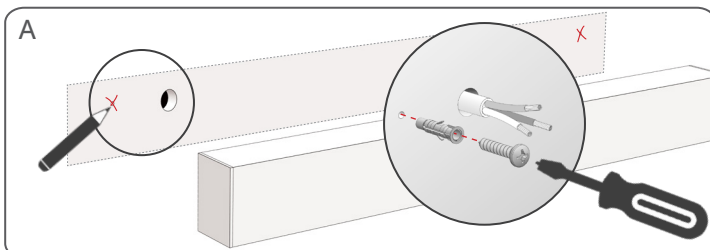


Installation Instructions

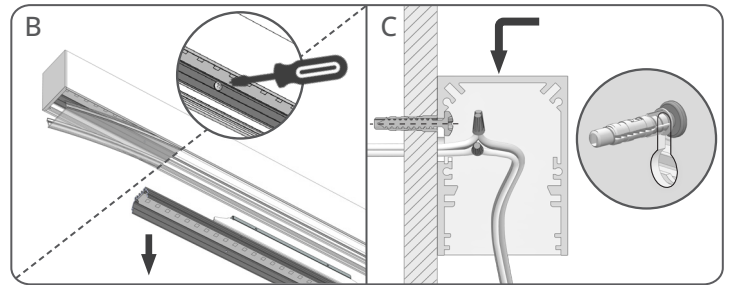

3. Unscrew LED plate and remove from extrusion with flat-head screwdriver (Fig. B). Disconnect power from driver.
4. Mount fixture on keyhole screws (Fig. C).
5. Connect power from wall to fixture, according to Electrical national code.
6. Re-install LED plate (reverse step 3). Re-install lens by pressing back into extrusion.
7. If installing standalone fixture, turn power on and test.

For Continuous Runs:

* All continuous run sections come with pre-installed connector bracket.

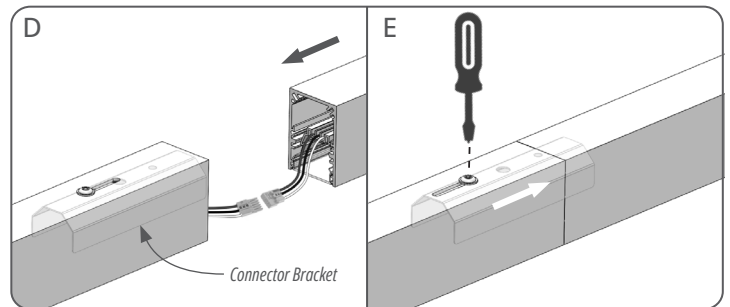

8. Arrange sections in order, according to label on fixtures.
9. Repeat steps 2-3 for all additional sections.
10. Careful to not pinch wires, mount fixture on keyhole screws (Fig. C).
11. Make power and dimming connections between sections (Fig. D).
12. Align extrusions, then slide screw on top towards second extrusion and tighten, locking extrusions together (Fig. F).
13. Repeat steps 10-12 for multiple sections. If fixture has multiple power feeds, repeat step 5.
14. Turn on power and test fixture.