

ED VECTOR+, V1+, V2+


Suspended - Direct Distribution

Safety & Warnings:

Risk of fire and electrical shock. Fixture must be installed by a qualified electrician only in accordance with national local building and electrical codes. Disconnect power at electrical panel before servicing. ⚡

General contractor is responsible for the installation of appropriate anchors to support the load of the fixture at positions detailed in the installation manual. Installation of such anchors or other support systems must be completed in accordance with applicable building/installation code.


Mounting Locations

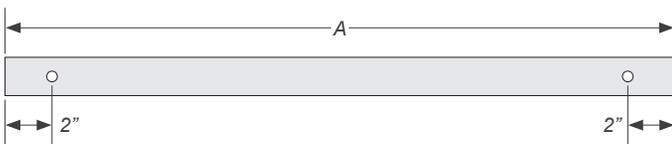

	1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft
Extrusion Length (A)	11.50"	24.25"	35.25"	48.00"	59.00"	71.75"	82.75"	95.50"


Fixture Sizes

	Fixture Width (W)	Fixture Height (H)
Vector+	1.97"	2.75"
Vector 1+	2.50"	3.25"
Vector 2+	3.50"	4.00"

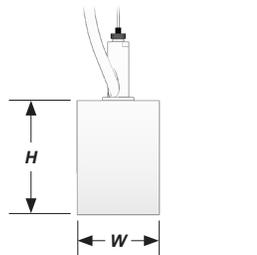


* For continuous runs refer to shop drawing

Power Feed

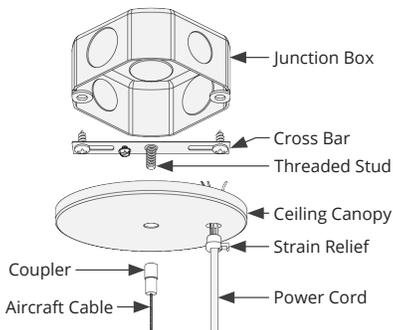


Non-Power Feed

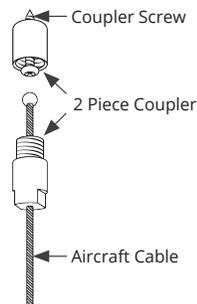

Steps

1. Turn power off.
2. Attach threaded stud to cross-bar and mount to j-box. See Power Feed diagram for exploded view.


Installation Instructions

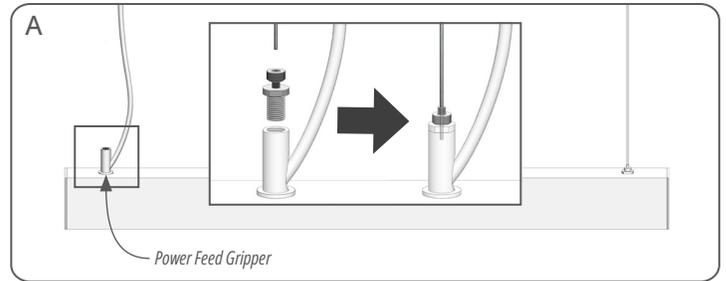

3. Connect the power wires according to Electrical national code, then attach strain relief to ceiling canopy.
4. Raise ceiling canopy into threaded stud, then secure with coupler.
5. For non-power feeds, attach ceiling coupler to the ceiling. Hardware not included.
6. Slide aircraft cables to each end of the cable gripper mounted to the luminaire (Fig. A).
7. Adjust height, level luminaire and cut excess cable.
8. Turn power on and test fixture.

For Continuous Runs:

* All continuous run sections come with pre-installed connector bracket.

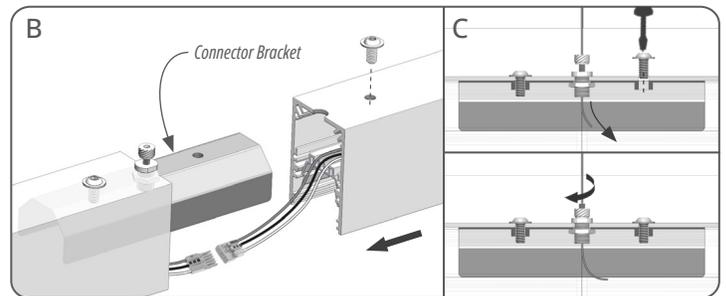

9. Remove lenses and arrange extrusion sections according to labelling on fixture. Keep each lens with its extrusion.
10. For non-power feed sections, repeat steps 5 - 7.
11. Bring sections together and connect power (orange and dimming connectors) (Fig. B).
12. Slide second extrusion into the connector bracket, without pinching wires, and tighten screw. Then slide aircraft cable through gripper. (Fig. C)
13. Level & lock height by tightening top of gripper. (Fig. C)
14. Re-attach lenses according to extrusion sections.
15. Turn power on and test fixture.