


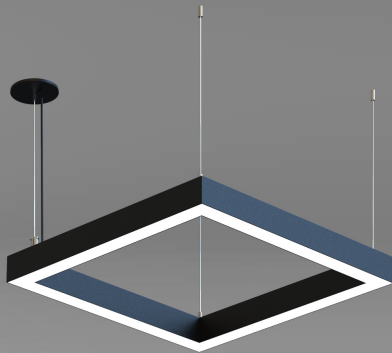

FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED SQUARE+ SIZE — SOURCE — RADIANCE — VOLTAGE — DRIVER — MOUNTING — LENS — FINISH — CCT — OPTIONS

Enter the order code into the boxes above.

SIZE

- ☐ Ft*
- *1-8 Ft Arm length.

SOURCE

- ☐ 5 W/Ft
- ☐ 7 W/Ft
- ☐ 10 W/Ft

RADIANCE

- ☐ DD - Direct (100% Down)
- *Light distribution.

VOLTAGE

- ☐ UNV - 120/277V
- ☐ 347V*
- *Not available for all configurations.

DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dimming (1%)
- ☐ DLO - 0-10V Dimming (to Off)
- ☐ DL2 - 0-10V Dimming (2 Channels)
- ☐ DA4 - DALI D4i
- ☐ DMX - DMX RGBW
- ☐ *
- *Specify dimming protocol.

MOUNTING

- ☐ S6B - 6Ft Cord BK*
- ☐ S6W - 6Ft Cord WH*
- ☐ S Ft**
- ☐ WF - Wall Flush
- ☐ SF - Surface Mount
- ☐ RT - Recessed Trimless
- *Canopy will match the Cord color.
- **Specify Suspension length and color.

LENS

- ☐ OP - Opal
- ☐ PR - Prismatic

FINISH

- ☐ BK - Black*
- ☐ WH - White**
- ☐ CF/RAL ***
- *RAL 9005
- **RAL 9016
- ***Specify required RAL number.

CCT

- ☐ 30K - 3000Kelvin//90CRI
- ☐ 35K - 3500Kelvin/90CRI
- ☐ 40K - 4000Kelvin/90CRI
- ☐ TW - Tunable White* (2700K-6500K)
- ☐ **
- *Available with 0-10V, Dali or Bluetooth controls.
- **Specify required CCT.

OPTIONS

- ☐ No Options*
- ☐ DR - Damp Rated
- ☐ CB - Casambi/Bluetooth
- ☐ **
- *Leave empty.
- **Specify required option.

LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm




Declare.


Project:

Type:


SIZE:

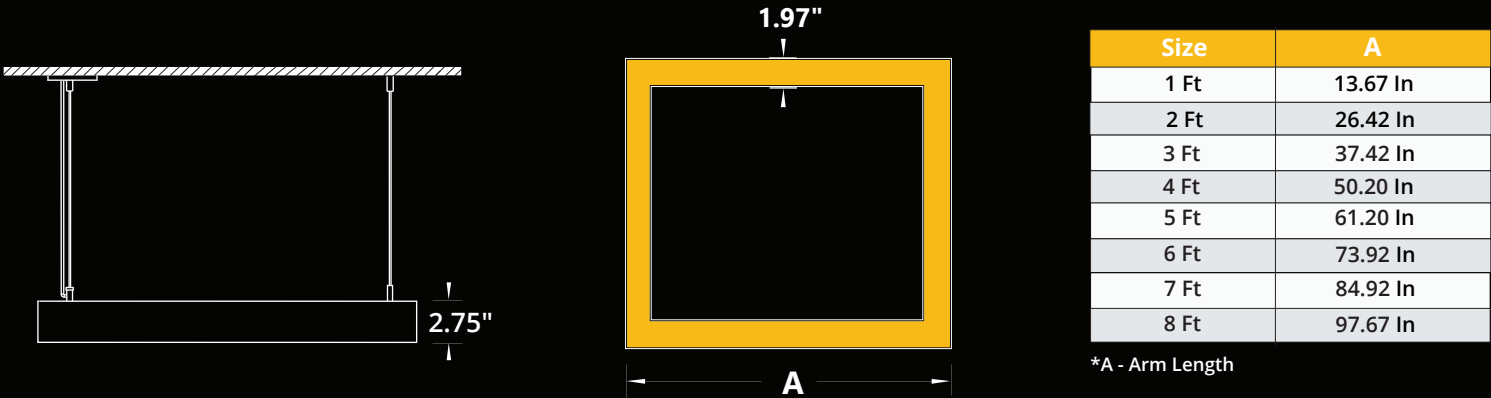

RADIANCE:




MOUNTING:

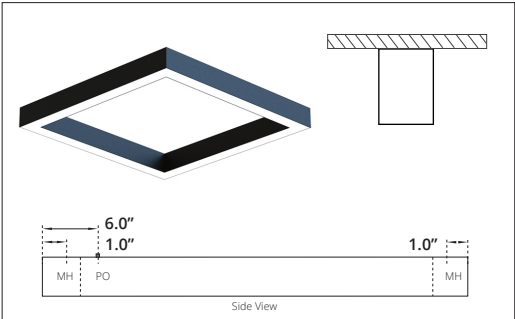

SURFACE MOUNT

MH - Mounting Hole


PO - Power Opening

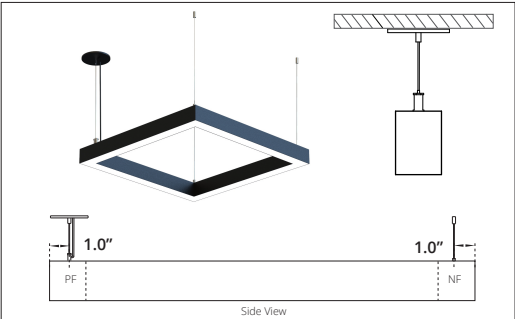

SUSPENDED

PF - Power Feed


NF - Non Power Feed

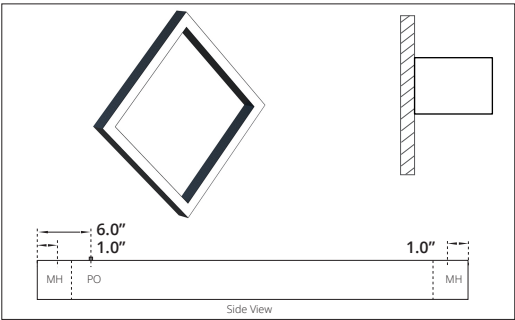

WALL FLUSH

MH - Mounting Hole

PO - Power Opening

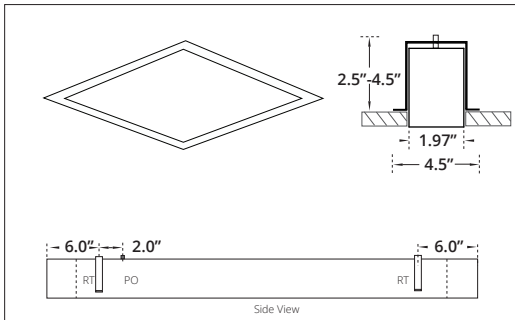

RECESSED TRIMLESS

RT - Recessed Trimless Bracket

PO - Power Opening

*Cutout Dimensions = Total Length x Width of Extrusion.