




FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ Built in frosted lens controls the light and reduce the glare.
- ✓ Available with standard or asymmetric semi specular reflector.
- ✓ Round trim comes in white, black and grey color.
- ✓ Suitable for recessed non insulated ceilings or damp locations.
- ✓ LED Spot is rated for 60,000hrs. L70 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:



Enter the Product Code into the boxes above.

SIZE

- 4 Inch
- 6 Inch

SOURCE

- 10W LED
- 20W LED
- 30W LED*

* Not available for 4 Inch.

RADIANCE

- DD - Direct (100%Down)
*Light Distribution.

VOLTAGE

- 120V
- 277V
- 347V*

* Not available for all configurations.

DRIVER

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- EM - Emergency*
- **

* Emergency Battery Pack.

** Please specify dimming method.

HOUSING

- NC - New Const. Plate
- RT - Retrofit

REFLECTOR

- ST - Standard
- AS - Asymmetric*

* Available for 4 Inch trim only.

TRIM

- WH - White
- BK - Black
- GR - Grey

CCT

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin
- TW - Tunable White** (2700K-6500K)

*Other options are available.


**Available with Dali controls.

DIMENSIONS:

Size	4 Inch	6 Inch
Width	6.250"	7.875"
Height	4.875"	5.875"
Cutout	5.000"	6.500"

LUMEN OUTPUT:

Watts	30K	35K	40K
10W	1050 lm	1100 lm	1125 lm
20W	1915 lm	1950 lm	1985 lm
30W	2950 lm	3010 lm	3070 lm

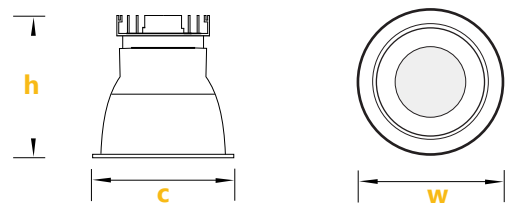

Project:

Type: