

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by high efficiency opal lenses.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for surface, suspended, recessed or wall mounted installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED VECTOR2+ - - - - - - - - - -

Enter the Product Code into the boxes above.

SIZE

ft
1-8 ft
Continuous Run
(0.5 ft Increments)

SOURCE

5 W/ft
 7 W/ft
 10 W/ft

RADIANCE

DD - Direct
 UD - Uneven¹
1. Available in sizes 4 ft and up.

VOLTAGE

UNV - 120/277V
 347V¹
1. Verify availability.

DRIVER

ST - On/Off
 DL - 0-10V Dim (1%)
 DLO - 0-10V Dim (to Off)
 DL2 - 0-10V Dim (TW)
 DLA - 0-10V Dim (Aux)
 DA4 - DALI D4i
 CV - Constant Voltage (RGBW)

Specify dimming protocol.

MOUNTING

S6B - 6 ft Cord BK¹
 S6W - 6 ft Cord WH¹
 S ft²
 WM - Wall Mount
 WF - Wall Flush
 SF - Surface Mount
 RT - Recessed Trimless

LENS

OP - Opal
 OR - Opal Regressed

FINISH

BK - Black¹
 WH - White²
 CF/RAL
1. RAL 9005
2. RAL 9016
Specify required RAL number.

CCT

30K - 3000 Kelvin/90CRI
 35K - 3500 Kelvin/90CRI
 40K - 4000 Kelvin/90CRI
 RGBW¹
 TW - Tunable White (27K-65K)²

1. Available with DMX or CB.
2. Available with DL2, DA4 or CB.
Specify required CCT.

OPTIONS

No Options¹
 EM - Emergency Battery Pack²
 DC - Dual Circuit³
 EC - Emergency Circuit
 DR - Damp Rated
 CB - Casambi Bluetooth(TW, RGBW)⁴
 DMX - DMX (RGBW)
 JD - JDRF Autonomy Sensor (DA4)⁴
 DOS - Daylight & Occupancy Sensor (DLA)⁴
 AWN - Athena Wireless Node (DLA)⁴

1. Leave empty.
2. Battery Pack per 4 ft section.
3. Control Downlight/Uplight separately.
4. Available in sizes 4 ft and up.

LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



Declare.

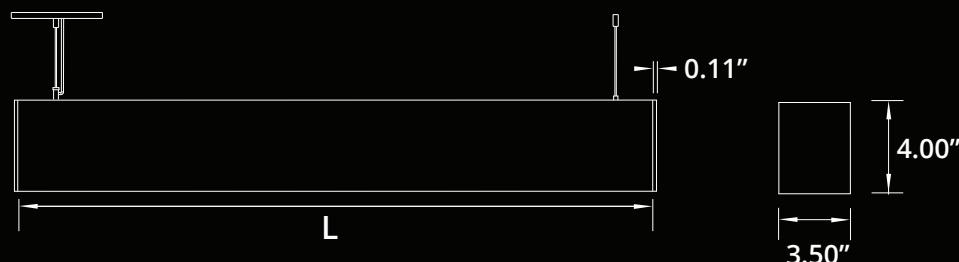
Project:

Type:

905-830-0339 / 1-800-667-9281

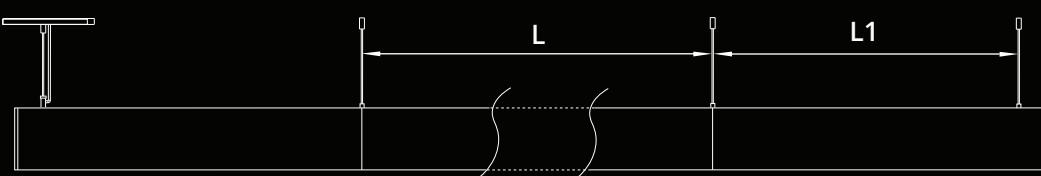
info@edisonlighting.ca

www.edisonlighting.ca



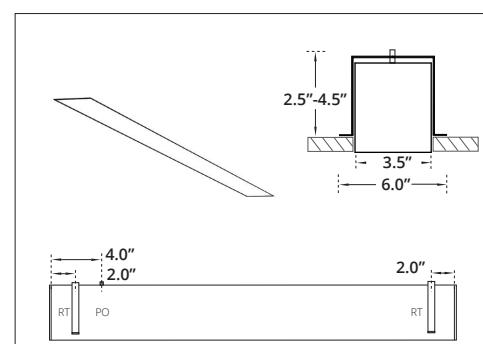
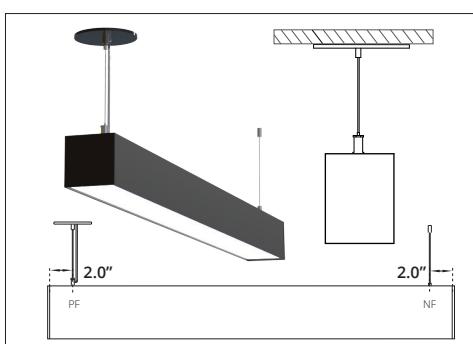
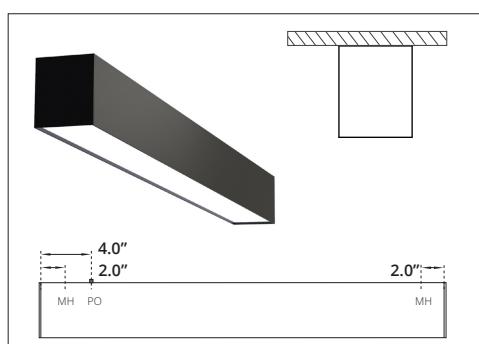
SIZE:


Size	L
1 ft	11.50 in
2 ft	24.25 in
3 ft	35.25 in
4 ft	48.00 in
5 ft	59.00 in
6 ft	71.75 in
7 ft	82.75 in
8 ft	95.50 in

L - Linear extrusion length only.
 Total length with Endcaps = L + (2 x 0.11)

CONTINUOUS RUN:


Continuous Run suspension dimensions
 L1 = L - 2.0 in

RADIANCE:

MOUNTING:

SURFACE MOUNT

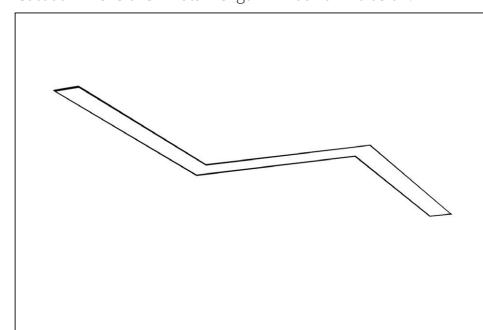
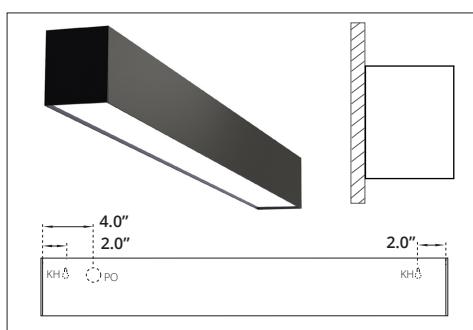
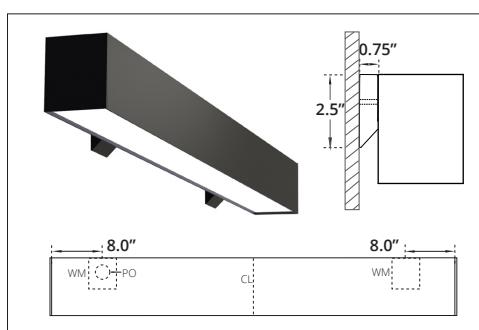
MH - Mounting Hole
 PO - Power Opening

SUSPENDED

PF - Power Feed
 NF - Non Power Feed

RECESSED TRIMLESS

RT - Recessed Trimless Bracket
 PO - Power Opening
 Cutout Dimensions = Total Length x Width of Extrusion.


WALL MOUNT

PO - Power Opening
 WM - Wall Mount Bracket
 1-3 ft, single Wall Mount Bracket with Power Opening in the centre.

WALL FLUSH

KH - Key Hole
 PO - Power Opening

VARIABLE ANGLE

60°, 90°, 120°, 135° or Custom.