

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/Indirect distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low-glare illumination.
- ✓ Offered with a Flood 50°/10UGR, Wide 80°/15UGR or Asymmetric beam angle.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for surface, suspended, recessed and wall mount installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED VECTOR+ - - - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

- ☐ DO - Dark Optic

SIZE

_____ Feet*
 *1-8 Feet Continuous Run.

SOURCE

- ☐ 3W/FT LED
☐ 5W/FT LED
☐ 8W/FT LED

RADIANCE

- ☐ DD - Direct (100%Down)
☐ UD - Uneven (70%Down/30%Up)**
 *Light distribution.
 **Available in 4ft and longer sizes, Surface Mount configuration is not applicable.

VOLTAGE

- ☐ 120V
☐ 277V
☐ 347V*
 *Not available for all configurations.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DA4 - DALI D4i
☐ EM - Emergency Driver*
☐ _____**
 *Battery Pack min. 4Feet section.
 **Specify dimming protocol.

MOUNTING

- ☐ S6W - 6Ft Cord WH*
☐ S6B - 6Ft Cord BK*
☐ S _____ Feet**
☐ WM - Wall Mount
☐ WF - Wall Flush
☐ SF - Surface Mount
☐ RT - Recessed Trimless

*Canopy will match the Cord color.
 **Specify Suspension length and color.

BEAM

- ☐ BF - Flood 50°
☐ BW - Wide 80°
☐ BA - Asymmetric

REFLECTOR

- ☐ SB - Black
☐ SW - White
☐ SR - Red
☐ SL - Silver
☐ SG - Gold
☐ SM - Gunmetal

FINISH

- ☐ BK - Black*
☐ WH - White**
☐ CF/RAL _____***
 *RAL 9005
 **RAL 9016
 ***Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ _____*
 *Specify required CCT.

OPTIONS

- ☐ No Options*
☐ DC - Dual Circuit**
☐ CB - Casambi/Bluetooth
☐ _____***
 *Leave empty.
 **Control Downlight/Uplight separately.
 ***Specify required option.

LUMEN OUTPUT W/Ft:


Watts	30K	35K	40K
3W	395 lm	405 lm	415 lm
5W	660 lm	675 lm	690 lm
8W	1050 lm	1080 lm	1130 lm


Declare.

Project:

Type:

SIZE:

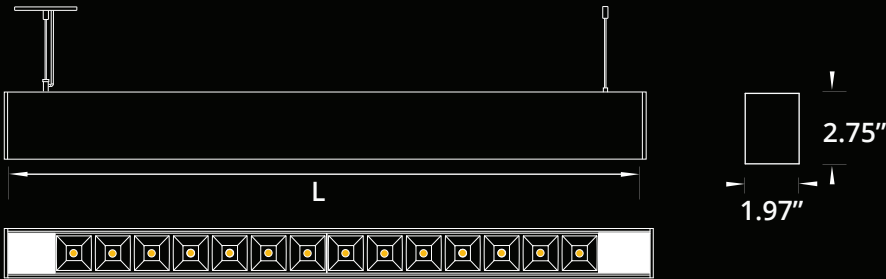

Size	L (Extrusion Length)
1 Feet	11.12 Inch
2 Feet	22.12 Inch
3 Feet	33.12 Inch
4 Feet	48.00 Inch
5 Feet	59.00 Inch
6 Feet	71.75 Inch
7 Feet	82.75 Inch
8 Feet	95.50 Inch

Total length with endcaps = L + 0.22"

*Extrusion length included filler plate.

**1-3 Feet, no filler plate requires.




***4-8 Feet, filler plates at the end.

****Continuous Run, filler plates in between & at the end.

CONTINUOUS RUN:



BEAM/RADIANCE:



REFLECTORS:

SQUARE



WHITE



SILVER



BLACK



GOLD




RED



GUNMETAL


MOUNTING:

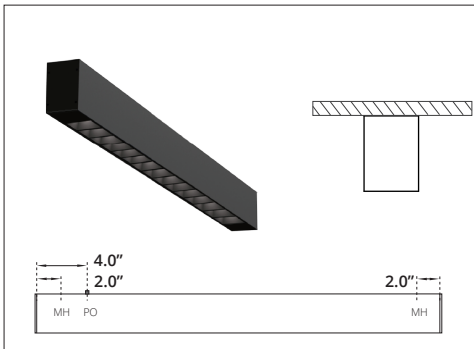

SURFACE MOUNT

MH - Mounting Hole


PO - Power Opening

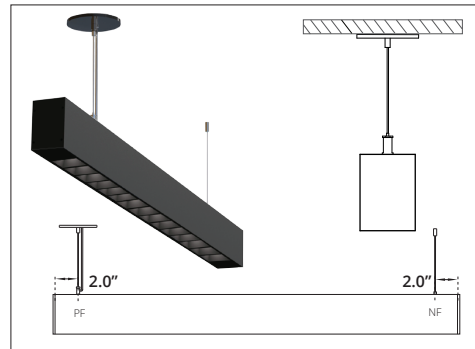

SUSPENDED

PF - Power Feed

NF - Non Power Feed

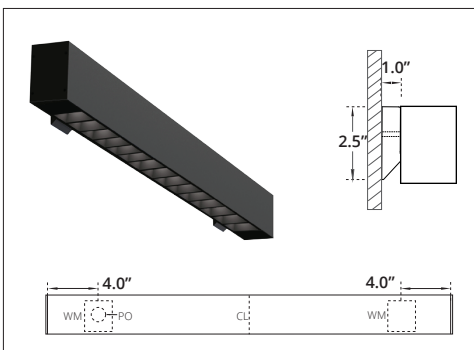


WALL MOUNT

PO - Power Opening

WM - Wall Mount Bracket

*1-3 Feet, single Wall Mount Bracket with Power Opening in the centre.

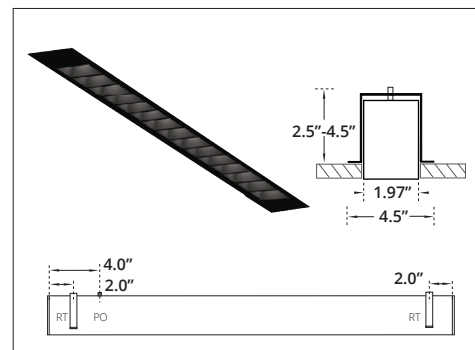

RECESSED TRIMLESS

RT - Recessed Trimless Bracket

PO - Power Opening

*Cutout Dimensions = Total Length x Width of Extrusion.