




**FEATURES:**

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency metalized integral reflector comes in following beam angles: Narrow Spot 10°, Spot 25° and Flood 40°.
- ✓ Adjustable trim assembly can be tilted up to 25° in both directions.
- ✓ Available with optional flat frame plate for NC installations.
- ✓ Suitable for recessed non insulated ceilings and dry locations.
- ✓ LED spot is rated for 60,000hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.


reinventlight

**SPECIFICATION:**



- SIZE**
- 1x-Single
  - 2x-Double
  - 3x-Triple
- SOURCE**
- 10W LED
  - 15W LED
  - 20W LED
- RADIANCE**
- DD - Direct (100%Down)  
\*Light Distribution.
- VOLTAGE**
- 120V
  - 277V
  - 347V\*
- \*Not available for all configurations.
- DRIVER**
- ST - Standard (Non-Dimming)
  - DL - 0-10V Dimming (1%)
  - DA - DALI
  - \*
- \* Please specify dimming method.

- MOUNTING**
- RT -Retrofit
  - NC- New Const. Plate
- REFLECTOR**
- NP - Narrow Spot
  - SP - Spot
  - FL - Flood
- TRIM**
- WH - White
  - BK - Black
  - GR - Grey
- CCT**
- 30K/90CRI - 3000Kelvin
  - 35K/90CRI - 3500Kelvin
  - 40K/90CRI - 4000Kelvin
- \*Other options are available.

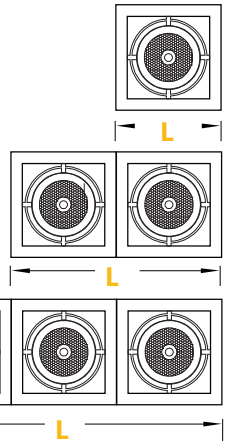

**DIMENSIONS:**

Size	Height	Width	Length	Cut Out
Single	5.938"	7.09"	7.09"	6.25"x6.25"
Double	5.938"	7.09"	14.17"	6.25"x12.25"
Triple	5.938"	7.09"	21.26"	6.25"x20.25"

**LUMEN OUTPUT:**

Watts	30K	35K	40K
10W	1050 lm	1070 lm	1090 lm
15W	1570 lm	1605 lm	1640 lm
20W	2090 lm	2145 lm	2200lm

Project:

Type: