



**FEATURES:**

- ✓ Architectural luminaire with direct or direct-indirect distribution.
- ✓ Light source: LED 5.5" board.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines two aluminum sides with laser-cut metal top enclosure.
- ✓ Suitable for suspended and surface mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LED Strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

**SPECIFICATION:**

**ED RING+**

SIZE —  SOURCE —  RADIANCE —  VOLTAGE —  DRIVER —  MOUNTING —  LENS —  FINISH —  CCT —  OPTIONS

Enter the Product Code into the boxes above.

**SIZE**

- 2 ft
  - 3 ft
  - 4 ft
  -
- Specify custom size.

**SOURCE**

- 25 W
  - 50 W
  - 75 W<sup>1</sup>
1. Available for 4ft & Custom sizes.  
2. Other Wattages are available.

**RADIANCE**

- DD - Direct
- UD - Uneven

**VOLTAGE**

- UNV - 120/277V
  - 347V<sup>1</sup>
1. Verify availability.

**DRIVER**

- ST - On/Off
  - DL - 0-10V Dim (1%)
  - DLO - 0-10V Dim (to Off)
  - DL2 - 0-10V Dim (TW)
  - DLA - 0-10V Dim (Aux)
  - DA4 - DALI D4i
  - CV - Constant Voltage (RGBW)
  -
- Specify dimming protocol.

**MOUNTING**

- S6B - 6 ft Cord BK<sup>1</sup>
  - S6W - 6 ft Cord WH<sup>1</sup>
  - S  ft<sup>2</sup>
  - C6B - 6 ft Canopy BK<sup>1</sup>
  - C6W - 6 ft Canopy WH<sup>1</sup>
  - C  ft<sup>2</sup>
  - SF - Surface Mount
1. Canopy match the Cord color.  
2. Specify Suspension length/color.  
3. C - Ceiling Canopy only available for 2-3-4 ft sizes.

**LENS**

- OP - Opal

**FINISH**

- BK - Black<sup>1</sup>
  - WH - White<sup>2</sup>
  - CF/RAL
1. RAL 9005  
2. RAL 9003  
Specify required RAL number.

**CCT**

- 30K - 3000 Kelvin/90CRI
  - 35K - 3500 Kelvin/90CRI
  - 40K - 4000 Kelvin/90CRI
  - RGBW<sup>1</sup>
  - TW - Tunable White (27K-65K)<sup>2</sup>
  -
1. Available with DMX or CB.  
2. Available with DL2, DA4 or CB.  
Specify required CCT.

**OPTIONS**

- No Options<sup>1</sup>
  - DC - Dual Circuit<sup>2</sup>
  - EC - Emergency Circuit
  - CB - Casambi Bluetooth(TW, RGBW)
  - DMX - DMX (RGBW)
  - AWN - Athena Wireless Node (DLA)
1. Leave empty.  
2. Control Downlight/Uplight separately.

**LUMEN OUTPUT:**

Watts	30K	35K	40K
25 W	2205 lm	2250 lm	2295 lm
50 W	4410 lm	4500 lm	4590 lm
75 W	6610 lm	6750 lm	6890 lm





Declare.



Project:

Type:


**SIZE:**

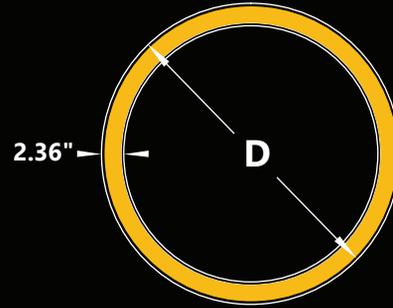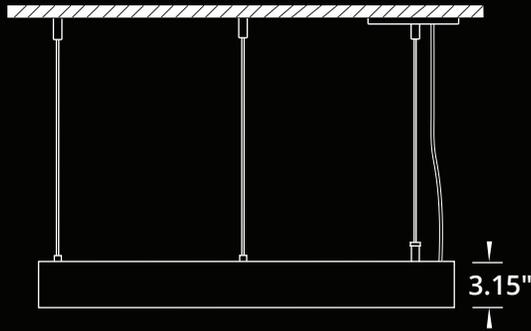

**RADIANCE:**




**MOUNTING:**

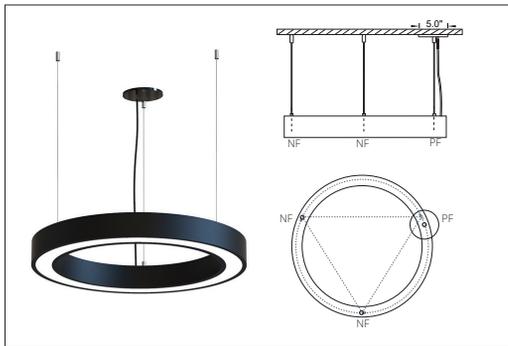

**SUSPENDED - STRAIGHT WIRE**


PF - Power Feed  
NF - Non Power Feed

Size	Diameter
2 ft	26.10 in
3 ft	35.43 in
4 ft	47.24 in

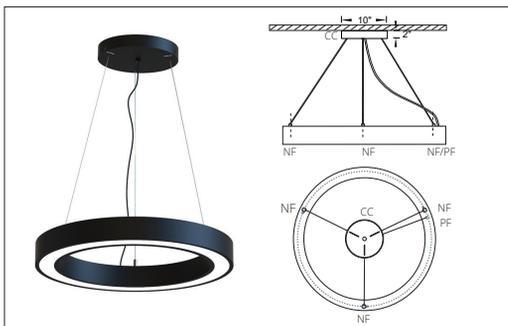

**SUSPENDED - CEILING CANOPY**

CC - Ceiling Canopy - Available for 2-3-4 ft sizes  
PF - Power Feed  
NF - Non Power Feed

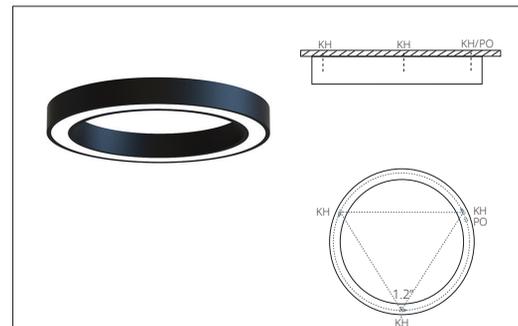

**SURFACE MOUNT**

PO - Power Opening  
KH - Key Hole