


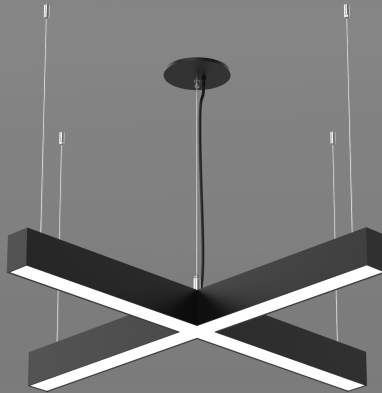

FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED CROSS+ — — — — — — — — — —

Enter the Product Code into the boxes above.

SIZE

☐ Ft*

*1-8 Ft Arm length.

SOURCE

- ☐ 5 W/Ft
☐ 7 W/Ft
☐ 10 W/Ft

RADIANCE

- ☐ DD - Direct (100%Down)
 *Light Distribution.

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V*
 *Not available for all configurations.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ DA4 - DALI D4i
☐ DMX - DMX RGBW
☐ *
 *Specify dimming protocol.

MOUNTING

- ☐ S6B - 6Ft Cord BK*
☐ S6W - 6Ft Cord WH*
☐ S Ft**
☐ WF - Wall Flush
☐ SF - Surface Mount
☐ RT - Recessed Trimless
 *Canopy will match the Cord color.
 **Specify Suspension length and color.

LENS

- ☐ OP - Opal
☐ PR - Prismatic

FINISH

- ☐ BK - Black*
☐ WH - White**
☐ CF/RAL ***
 *RAL 9005
 **RAL 9016
 ***Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW
☐ TW - Tunable White*
 (2700K-6500K)
☐ **
 *Available with 0-10V, Dali or Bluetooth controls.
 **Specify required CCT.

OPTIONS

- ☐ No Options*
☐ DR - Damp Rated
☐ CB - Casambi/Bluetooth
☐ **
 *Leave empty.
 **Specify required option.

LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm




Declare.

Project:

Type:

SIZE:

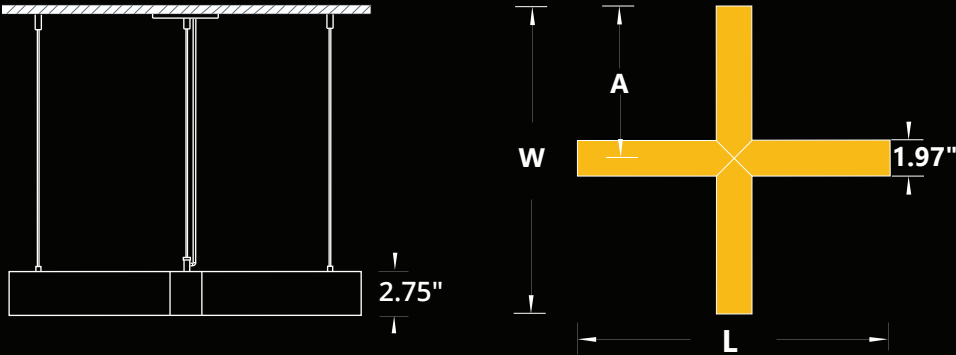

Size	A	L x W
1 Ft	11.70	23.40 x 23.40
2 Ft	24.45	48.90 x 48.90
3 Ft	35.45	70.90 x 70.90
4 Ft	48.20	96.40 x 96.40
5 Ft	59.20	118.40 x 118.40
6 Fe	71.95	143.90 x 143.90
7 Ft	82.95	165.90 x 165.90
8 Ft	95.70	191.40 x 191.40


*A - Arm Length

**L - Total Length


***W - Total Width

****All dimensions are in Inches.

RADIANCE:




MOUNTING:

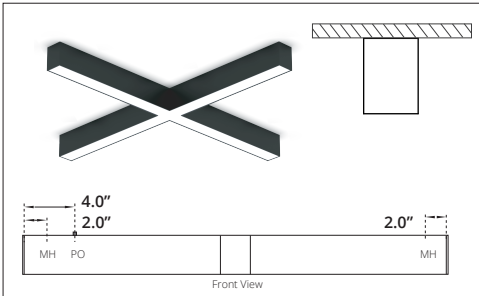

SURFACE MOUNT

MH - Mounting Hole


PO - Power Opening

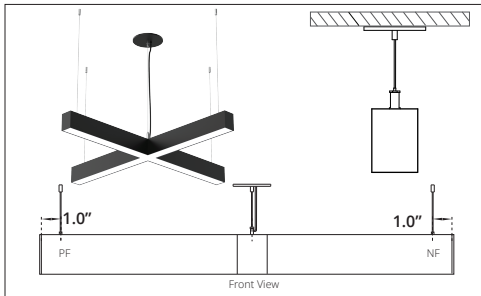

SUSPENDED

PF - Power Feed


NF - Non Power Feed

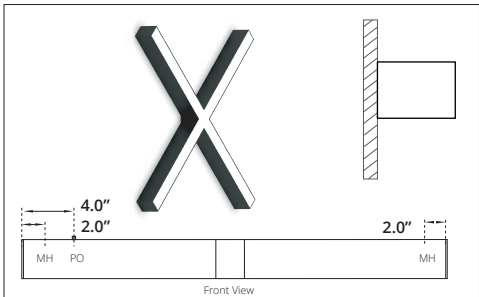

WALL FLUSH

MH - Mounting Hole

PO - Power Opening

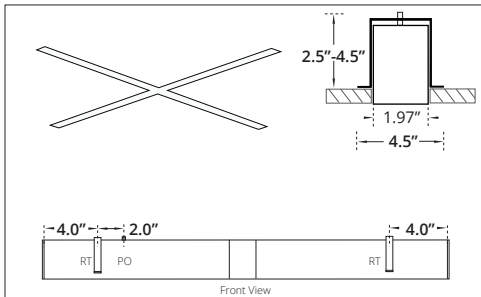

RECESSED TRIMLESS

RT - Recessed Trimless Bracket

PO - Power Opening

*Cutout Dimensions = Total Length x Width of Extrusion.