
**FEATURES:**

- ✓ Architectural linear luminaire with direct or direct/Indirect distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low-glare illumination.
- ✓ Offered with a Flood 50°/10UGR, Wide 80°/15UGR or Asymmetric beam angle.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for surface, suspended, recessed and wall mount installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

**reinventlight**
**SPECIFICATION:**
**ED VECTOR+**  -  -  -  -  -  -  -  -  -  -  - 

Enter the Product Code into the boxes above.

TYPE	SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	BEAM	REFLECTOR	FINISH	CCT	OPTIONS
<input type="checkbox"/> DO Dark Optic	<input type="text"/> ft 1-8 ft Continuous Run (1 ft increments)	<input type="checkbox"/> 3 W/ft <input type="checkbox"/> 5 W/ft <input type="checkbox"/> 8 W/ft	<input type="checkbox"/> DD - Direct <input type="checkbox"/> UD - Uneven <sup>1</sup> <small>1. Available in sizes 4 ft and up.</small>	<input type="checkbox"/> UNV - 120/277V <input type="checkbox"/> 347V <sup>1</sup> <small>1. Verify availability.</small>	<input type="checkbox"/> ST - On/Off <input type="checkbox"/> DL - 0-10V Dim (1%) <input type="checkbox"/> DLO - 0-10V Dim (to Off) <input type="checkbox"/> DLA - 0-10V Dim (Aux) <input type="checkbox"/> DA4 - DALI D4i <input type="checkbox"/> <span style="border: 1px solid black; padding: 2px;"> </span>	<input type="checkbox"/> S6B - 6ft Cord BK <sup>1</sup> <input type="checkbox"/> S6W - 6ft Cord WH <sup>1</sup> <input type="checkbox"/> S <input type="text"/> ft <sup>2</sup> <input type="checkbox"/> WM - Wall Mount <input type="checkbox"/> WF - Wall Flush <input type="checkbox"/> SF - Surface Mount <input type="checkbox"/> RT - Recessed Trimless					

1. Canopy match the Cord color.  
 2. Specify Suspension length/color.

BEAM	REFLECTOR	FINISH	CCT	OPTIONS
<input type="checkbox"/> BF - Flood 50° <input type="checkbox"/> BW - Wide 80° <input type="checkbox"/> BA - Asymmetric	<input type="checkbox"/> SB - Black <input type="checkbox"/> SW - White <input type="checkbox"/> SR - Red <input type="checkbox"/> SL - Silver <input type="checkbox"/> SG - Gold <input type="checkbox"/> SM - Gunmetal	<input type="checkbox"/> BK - Black <sup>1</sup> <input type="checkbox"/> WH - White <sup>2</sup> <input type="checkbox"/> CF/RAL <input type="text"/> <small>1. RAL 9005    2. RAL 9016    Specify required RAL number.</small>	<input type="checkbox"/> 30K - 3000 Kelvin/90CRI <input type="checkbox"/> 35K - 3500 Kelvin/90CRI <input type="checkbox"/> 40K - 4000 Kelvin/90CRI <input type="checkbox"/> <span style="border: 1px solid black; padding: 2px;"> </span> <small>Specify required CCT.</small>	<input type="checkbox"/> No Options <sup>1</sup> <input type="checkbox"/> EM - Emergency Battery Pack <sup>2</sup> <input type="checkbox"/> DC - Dual Circuit <sup>3</sup> <input type="checkbox"/> EC - Emergency Circuit <input type="checkbox"/> CB - Casambi Bluetooth <sup>4</sup> <input type="checkbox"/> JD - JDRF Autonomy Sensor (DA4) <sup>4</sup> <input type="checkbox"/> DOS - Daylight & Occupancy Sensor (DLA) <sup>4</sup> <input type="checkbox"/> AWN - Athena Wireless Node (DLA) <sup>4</sup>

1. Leave empty.  
 2. Battery Pack per 4 ft section.  
 3. Control Downlight/Uplight separately.  
 4. Available in sizes 4 ft and up.
**LUMEN OUTPUT W/ft:**

Watts	30K	35K	40K
3 W	395 lm	405 lm	415 lm
5 W	660 lm	675 lm	690 lm
8 W	1050 lm	1080 lm	1130 lm

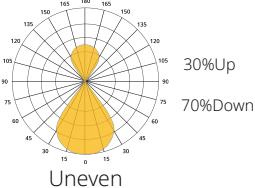



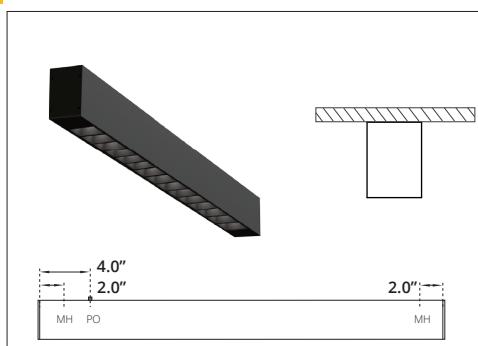

**Project:**
**Type:**

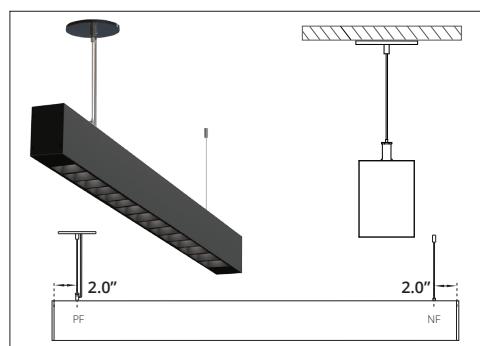
**SIZE:**

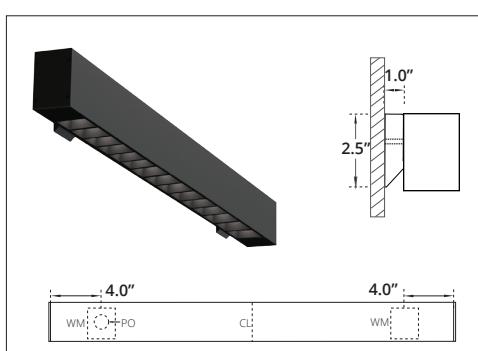

Size	L (Total Length)
1 ft	11.34 in
2 ft	22.34 in
3 ft	33.34 in
4 ft	48.22 in
5 ft	59.22 in
6 ft	71.97 in
7 ft	82.97 in
8 ft	95.72 in

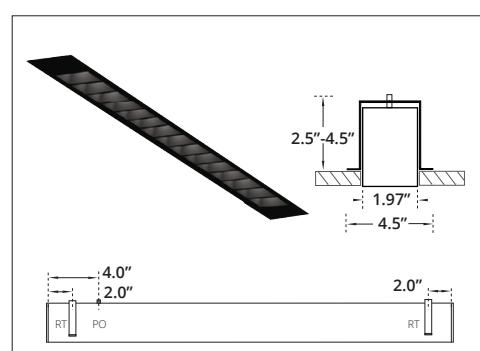
1. L is Total length with endcaps
2. Extrusion length included filler plate.
3. 1-3 ft, no filler plate required.
4. 4-8 ft, filler plates at the end.
5. Continuous Run, filler plates in between & at the end.

**CONTINUOUS RUN:**

**BEAM:**

**MOUNTING:**

**SURFACE MOUNT**

 MH - Mounting Hole  
 PO - Power Opening

**SUSPENDED**

 PF - Power Feed  
 NF - Non Power Feed

**WALL MOUNT**

 PO - Power Opening  
 WM - Wall Mount Bracket  
 1-3 ft, single Wall Mount Bracket with Power Opening in the centre.

**RECESSED TRIMLESS**

 RT - Recessed Trimless Bracket  
 PO - Power Opening  
 Cutout Dimensions = Total Length x Width of Extrusion.

**REFLECTORS:**
**SQUARE**

**WHITE**

**SILVER**

**BLACK**

**GOLD**

**RED**

**GUNMETAL**