

### FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

### SPECIFICATION:

**ED RECTANGLE+**

Enter the order code into the boxes above.

#### SIZE

☐  Ft\*  
\*1-8 Ft Arm length.

#### SOURCE

☐ 5 W/Ft  
☐ 7 W/Ft  
☐ 10 W/Ft

#### RADIANCE

☐ DD - Direct (100%Down)  
\*Light distribution.

#### VOLTAGE

☐ UNV - 120/277V  
☐ 347V\*  
\*Not available for all configurations.

#### DRIVER

☐ ST - On/Off  
☐ DL - 0-10V Dimming (1%)  
☐ DLO - 0-10V Dimming (to Off)  
☐ DL2 - 0-10V Dimming (2 Channels)  
☐ DA4 - DALI D4i  
☐ DMX - DMX RGBW  
☐ \*  
\*Specify dimming protocol.

#### MOUNTING

☐ S6B - 6Ft Cord BK\*  
☐ S6W - 6Ft Cord WH\*  
☐ S  Feet\*\*  
☐ WF - Wall Flush  
☐ SF - Surface Mount  
☐ RT - Recessed Trimless  
\*Canopy will match the Cord color.  
\*\*Specify Suspension length and color.

#### LENS

☐ OP - Opal  
☐ PR - Prismatic

#### FINISH

☐ BK - Black\*  
☐ WH - White\*\*  
☐ CF/RAL \*\*\*  
\*RAL 9005  
\*\*RAL 9016  
\*\*\*Specify required RAL number.

#### CCT

☐ 30K - 3000 Kelvin/90CRI  
☐ 35K - 3500 Kelvin/90CRI  
☐ 40K - 4000 Kelvin/90CRI  
☐ RGBW  
☐ TW - Tunable White\*  
(2700K-6500K)  
☐ \*\*  
\*Available with 0-10V, Dali or Bluetooth controls.  
\*\*Specify required CCT.

#### OPTIONS

☐ No Options\*  
☐ DR - Damp Rated  
☐ CB - Casambi/Bluetooth  
☐ \*\*  
\*Leave empty.  
\*\*Specify required option.

### LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm




Declare.

Project:

Type:


SIZE:

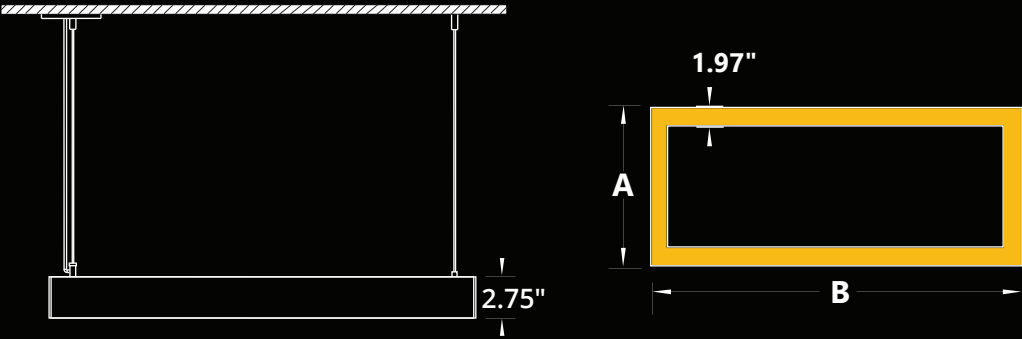


Size	A x B
1 Ft	13.67 In
2 Ft	26.42 In
3 Ft	37.42 In
4 Ft	50.20 In
5 Ft	61.20 In
6 Ft	73.92 In
7 Ft	84.92 In
8 Ft	97.67 In

\*A - Arm Length


RADIANCE:




MOUNTING:

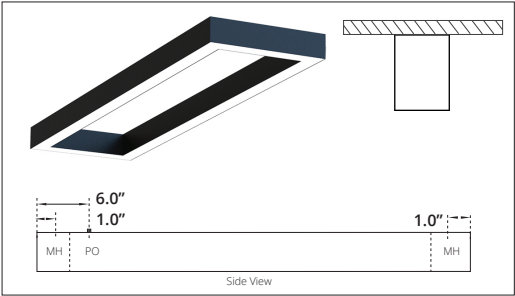


**SURFACE MOUNT**  
MH - Mounting Hole  
PO - Power Opening

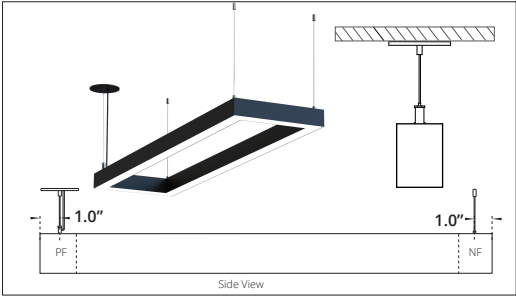

**SUSPENDED**  
PF - Power Feed  
NF - Non Power Feed

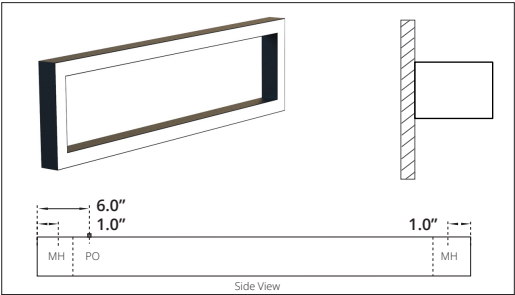

**WALL FLUSH**  
MH - Mounting Hole  
PO - Power Opening

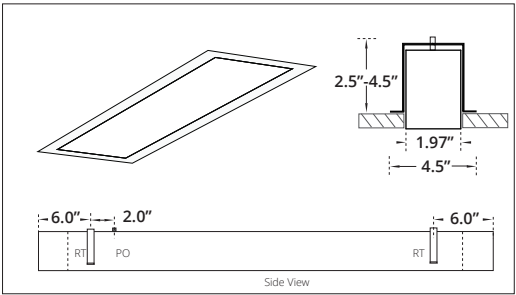

**RECESSED TRIMLESS**  
RT - Recessed Trimless Bracket  
PO - Power Opening  
\*Cutout Dimensions = Total Length x Width of Extrusion.