



**FEATURES:**

- ✓ Architectural luminaire with direct-indirect lighting distribution.
- ✓ Light source: LED Tape.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire is made from curved aluminum profile.
- ✓ Suitable for suspended and surface mounted installations.
- ✓ Extruded aluminum body comes with black or white finish.
- ✓ Remote driver is mounted in round ceiling canopy or optional rectangle enclosure.
- ✓ LED tape is rated for 50,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

**SPECIFICATION:**

**ED ORBIT+**  SIZE —  SOURCE —  RADIANCE —  VOLTAGE —  DRIVER —  MOUNTING —  LENS —  FINISH —  CCT —  OPTIONS

Enter the Product Code into the boxes above.

**SIZE**

- 2 Feet
- 3 Feet
- 4 Feet
- \*

\* Please specify required size.

**SOURCE**

- 25WLED
- 50WLED
- 75WLED\*

\*Available for 4 Feet.  
\*\*Other Wattages are available.

**RADIANCE**

- IL - Inner Lit (100% Inward)
- OL - Outer Lit (100%Outward)

\*Light Distribution.

**VOLTAGE**

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

**DRIVER**

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- WZ - Wiz\*\*
- \*

\* Please specify dimming method (ELV).  
\*\*Remote driver only.

**MOUNTING**

- C4-Canopy 4Feet\*
- C6-Canopy 6Feet\*
- C  Feet\*\*
- D4-Drop 4Feet
- D6-Drop 6Feet
- D  Feet\*\*
- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S  Feet\*\*
- SF - Surface Mount

\*Canopy installation is not available for custom sizes.

\*\*Please specify required length.

\*\*\*Remote Driver only.

**LENS**

- OP - Opal

**FINISH**

- BK - Black
- WH - White
- CF - Custom  RAL#

**CCT**

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin
- RGBW

\*Other options are available.

**LUMEN OUTPUT:**



Watts	30K	35K	40K
25W	2205 lm	2250 lm	2295 lm
50W	4410 lm	4500 lm	4590 lm
75W	6610 lm	6750 lm	6890 lm



Project:



Type:

**SIZE:**

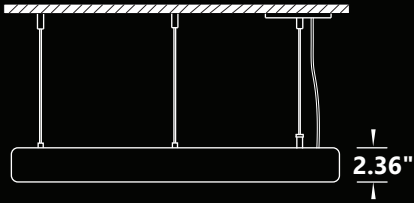

Diameter		
Size	Outer Lit	Inner Lit
2 Feet	27.952 Inch	25.196 Inch
3 Feet	34.250 Inch	37.795 Inch
4 Feet	46.456 Inch	44.094 Inch

**RADIANCE:**

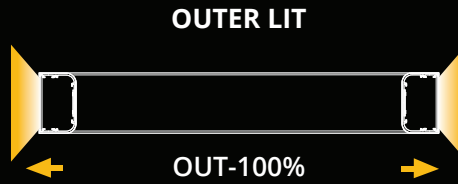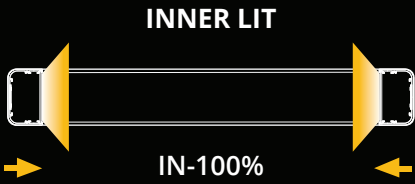

**MOUNTING:**



SUSPENDED - CEILING CANOPY



SUSPENDED - STRAIGHT WIRE\*

\*Remote Driver.



DROP SUSPENSION\*

\*Remote Driver.



SURFACE MOUNT\*

\*Remote Driver.