

FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: 11" Curved LED Board.
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ 7 cell LEDiL curved reflector is available in several standard finishes.
- ✓ Offered with regular 50°/16UGR and flood 80°/19UGR internal optic.
- ✓ Low profile steel body housing contains a built-in driver.
- ✓ Suitable for non-insulated recessed installations into T-Bar or drywall.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ LED's are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:



Enter the Product Code into the boxes above.

SOURCE

- 20W LED
- 30W LED
- 40W LED

RADIANCE

- DD - Direct (100%Down) *Light Distribution.

VOLTAGE

- 120V
 - 277V
 - 347V*
- * Not available for all configurations.

DRIVER

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- BT - Bluetooth
- EM - Emergency*
- **

*Emergency battery pack.
** Please specify dimming method.

MOUNTING

- RS - Recessed
- DW - Drywall

REFLECTOR

- BK - Black
- WH - White
- SL - Silver

LENS

- RB - Regular 50°
- FB - Floor 80°

FINISH

- BK - Black
- WH - White

CCT

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin

*Other options are available.

OPTIONS

- No Options*
- DOS - Daylight & Occupancy Sensor


*Leave Empty.

DIMENSIONS:

| Length | Width | Height |
|--------|--------|--------|
| 23.75" | 23.75" | 1.50" |

LUMEN OUTPUT:

| Watts | 30K | 35K | 40K |
|-------|--------|--------|--------|
| 20W | 2450lm | 2500lm | 2550lm |
| 30W | 3675lm | 3750lm | 3825lm |
| 40W | 4900lm | 5000lm | 5100lm |

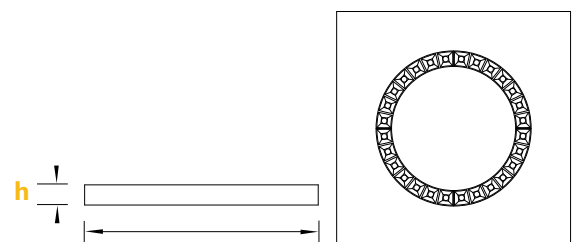

Project:

Type:



Declare.