

**FEATURES:**

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: 11" LED Modular Board.
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ 7 cell LEDiL reflector is available in several standard finishes.
- ✓ Offered with regular 50°/16UGR and flood 80°/19UGR internal optic.
- ✓ Low profile steel body housing contains a built-in driver.
- ✓ Suitable for non-insulated recessed installations into T-Bar or drywall.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ LED's are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**

**ED LINE4+**  SOURCE —  RADIANCE —  VOLTAGE —  DRIVER —  MOUNTING —  REFLECTOR —  LENS —  FINISH —  CCT —  OPTIONS

Enter the Product Code into the boxes above.

**SOURCE**

- 20W LED
- 30W LED
- 40W LED

**RADIANCE**

- DD - Direct (100%Down) \*Light Distribution.

**VOLTAGE**

- 120V
  - 277V
  - 347V\*
- \* Not available for all configurations.

**DRIVER**

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- BT - Bluetooth
- EM - Emergency\*
- \*\*

\*Emergency battery pack.  
\*\* Please specify dimming method.

**MOUNTING**

- RS - Recessed
- DW - Drywall

**REFLECTOR**

- WH - White
- BK - Black
- SL - Silver

**LENS**

- RB - Regular 50°
- FB - Flood 80°

**FINISH**

- WH - White
- BK - Black
- GR - Grey

**CCT**

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin

\*Other options are available.

**OPTIONS**


- No Options\*
  - DOS - Daylight & Occupancy Sensor
- \*Leave Empty.

**DIMENSIONS:**

Length	Width	Height
23.75"	23.75"	1.50"

**LUMEN OUTPUT:**

Watts	30K	35K	40K
20W	2450lm	2500lm	2550lm
30W	3675lm	3750lm	3825lm
40W	4900lm	5000lm	5100lm

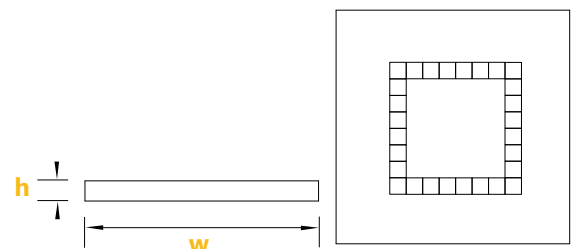

Project: \_\_\_\_\_

Type: \_\_\_\_\_