

FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED TRIAD+

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

SIZE

Feet*

*1-8 Feet Arm length.

SOURCE

- ☐ 5W/Ft LED
- ☐ 7W/Ft LED
- ☐ 10W/Ft LED

RADIANCE

☐ DD - Direct (100%Down)

*Light Distribution.

VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V*

*Not available for all configurations.

DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dimming (1%)
- ☐ DLO - 0-10V Dimming (to Off)
- ☐ DL2 - 0-10V Dimming (2 Channels)
- ☐ DA4 - DALI D4i
- ☐ DMX - DMX RGBW
- ☐ *

* Please specify dimming method.

MOUNTING

- ☐ S6W - 6Ft Cord WH*
- ☐ S6B - 6Ft Cord BK*
- ☐ S Feet**
- ☐ WF - Wall Flush
- ☐ SF - Surface Mount
- ☐ RT - Recessed Trimless

*Canopy will match the Cord color.
**Specify Suspension length and color.

LENS

- ☐ OP - Opal
- ☐ PR - Prismatic

FINISH

- ☐ BK - Black*
- ☐ WH - White**
- ☐ CF/RAL ***

*RAL 9005
**RAL 9016
***Specify required RAL number.

CCT

- ☐ 30K/90CRI - 3000 Kelvin
- ☐ 35K/90CRI - 3500 Kelvin
- ☐ 40K/90CRI - 4000 Kelvin
- ☐ RGBW
- ☐ TW - Tunable White*
(2700K-6500K)
- ☐ **

*Available with 0-10V, Dali or Bluetooth controls.
**Specify required CCT.

OPTIONS

- ☐ No Options*
- ☐ DR - Damp Rated
- ☐ CB - Casambi/Bluetooth
- ☐ **

*Leave empty.
**Specify required option.

LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm




Declare.

Project:

Type:

SIZE:

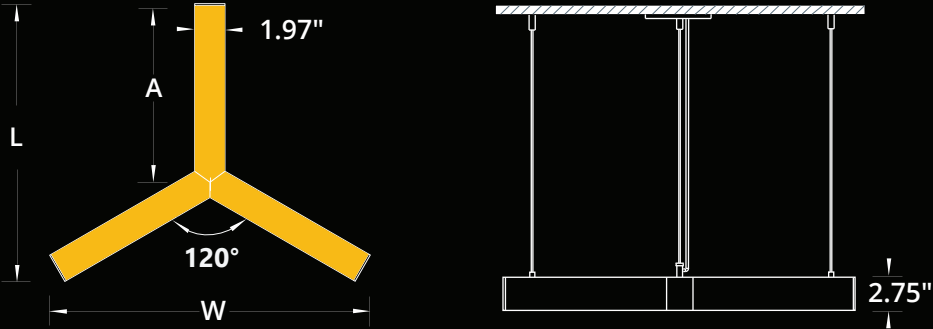


Size	A	L x W
1 Feet	11.70	18.40 x 21.25
2 Feet	24.45	37.53 x 43.33
3 Feet	35.45	54.03 x 62.39
4 Feet	48.20	73.15 x 84.47
5 Feet	59.20	89.65 x 103.52
6 Feet	71.95	108.78 x 125.61
7 Feet	82.95	125.28 x 144.66
8 Feet	95.70	144.40 x 166.74

A - Arm Length
 L - Total Length
 W - Total Width
 *All dimensions are in Inches.


RADIANCE:




MOUNTING:

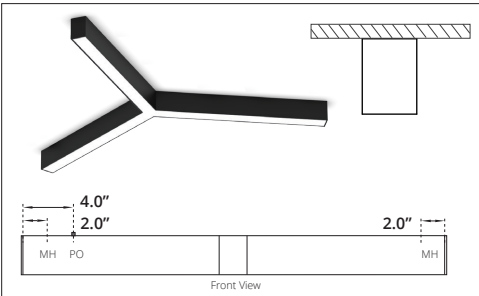


SURFACE MOUNT
 MH - Mounting Hole
 PO - Power Opening

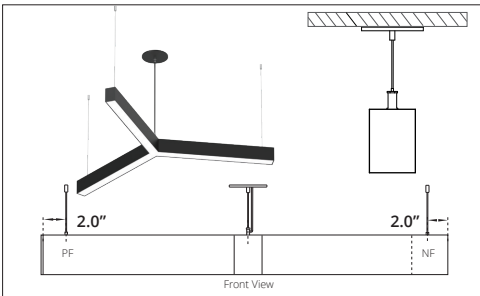

SUSPENDED
 PF - Power Feed
 NF - Non Power Feed

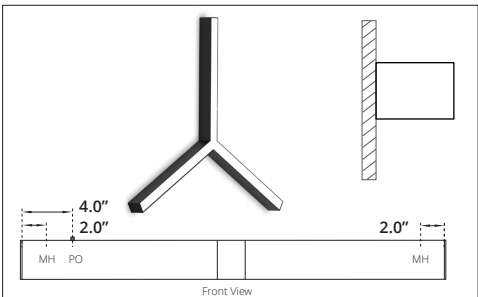

WALL FLUSH
 MH - Mounting Hole
 PO - Power Opening

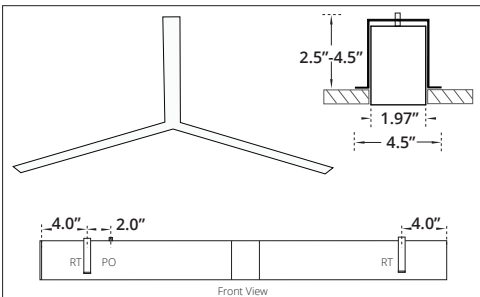

RECESSED TRIMLESS
 RT - Recessed Trimless Bracket
 PO - Power Opening
 *Cutout Dimensions = Total Length x Width of Extrusion.