

## FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a high efficiency opal lens.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for suspended, wall mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED Strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**ED VECTOR5+**  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

### SIZE

\_\_\_\_ ft  
1-8 ft  
Continuous Run  
(0.5 ft Increments)

### SOURCE

5 W/ft  
 7 W/ft  
 10 W/ft

### RADIANCE

DD - Direct  
 ED - Even  
 UD - Uneven<sup>1</sup>

1. Available in sizes 4 ft and up.

### VOLTAGE

UNV - 120/277V  
 347V<sup>1</sup>

1. Verify availability.

### DRIVER

ST - On/Off  
 DL - 0-10V Dim (1%)  
 DLO - 0-10V Dim (to Off)  
 DL2 - 0-10V Dim (TW)  
 DLA - 0-10V Dim (Aux)  
 DA4 - DALI D4i  
 CV - Constant Voltage (RGBW)  
  

Specify dimming protocol.

### MOUNTING

S6B - 6Ft Cord BK<sup>1</sup>  
 S6W - 6Ft Cord WH<sup>1</sup>  
 S  Feet<sup>2</sup>  
 WM - Wall Mount  
 WF - Wall Flush

1. Canopy match the Cord color.  
2. Specify Suspension length/color.

### LENS

OP - Opal

### FINISH

BK - Black<sup>1</sup>  
 WH - White<sup>2</sup>  
 CF/RAL

1. RAL 9005  
2. RAL 9016  
Specify required RAL number.

### CCT

30K - 3000 Kelvin/90CRI  
 35K - 3500 Kelvin/90CRI  
 40K - 4000 Kelvin/90CRI  
 RGBW<sup>1</sup>  
 TW - Tunable White (27K-65K)<sup>2</sup>  
  

1. Available with DMX or CB.  
2. Available with DL2, DA4 or CB.  
Specify required CCT.

### OPTIONS

No Options<sup>1</sup>  
 EM - Emergency Battery Pack<sup>2</sup>  
 DC - Dual Circuit<sup>3</sup>  
 EC - Emergency Circuit  
 DR - Damp Rated  
 CB - Casambi Bluetooth(TW, RGBW)<sup>4</sup>  
 DMX - DMX (RGBW)  
 JD - JDRF Autonomy Sensor (DA4)<sup>4</sup>  
 DOS - Daylight & Occupancy Sensor (DLA)<sup>4</sup>  
 AWN - Athena Wireless Node (DLA)<sup>4</sup>

1. Leave empty.  
2. Battery Pack per 4 ft section.  
3. Control Downlight/Uplight separately.  
4. Available in sizes 4 ft and up.

## LUMEN OUTPUT W/ft:

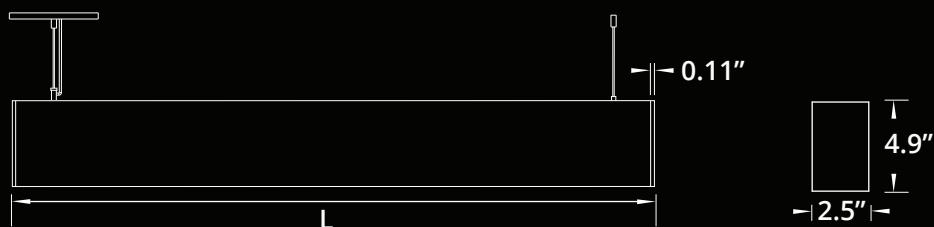
Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



Declare.<sup>®</sup>

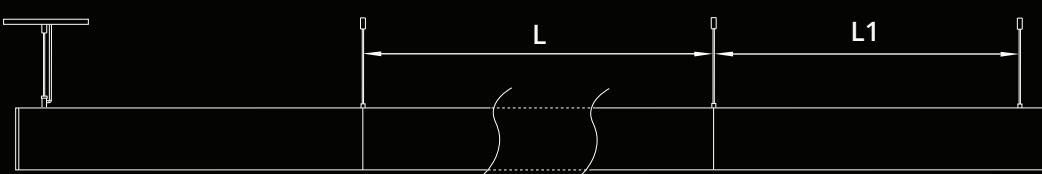
Project:

Type:

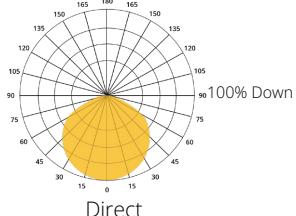
**SIZE:**


Size	L
1 ft	11.50 in
2 ft	24.25 in
3 ft	35.25 in
4 ft	48.00 in
5 ft	59.00 in
6 ft	71.75 in
7 ft	82.75 in
8 ft	95.50 in

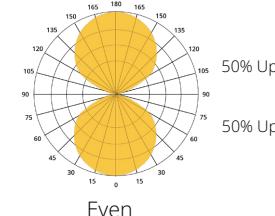
L - Linear extrusion length only.  
 Total length with Endcaps = L + (2 x 0.11)

**CONTINUOUS RUN:**


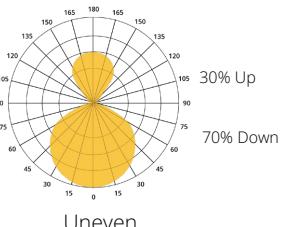
Continuous Run suspension dimensions  
 L1 = L - 2.0 in

**RADIANCE:**


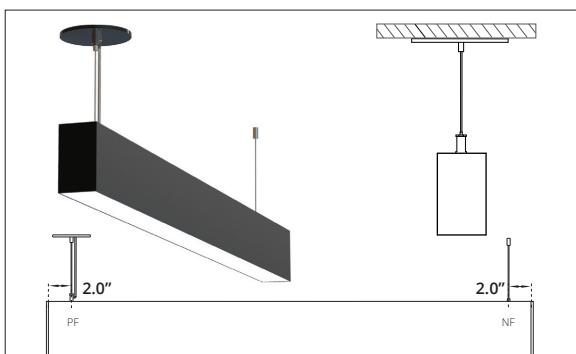
Direct

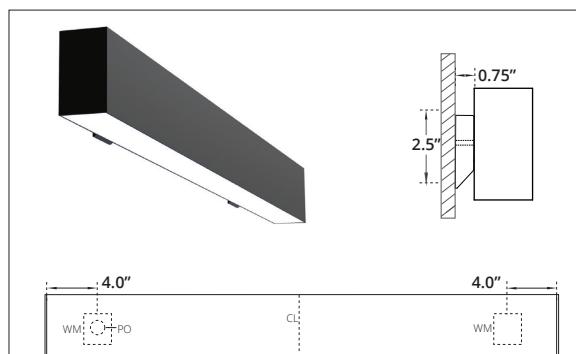


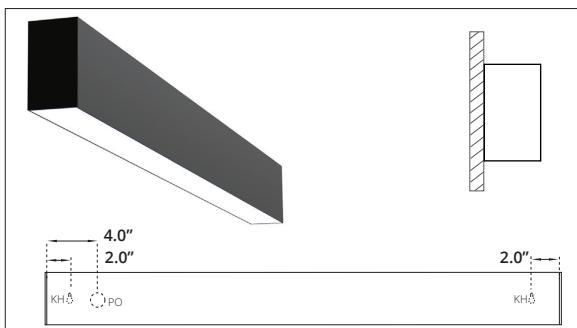
Even

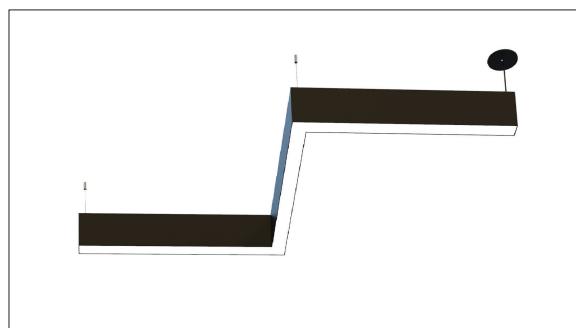


Uneven

**MOUNTING:**

**SUSPENDED**

 PF - Power Feed  
 NF - Non Power Feed

**WALL MOUNT**

 PO - Power Opening  
 WM - Wall Mount Bracket  
 1-3 ft, single Wall Mount Bracket with Power Opening in the centre.

**WALL FLUSH**

 KH - Key Hole  
 PO - Power Opening

**VARIABLE ANGLE**

60°, 90°, 120°, 135° or Custom.