

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Even illumination is provided by variety of high efficiency optic lenses.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface,suspended,recessed and damp area installations.
- ✓ Extruded aluminum body comes with black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED VECTOR+ — — — — — — — — —

Enter the Product Code into the boxes above.

SIZE

_____ Feet*

* 1-8 Feet Continuous Run (0.5 Feet Increments)

SOURCE

- ☐ 5W/Ft LED
- ☐ 7W/Ft LED
- ☐ 10W/Ft LED

RADIANCE

- ☐ DD - Direct (100%Down)
- ☐ ID - Indirect (100%Up)**
- ☐ UD - Uneven(70%Down/30%Up)**

*Light Distribution.
**Not available for Surface Mount Configuration.

VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V*

*Not available for all configurations.

DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dimming (1%)
- ☐ DLO - 0-10V Dimming (to Off)
- ☐ DL2 - 0-10V Dimming (2Channels)
- ☐ DA4 - DALI D4i
- ☐ DMX - DMX RGBW
- ☐ EM - Emergency Driver*
- ☐ **

* Battery Pack per 4Feet section.
** Please specify dimming protocol.

MOUNTING

- ☐ S6W - 6Ft Cord WH*
- ☐ S6B - 6Ft Cord BK*
- ☐ S Feet**
- ☐ WM - Wall Mount
- ☐ WF - Wall Flush
- ☐ SF - Surface Mount
- ☐ RT - Recessed Trimless

*Canopy will match the Cord color.
**Please specify Suspension length and color.

LENS

- ☐ OP - Opal
- ☐ WW - Wall Wash
- ☐ PR - Prismatic

FINISH

- ☐ BK - Black*
- ☐ WH - White**
- ☐ CF - Custom RAL# ***

*RAL#9005
**RAL#9016
***Please specify required RAL number.

CCT

- ☐ 30K/90CRI - 3000Kelvin
- ☐ 35K/90CRI - 3500Kelvin
- ☐ 40K/90CRI - 4000Kelvin
- ☐ RGBW
- ☐ TW - Tunable White* (2700K-6500K)
- ☐ **

*Available with 0-10V,Dali or Bluetooth controls.
**Please specify required CCT.

OPTIONS

- ☐ No Options*
- ☐ DR - Damp Rated
- ☐ DC - Dual Circuit**
- ☐ CB - Casambi/Bluetooth
- ☐ JD - JDRF Autonomy Sensor
- ☐ DOS - Daylight & Occupancy Sensor
- ☐ ***

*Leave Empty.
**Down /Up Control separately.
***Please specify required option.

LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm





Declare.

Project:

Type:


SIZE:

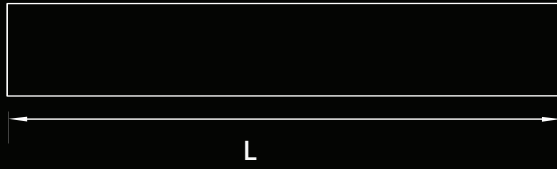

Size	L (Extrusion Length)
1 Feet	11.50 Inch
2 Feet	24.25 Inch
3 Feet	35.25 Inch
4 Feet	48.00 Inch
5 Feet	59.00 Inch
6 Feet	71.75 Inch
7 Feet	82.75 Inch
8 Feet	95.50 Inch

Total Length with Endcaps = L + 0.22"

SUSPENDED CONFIGURATIONS:



Single Extrusion



Continuous Extrusions

RADIANCE:




DIRECT DISTRIBUTION




UNEVEN DISTRIBUTION

MOUNTING:

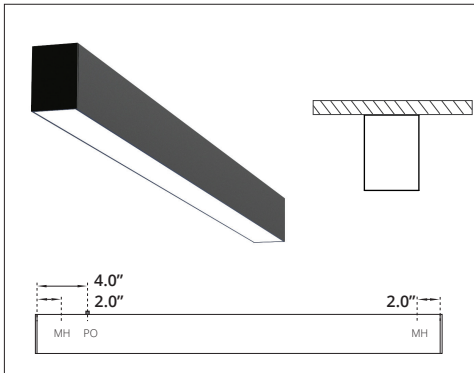


SURFACE MOUNT

MH - Mounting Hole
PO - Power Opening

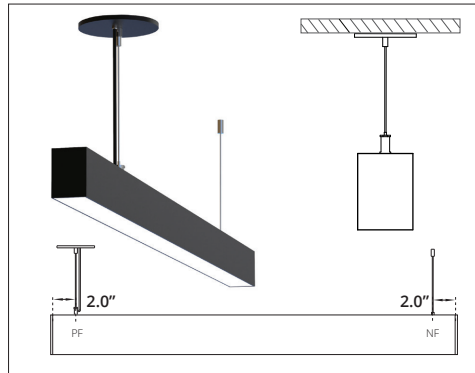


SUSPENDED

PF - Power Feed
NF - Non Power Feed

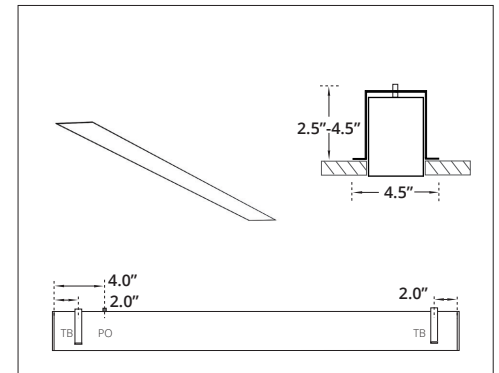


RECESSED TRIMLESS

TB - Trimless Bracket
PO - Power Opening

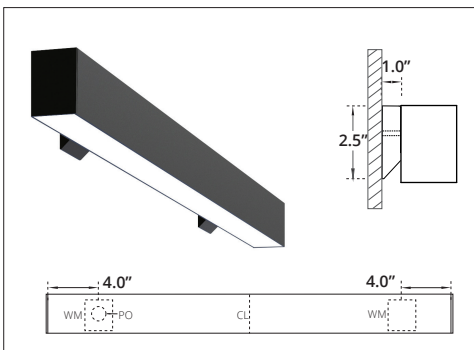


WALL MOUNT

PO - Power Opening
WM - Wall Mount Bracket
*1-3 Feet Extrusions will have a single Wall Mount Bracket in the centre.

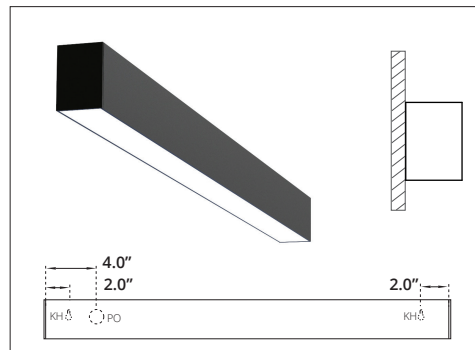

WALL FLUSH

KH - Key Hole
PO - Power Opening

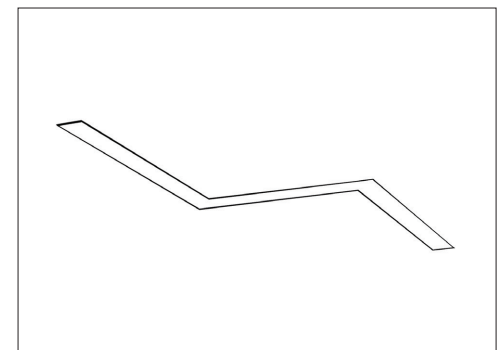

VARIABLE ANGLE

60° - 90° - 120° - 135°