



## FEATURES:

- ✓ Architectural luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines aluminum body with a high efficiency opal lens.
- ✓ Suitable for surface, suspended installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LED Strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

**reinventlight**

## SPECIFICATION:

**ED DRUM+**


Enter the Product Code into the boxes above.

**SIZE**

- 2 ft
- 3 ft
- 4 ft
- ft

Specify custom size.

**SOURCE**

- 25 W
- 50 W
- 75 W<sup>1</sup>

 1. Available for 4ft & Custom sizes.  
 2. Other Wattages are available.

**RADIANCE**

- DD - Direct
- UD - Uneven

**VOLTAGE**

- UNV - 120/277V
- 347V<sup>1</sup>

1. Verify availability.

**DRIVER**

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- DLA - 0-10V Dim (Aux)
- DA4 - DALI D4i
- CV - Constant Voltage (RGBW)
- 

Specify dimming protocol.

**MOUNTING**

- C6B - 6 ft Canopy BK<sup>1</sup>
- C6W - 6 ft Canopy WH<sup>1</sup>
- C  ft<sup>2</sup>
- S6B - 6 ft Cord BK<sup>1</sup>
- S6W - 6 ft Cord WH<sup>1</sup>
- S  ft<sup>2</sup>
- R6B - Stem 6 ft BK<sup>1</sup>
- R6W - Stem 6 ft WH<sup>1</sup>
- R  ft<sup>2</sup>
- SF - Surface Mount

 1. Canopy will match the Cord color.  
 2. Specify Suspension length and color.  
 3. Stem Mounting, available only for 2ft size.

**LENS**

- OP - Opal

**FINISH**

- BK - Black<sup>1</sup>
- WH - White<sup>2</sup>
- CF/RAL

 1. RAL 9005  
 2. RAL 9003  
 Specify required RAL number.

**CCT**

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW<sup>1</sup>
- TW - Tunable White (27K-65K)<sup>2</sup>
- 

 1. Available with DMX or CB.  
 2. Available with DL2, DA4 or CB.  
 Specify required CCT.

**OPTIONS**

- No Options<sup>1</sup>
- DC - Dual Circuit<sup>2</sup>
- EC - Emergency Circuit
- CB - Casambi Bluetooth(TW, RGBW)
- DMX - DMX (RGBW)
- AWN - Athena Wireless Node (DLA)

 1. Leave empty.  
 2. Control Downlight/Uplight separately.


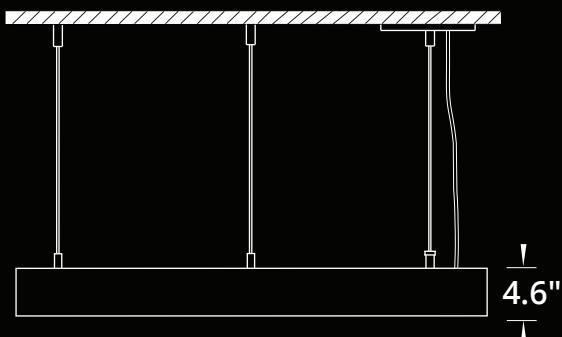


**LUMEN OUTPUT:**

Watts	30K	35K	40K
25 W	2610 lm	2650 lm	2690 lm
50 W	5150 lm	5250 lm	5380 lm
75 W	7720 lm	7875 lm	8030 lm

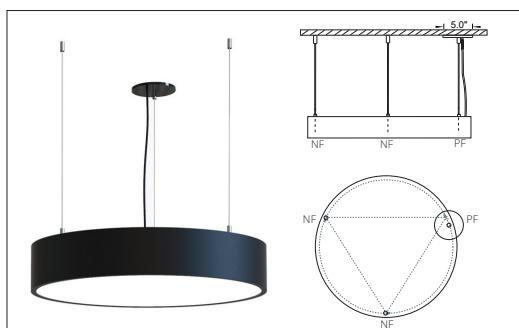


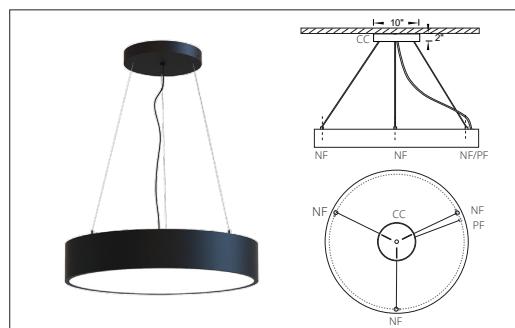
Declare.

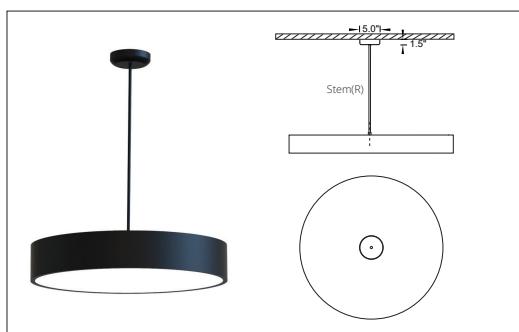
**Project:**
**Type:**

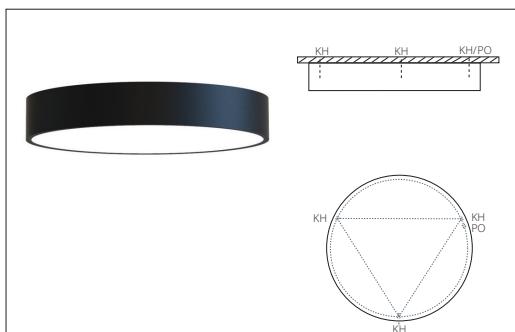
**SIZE:**

**RADIANCE:**


Size	Diameter
2 ft	23.60 in
3 ft	35.40 in
4 ft	47.20 in

**MOUNTING:**

**SUSPENDED - STRAIGHT WIRE**

 PF - Power Feed  
 NF - Non Power Feed

**SUSPENDED - CEILING CANOPY**

 CC - Ceiling Canopy - Available for 2-3-4 ft sizes  
 PF - Power Feed  
 NF - Non Power Feed

**SUSPENDED - STEM**

 Available only for 2ft size.  
 3/8" IPS Stem with Power Feed

**SURFACE MOUNT - (SF)**