



FEATURES:

- Architectural luminaire with direct/indirect light distribution.
- Light source: LED Boards (5.5"/11"/22").
- Luminaire shade combines polyester fabric fused to an acrylic sheet creating a soft and diffused illumination with built-in-driver.
- Double laminated finish includes 2nd outer layer of clear acrylic for improved wipe-down and reduced dirt accumulation.
- Suitable for surface-mounted or suspended installations.
- Proven record in hospitality, long term facilities and healthcare projects.
- LED Boards are rated for 60,000hrs. L80 with +90 CRI.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATIO		ANCE VOLTAGE DRIVER — Enter the Product Code into the boxes	MOUNTING LENS FINISH	CCT OPTIONS
SIZE ☐ 2 Feet	SOURCE 25WLED 50WLED	RADIANCE DI - Direct/Indirect *Light Distribution.	VOLTAGE 120V 277V 347V* *Not available for all configurations. *Functionality and controls may be limited.	DRIVER ST - Standard (Non-Dimming) DL - 0-10V Dimming (1%) DA - DALI BT - Bluetooth "" *Please specify dimming method.
MOUNTING C4 - Canopy 4 Feet C6 - Canopy 6 Feet C Feet* S4 - Straight 4 Feet S6 - Straight 6 Feet Feet* R2 - Stem 2 Feet		FINISH WH - White Linen* BK - Black Linen** GR - Grey Linen* CL- Chocolate Linen** JT - Jute* * White Top Plate & Power Cord ** Black Top Plate & Power Cord	30K/90CRI - 3000Kelvin 35K/90CRI - 3500Kelvin 40K/90CRI - 4000Kelvin RGBW* TW - Tunable White** (2700K-6500K) *Available with Dali, DMX or Bluetooth controls. **Available with 0-10V,Dali or Bluetooth controls.	OPTIONS No Options* DL - Double Lamination** BIOS *Leave empty. ** Anti-Microbial Finish

LUMEN OUTPUT:

R Feet* SF - Surface Mount *Please specify required length.

Watts	30K	35K	40K
25W	2610 lm	2650 lm	2690 lm
50W	5150 lm	5250 lm	5380 lm















**** 905-830-0339 / 1-800-667-9281




info@edisonlighting.ca



www.edisonlighting.ca



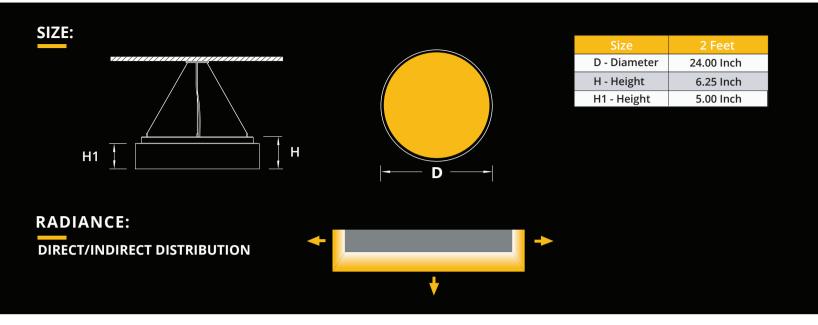

MOUNTING:



SHADE FINISHES:



