



FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency semi-specular integral reflector comes with 40° lighting distribution.
- ✓ Available with an optional flat frame plate for NC installations.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ Choice of integrated reflector for standard downlight or asymmetric wall wash illumination.
- ✓ LED spot is rated for 60,000 hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED RD+ — — — — — — — — —

Enter the Product Code into the boxes above.

SIZE

- 4 In

SOURCE

- 10 W
- 20 W

RADIANCE

- DD - Direct

VOLTAGE

- UNV - 120/277V
 - 347V¹
1. Verify availability.

DRIVER

- ST - On/Off
 - DL - 0-10V Dim (1%)
 -
- Specify required dimming method.

MOUNTING

- RT - Retrofit
- NC - New Const. Plate

BEAM

- BF - Flood 40°
- BA - Asymmetric

TRIM


- BK - Black¹
 - WH - White²
1. RAL 9005
2. RAL 9003

CCT

- 30K - 3000 Kelvin/90CRI
 - 35K - 3500 Kelvin/90CRI
 - 40K - 4000 Kelvin/90CRI
 -
- Specify required CCT.

DIMENSIONS:

Height	Width	Cut Out
5.500"	4.350"	3.750"

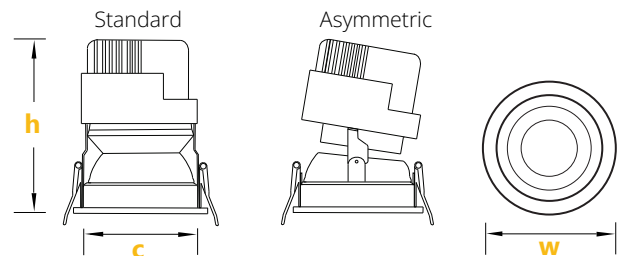


LUMEN OUTPUT:

Watts	30K	35K	40K
10 W	975 lm	1000 lm	1025 lm
20 W	1950 lm	2000 lm	2050 lm

Project:

Type:

DRIVER BOX:

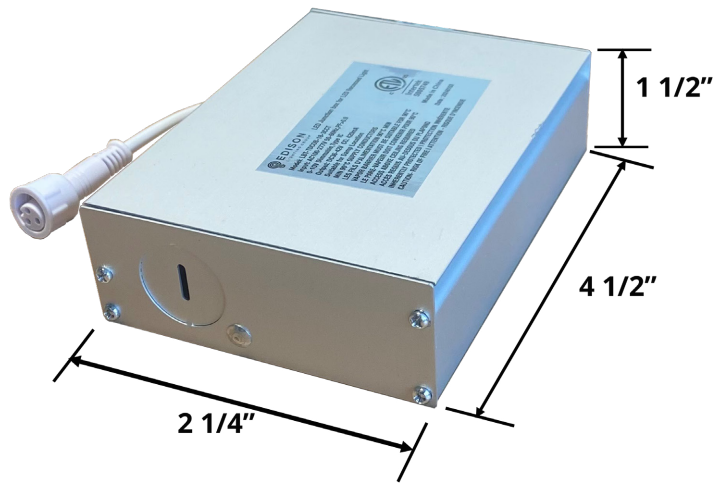

NC PLATE:

