


**FEATURES:**

- ✓ Architectural floor luminaire with direct/indirect distribution.
- ✓ Light source: 11" LED board (direct) and 22" LED board (indirect).
- ✓ Direct lighting is distributed by Dark Optic with precise, low glare illumination.
- ✓ 7 cell LEDiL reflector is available in several standard finishes.
- ✓ Offered with regular 50°/16UGR and flood 80°/19UGR internal optics.
- ✓ Controlled by on/off switch or optional Casambi Bluetooth dimming module.
- ✓ Extruded aluminum body comes in a black or white color.
- ✓ Comes with a standard 8 foot plug-in cord.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

**reinventlight**
**SPECIFICATION:**
**ED VECTOR+**  -  -  -  -  -  -  -  -  - 

Enter the Product Code into the boxes above.

**TYPE**
 FL - Floor Lamp

**SOURCE**
 20 W  
 30 W

**RADIANCE**
 DI - Direct/Indirect

**VOLTAGE**
 UNV - 120/277V

**DRIVER**
 ST - On/Off  
 DL - 0-10V Dim (1%)  
 DLO - 0-10V Dim (to Off)  
 DA4 - DALI D4i  
    
 Specify dimming protocol.

**BEAM**
 BF - Flood 50°  
 BW - Wide 80°

**REFLECTOR**
 SB - Black  
 SW - White  
 SL - Silver

**FINISH**
 BK - Black<sup>1</sup>  
 WH - White<sup>2</sup>  
 1. RAL 9005  
 2. RAL 9016

**CCT**
 30K - 3000 Kelvin/90CRI  
 35K - 3500 Kelvin/90CRI  
 40K - 4000 Kelvin/90CRI  
    
 Specify required CCT.

**OPTIONS**
 No Options<sup>1</sup>  
 DC - Dual Circuit<sup>2</sup>  
 CB - Casambi Bluetooth(DL)  
 JD - JDRF Autonomy Sensor (DA4)  
 AWN - Athena Wireless Node (DLA)

1. Leave empty.

2. Control Downlight/Uplight separately.




BLACK

WHITE


SILVER

**DIMENSIONS:**

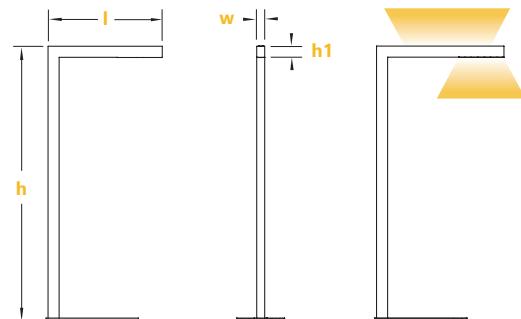
Length	Width
27.75 in	2.00 in
Height	Height 1
79.00 in	2.75 in
Base Plate	12.00 in x 22.88 in

**BEAM:**


Flood Beam



Wide Beam


**LUMEN OUTPUT:**

Watts	30K	35K	40K
20 W	2295 lm	2340 lm	2385 lm
30 W	3340 lm	3510 lm	3580 lm


**Project:**
**Type:**