


FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a high-efficiency opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight
SPECIFICATION:
ED RECTANGLE+ SIZE SOURCE RADIANCE VOLTAGE DRIVER MOUNTING LENS FINISH CCT OPTIONS

Enter the Product Code into the boxes above.

SIZE

_____ x _____ ft

1-8 ft Arm length.

SOURCE

- 5 W/ft
- 7 W/ft
- 10 W/ft

RADIANCE

- DD - Direct

VOLTAGE

- UNV - 120/277V

- 347V¹

1. Verify availability.

DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- DLA - 0-10V Dim (Aux)
- DA4 - DALI D4i
- CV - Constant Voltage (RGBW)
-

Specify dimming protocol.

MOUNTING

- S6B - 6ft Cord BK¹
- S6W - 6ft Cord WH¹
- S _____ ft²
- SF - Surface Mount
- RT - Recessed Trimless

 1. Canopy match the Cord color.
 2. Specify Suspension length/color.

LENS

- OP - Opal

FINISH

- BK - Black¹
- WH - White²
- CF/RAL

 1. RAL 9005
 2. RAL 9016
 Specify required RAL number.

CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW¹
- TW - Tunable White (27K-65K)²
-

1. Available with DMX or CB.

2. Available with DL2, DA4 or CB.

Specify required CCT.

OPTIONS

- No Options¹
- EC - Emergency Circuit
- CB - Casambi Bluetooth(TW, RGBW)
- DMX - DMX (RGBW)
- JD - JDRF Autonomy Sensor (DA4)
- DOS - Daylight & Occupancy Sensor (DLA)
- AWN - Athena Wireless Node (DLA)

1. Leave empty.

LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



Declare.

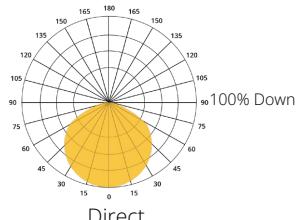
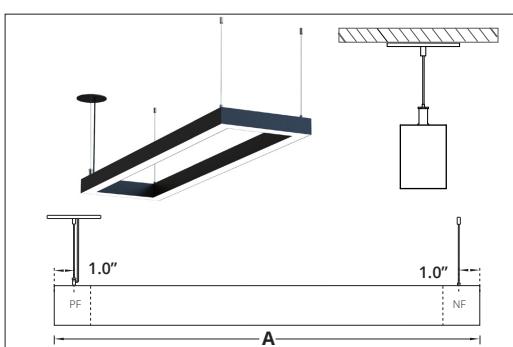
Project:
Type:

905-830-0339 / 1-800-667-9281

info@edisonlighting.ca

www.edisonlighting.ca

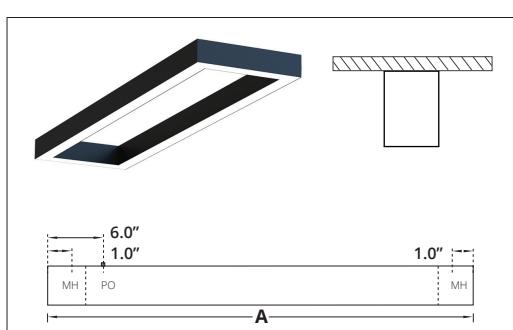
SIZE:

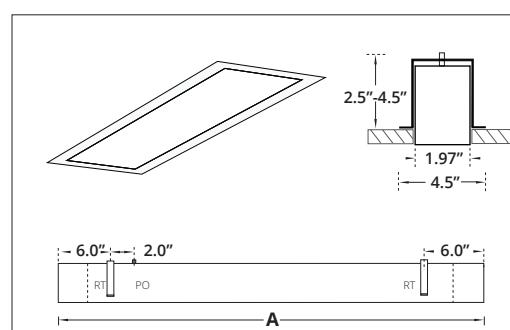
RADIANCE:

MOUNTING:

SUSPENDED

 PF - Power Feed
 NF - Non Power Feed

Size	A x B
1 ft	13.67 in
2 ft	26.42 in
3 ft	37.42 in
4 ft	50.20 in
5 ft	61.20 in
6 ft	73.92 in
7 ft	84.92 in
8 ft	97.67 in

A - Arm Length


SURFACE MOUNT

 PO - Power Opening
 MH - Mounting Hole

RECESSED TRIMLESS

 PO - Power Opening
 RT - Recessed Trimless Bracket
 Cutout Dimensions = Total Length x Width of Extrusion.