


**FEATURES:**

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with an opal lens insert provides excellent lighting distribution.
- ✓ Available with Spot 25°, Flood 45° and Wide Flood 60° beam angles.
- ✓ Aluminum body of the luminaire comes with a built-in-driver.
- ✓ Suitable for surface mounted and suspended installations.
- ✓ LED spot is rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

**reinventlight**
**SPECIFICATION:**
**ED PIPE+**  -  -  -  -  -  -  -  -  - 

Enter the Product Code into the boxes above.

**SIZE**

- 11 in
- 22 in
- 33 in

**MOUNTING**

- S6B - 6 ft Cord BK<sup>1</sup>
- S6W - 6 ft Cord WH<sup>1</sup>
- S  ft<sup>2</sup>
- SF - Surface Mount

 1. Canopy match the Cord color.  
 2. Specify Suspension length.

**SOURCE**

- 10 W
- 15 W
- 20 W

**BEAM**

- BS - Spot 25°
- BF - Flood 45°
- BW - Wide 60°

**RADIANCE**

- DD - Direct

**FINISH**

- BK - Black<sup>1</sup>
- WH - White<sup>2</sup>
- 1. RAL 9005
- 2. RAL 9003

**VOLTAGE**

- UNV - 120/277V

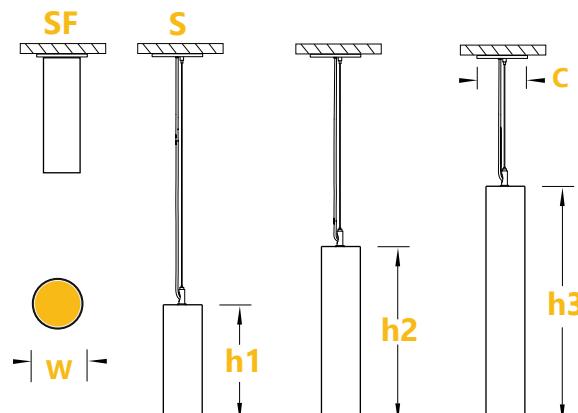
**CCT**

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- 

**DRIVER**

- ST - On/Off
- DL - 0-10V Dim (1%)
- DA4 - DALI D4i
- 

Specify dimming protocol.


**DIMENSIONS:**

Width		Canopy
4.0"	5.0"	
Height		
h1	h2	h3
11.0"	22.0"	33.0"

**LUMEN OUTPUT:**

Watts	30K	35K	40K
10 W	930 lm	950 lm	990 lm
15 W	1395 lm	1425 lm	1475 lm
20 W	1860 lm	1900 lm	1940 lm

Project:

Type: