


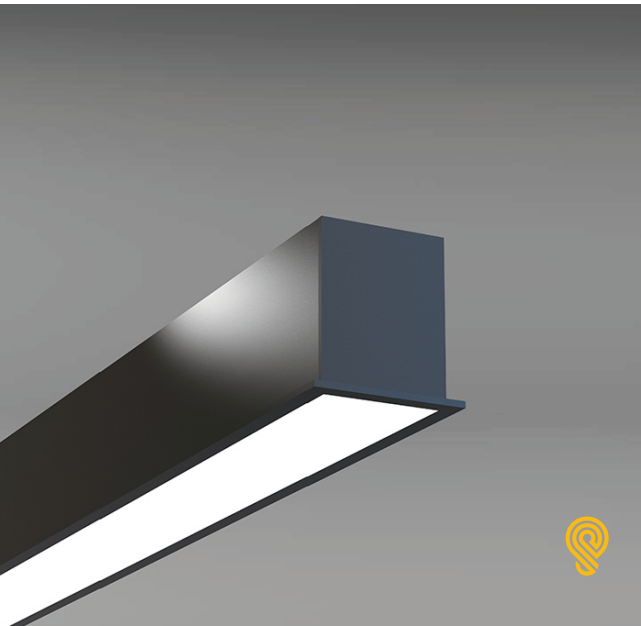

FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a high efficiency opal lens.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for recessed applications in drywall or T-Bar ceilings.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED VECTOR3+ — — — — — — — — — —

Enter the Product Code into the boxes above.

SIZE

____ Ft*
*1-8 Ft
Continuous Run
(0.5 Ft Increments)

SOURCE

- ☐ 5 W/Ft
☐ 7 W/Ft
☐ 10 W/Ft

RADIANCE

- ☐ DD - Direct (100% Down)
*Light Distribution.

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V*
*Not available for all configurations.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ DLA - 0-10V Dim (Aux)
☐ DA4 - DALI D4i
☐ CV - Constant Voltage (RGBW)
☐ *
*Specify dimming protocol.

MOUNTING

- ☐ RS - Recessed
☐ RB - Recessed T-Bar

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black*
☐ WH - White**
☐ CF/RAL ***
*RAL 9005
**RAL 9016
***Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW*
☐ TW - Tunable White (27K-65K) **
☐ ***
* Available with CV & DMX.
**Available with DL2, DA4.
***Specify required CCT.

OPTIONS

- ☐ No Options*
☐ EM - Emergency Battery Pack**
☐ EC - Emergency Circuit
☐ DR - Damp Rated
☐ CB - Casambi Bluetooth(TW, RGBW)
☐ DMX - DMX (RGBW)
☐ JD - JDRF Autonomy Sensor (DA4)
☐ DOS - Daylight & Occupancy Sensor (DLA)
☐ AWN - Athena Wireless Node (DLA)

*Leave empty.
**Battery Pack per 4 Ft section.

LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm



Project:

Type:


SIZE:




Size	L(EXTRUSION LENGTH)	L1(T-BAR)
1 Ft	11.50 In	11.75 In
2 Ft	24.25 In	23.75 In
3 Ft	35.25 In	35.75 In
4 Ft	48.00 In	47.75 In
5 Ft	59.00 In	59.75 In
6 Ft	71.75 In	71.75 In
7 Ft	82.75 In	83.75 In
8 Ft	95.50 In	95.75 In

*Total length with endcaps = L + 0.22"
**Total length with endcaps for Recessed installation.
***L1 is total length with trim for T-Bar installation.


CONTINUOUS RUN:



RADIANCE:




MOUNTING:

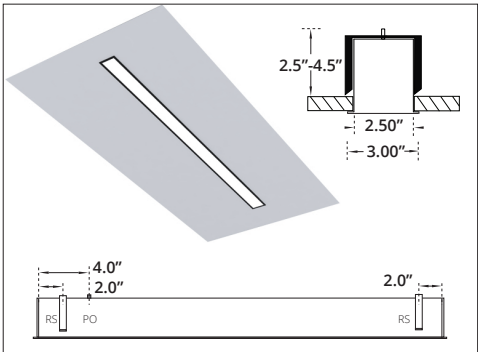


RECESSED

RS - Recessed Bracket
PO - Power Opening
*Cutout Dimensions = Total Length x Width of Extrusion.

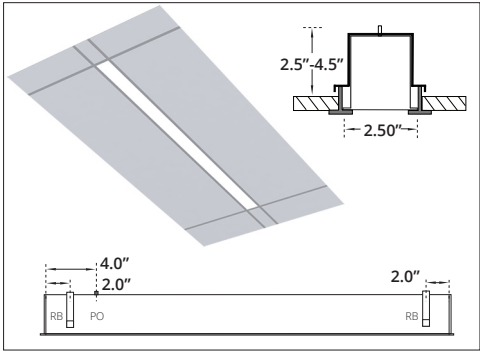


RECESSED T-BAR

RB - Recessed T-BAR Bracket
PO - Power Opening

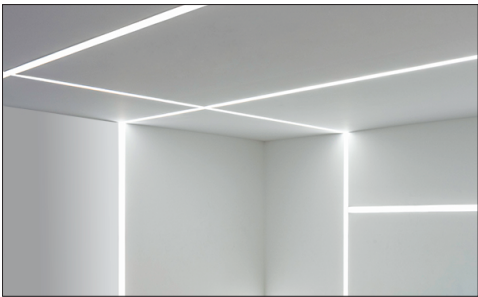

90° IN (WALL TO CEILING)

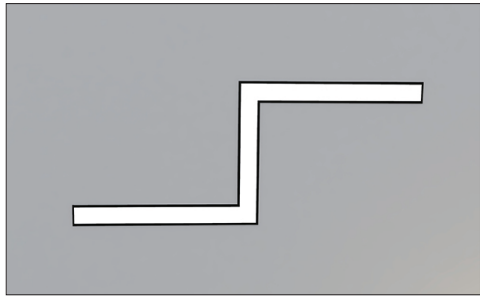

VARIABLE ANGLE
60°, 90°, 120°, 135° or Custom.