

## FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**ED HEXAGON+**  —  —  —  —  —  —  —  —  —  —

Enter the Product Code into the boxes above.

### SIZE

Feet\*  
\*1-8 Feet Arm length.

### SOURCE

- ☐ 5W/Ft LED
- ☐ 7W/Ft LED
- ☐ 10W/Ft LED

### RADIANCE

☐ DD - Direct (100%Down)  
\*Light Distribution.

### VOLTAGE

- ☐ 120V
  - ☐ 277V
  - ☐ 347V\*
- \*Not available for all configurations.

### DRIVER

- ☐ ST - On/Off
  - ☐ DL - 0-10V Dimming (1%)
  - ☐ DLO - 0-10V Dimming (to Off)
  - ☐ DL2 - 0-10V Dimming (2 Channels)
  - ☐ DA4 - DALI D4i
  - ☐ DMX - DMX RGBW
  - ☐ \*
- \*Specify dimming protocol.

### MOUNTING

- ☐ S6W - 6Ft Cord WH\*
  - ☐ S6B - 6Ft Cord BK\*
  - ☐ S  Feet\*\*
  - ☐ WF - Wall Flush
  - ☐ SF - Surface Mount
  - ☐ RT - Recessed Trimless
- \*Canopy will match the Cord color.  
\*\*Specify Suspension length and color.

### LENS

- ☐ OP - Opal
- ☐ PR - Prismatic

### FINISH

- ☐ BK - Black\*
  - ☐ WH - White\*\*
  - ☐ CF/RAL \*\*\*
- \*RAL 9005  
\*\*RAL 9016  
\*\*\*Specify required RAL number.

### CCT

- ☐ 30K/90CRI - 3000 Kelvin
  - ☐ 35K/90CRI - 3500 Kelvin
  - ☐ 40K/90CRI - 4000 Kelvin
  - ☐ RGBW
  - ☐ TW - Tunable White\*  
(2700K-6500K)
  - ☐ \*\*
- \*Available with 0-10V, Dali or Bluetooth controls.  
\*\*Specify required CCT.

### OPTIONS

- ☐ No Options\*
  - ☐ DR - Damp Rated
  - ☐ CB - Casambi/Bluetooth
  - ☐ \*\*
- \*Leave empty.  
\*\*Specify required option.

## LUMEN OUTPUT W/Ft:


Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm



Project:

Type:

SIZE:

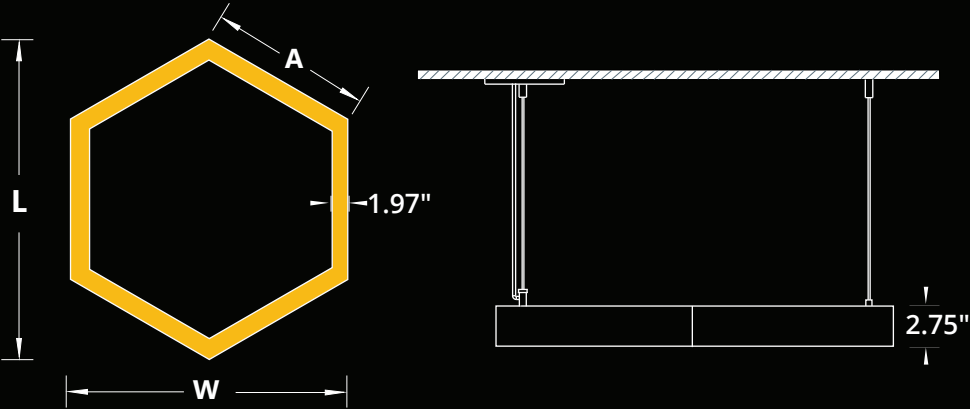


Size	A	L x W
1 Feet	12.84	25.67 x 22.23
2 Feet	25.60	51.17 x 31.76
3 Feet	35.60	73.17 x 63.37
4 Feet	49.34	98.67 x 85.45
5 Feet	60.34	120.67 x 104.51
6 Feet	73.10	146.17 x 126.59
7 Feet	84.10	168.17 x 145.64
8 Feet	96.84	193.67 x 167.73

A - Arm Length  
L - Total Length  
W - Total Width  
\*All dimensions are in Inches.


RADIANCE:




MOUNTING:

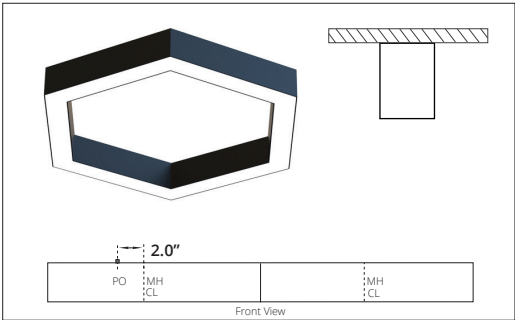


**SURFACE MOUNT**  
MH - Mounting Hole  
PO - Power Opening  
CL - Center of Arm length

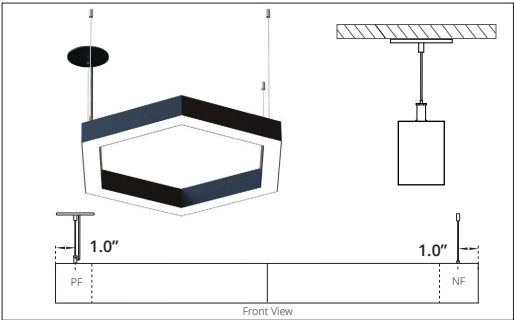

**SUSPENDED**  
PF - Power Feed  
NF - Non Power Feed

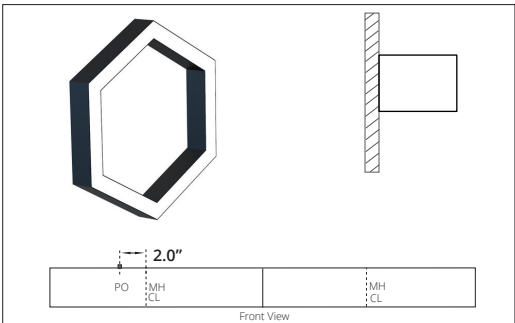

**WALL FLUSH**  
MH - Mounting Hole  
PO - Power Opening

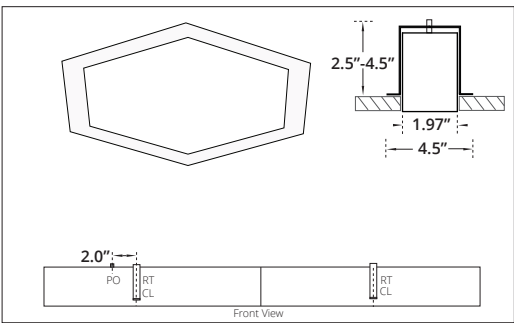

**RECESSED TRIMLESS**  
RT - Recessed Trimless Bracket  
PO - Power Opening  
CL - Center of Arm length  
\*Cutout Dimensions = Total Length x Width of Extrusion.