


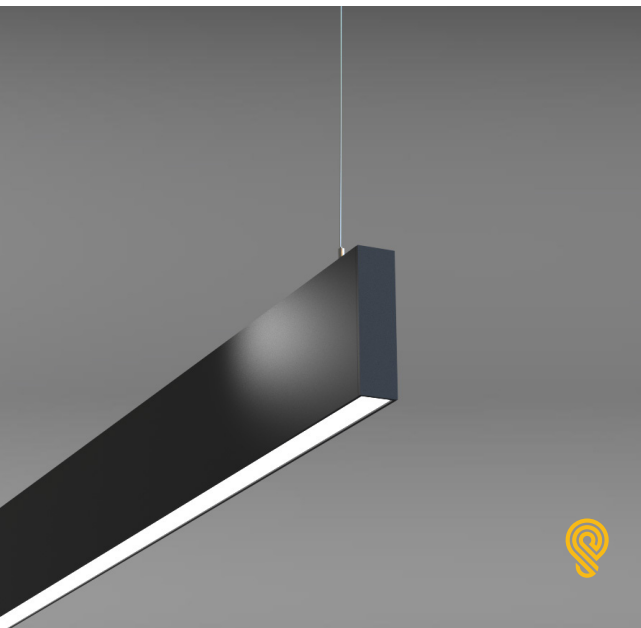

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board.
- ✓ Downlight illumination is provided by range of precision optical lenses.
- ✓ Up-light comes equipped with batwing lens for better ceiling coverage.
- ✓ Ultra-Slim aluminum body contain integrated driver.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for suspended and wall mount installations.
- ✓ LED Strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED BLADE+ — — — — — — — —

Enter the Product Code into the boxes above.

SIZE

_____ ft
 2,4,6,8ft
 Continuous Run
 (2ft increment)

SOURCE

- ☐ 7W/ft
- ☐ 10W/ft
- ☐ 12W/ft

RADIANCE

- ☐ DD - Direct¹
- ☐ UD - Uneven²
- ☐ DI - Direct/Indirect³

1. 100% Down
 2. 70% Down/30%Up
 3. 50% Down/50%Up

VOLTAGE

- ☐ UNV - 120/277V
- ☐ 347V¹

1. Verify availability.

DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dim (1%)
- ☐ DLO - 0-10V Dim (to Off)
- ☐ DA - DALI
- ☐

Specify dimming protocol.

MOUNTING

- ☐ S6B - 6ft Cord BK ¹
- ☐ S6W - 6ft Cord WH ¹
- ☐ S feet ²
- ☐ WM - Wall Mount

1. Canopy match the Cord color.
 2. Specify Suspension length/color.

LENS

- ☐ OP- Opal
- ☐ BF - Flood 60°
- ☐ BM - Medium 30°

Indirect Batwing Only.

FINISH

- ☐ BK - Black¹
- ☐ WH - White²

1. RAL 9004
 2. RAL 9016
 Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
- ☐ 35K - 3500 Kelvin/90CRI
- ☐ 40K - 4000 Kelvin/90CRI
- ☐

Specify required CCT.

LUMEN OUTPUT W/ft:


Watts	30K	35K	40K
7W	820lm	840lm	860lm
10W	1170lm	1200lm	1230lm
12W	1410lm	1440lm	1470lm



Project:

Type:


SIZE:

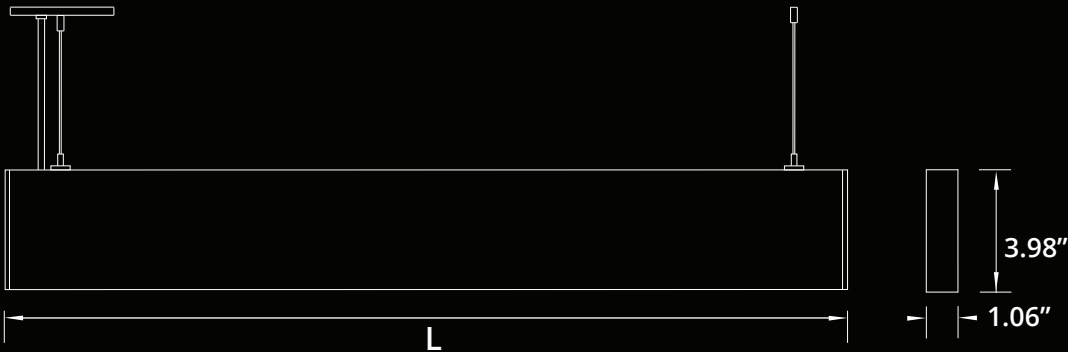


✓	Size	L
☐	2ft	23.86in
☐	4ft	47.48 in
☐	6ft	71.34 in
☐	8ft	94.72 in

L - Total length with Endcaps


BEAM:



☐ Opal




☐ Flood - 60°




☐ Spot - 30°

RADIANCE:




☐ Uneven




☐ Direct/Indirect

MOUNTING:

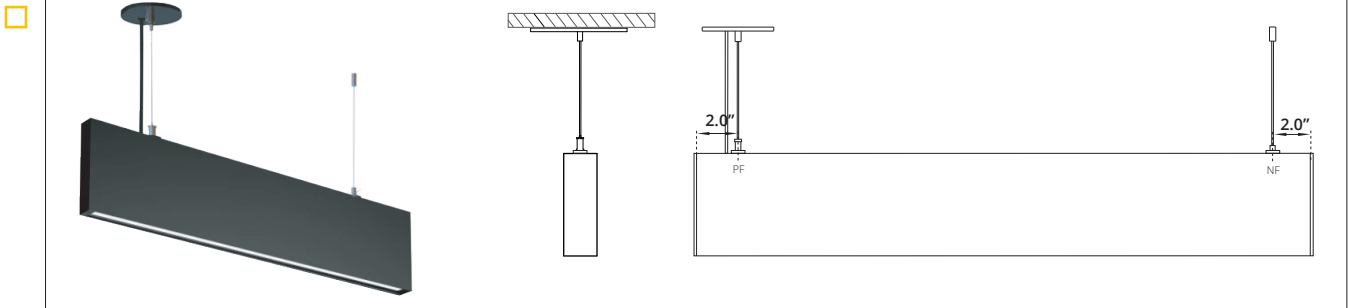

SUSPENDED
PF - Power Feed
NF - Non Power Feed

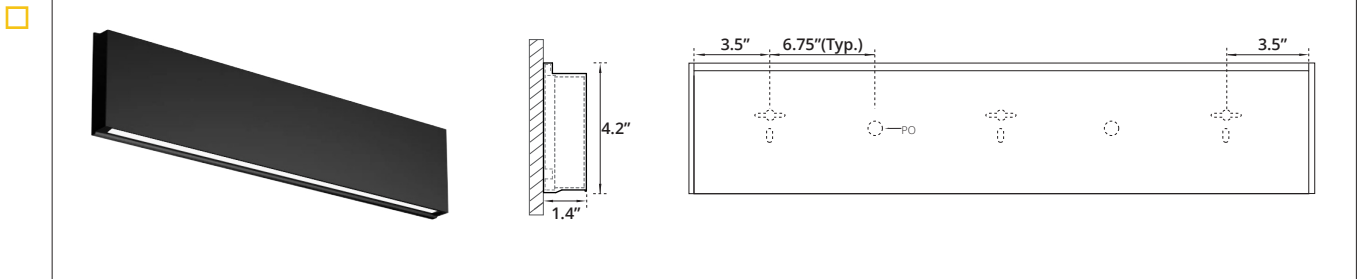

WALL MOUNT
PO - Power Opening
WM - Wall Mount Plate