


FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provide excellent lighting distribution.
- ✓ Square internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ Suitable for surface mounted and suspended installations.
- ✓ LED Spot is rated for 60,000hrs. L70 with 90CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:



Enter the Product Code into the boxes above.

SOURCE

- 15W LED
- 20W LED
- 25W LED

RADIANCE

- DD - Direct (100%Down)
*Light Distribution.

VOLTAGE

- 120V
 - 277V
 - 347V*
- * External step down transformer per luminaire.

DRIVER

- ST - Standard (Non-Dimming)
 - DL - 0-10V Dimming (1%)
 - DA - DALI
 - BT - Bluetooth
 - *
- *Please specify dimming method.

MOUNTING

- SF - Surface Mount
 - S4 - Suspension 4Feet
 - S6 - Suspension 6Feet
 - S Feet*
 - R2 - Stem 2Feet
 - R3 - Stem 3Feet
 - R Feet*
- * Please specify required Length.

LOUVER

- WH - White
- BK - Black
- SL - Silver

FINISH

- WH - White
 - BK - Black
 - GR - Grey*
- *Supply with White Cord & Canopy

CCT


- 30K/90CRI - 3000Kelvin
 - 35K/90CRI - 3500Kelvin
 - 40K/90CRI - 4000Kelvin
- *Other options are available.

DIMENSIONS:

Width	Height
4.5"	6.0"

LUMEN OUTPUT:

Watts	30K	35K	40K
15W	1400 lm	1430 lm	1460 lm
20W	1910 lm	1950 lm	1990 lm
25W	2350 lm	2400 lm	2450 lm

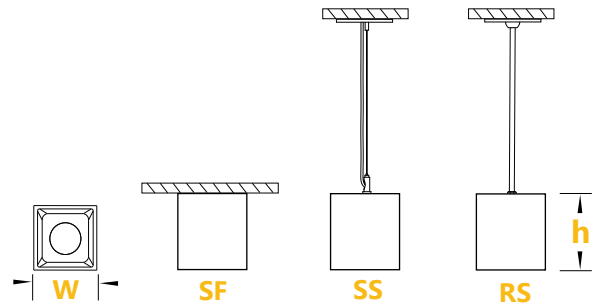

Project:

Type: