

FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED RECTANGLE+ SIZE SOURCE RADIANCE VOLTAGE DRIVER MOUNTING LENS FINISH CCT OPTIONS

Enter the order code into the boxes above.

SIZE

Feet*

*1-8 Feet Arm length.

SOURCE

- ☐ 5W/Ft LED
- ☐ 7W/Ft LED
- ☐ 10W/Ft LED

RADIANCE

- DD - Direct (100%Down)
*Light distribution.

VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V*

*Not available for all configurations.

DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dimming (1%)
- ☐ DLO - 0-10V Dimming (to Off)
- ☐ DL2 - 0-10V Dimming (2 Channels)
- ☐ DA4 - DALI D4i
- ☐ DMX - DMX RGBW
- ☐ *

*Specify dimming protocol.

MOUNTING

- ☐ S6W - 6Ft Cord WH*
- ☐ S6B - 6Ft Cord BK*
- ☐ S Feet**
- ☐ WF - Wall Flush
- ☐ SF - Surface Mount
- ☐ RT - Recessed Trimle

*Canopy will match the Cord color.
**Specify Suspension length and color.

LENS

- ☐ OP - Opal
☐ PR - Prismatic

FINISH

- ☐ BK - Black*
☐ WH - White**
☐ CF/RAL ***
- *RAL 9005
 **RAL 9016
 ***Specify required RAL number

CCT

- ☐ 30K/90CRI - 3000 Kelvin
- ☐ 35K/90CRI - 3500 Kelvin
- ☐ 40K/90CRI - 4000 Kelvin
- ☐ RGBW
- ☐ TW - Tunable White*
(2700K-6500K)
- ☐ **

*Available with 0-10V, Dali or Bluetooth controls.
**Specify required CCT.

OPTIONS

- ☐ No Options*
- ☐ DR - Damp Rated
- ☐ CB - Casambi/Bluetooth
- ☐ **

*Leave empty.
**Specify required option.

LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm



Declare.

Project:

Type:

SIZE:




Size	A x B
1 Foot	13.67
2 Foot	26.42
3 Foot	37.42
4 Foot	50.20
5 Foot	61.20
6 Foot	73.92
7 Foot	84.92
8 Foot	97.67

A - Arm Length
 *All dimensions are in Inches.


RADIANCE:




MOUNTING:

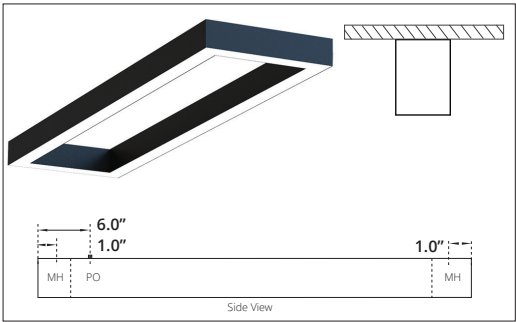


SURFACE MOUNT
 MH - Mounting Hole
 PO - Power Opening

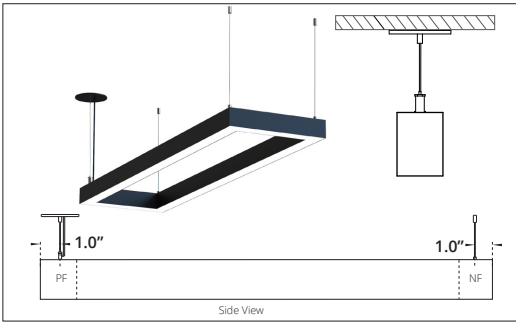

SUSPENDED
 PF - Power Feed
 NF - Non Power Feed

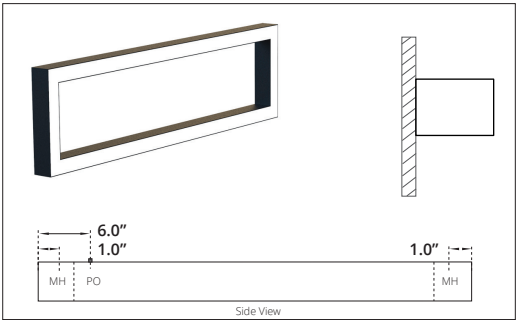

WALL FLUSH
 MH - Mounting Hole
 PO - Power Opening

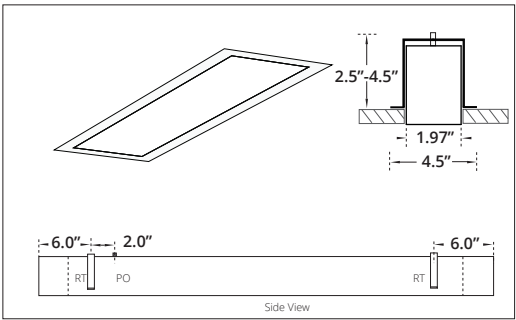

RECESSED TRIMLESS
 RT - Recessed Trimless Bracket
 PO - Power Opening
 *Cutout Dimensions = Total Length x Width of Extrusion.