


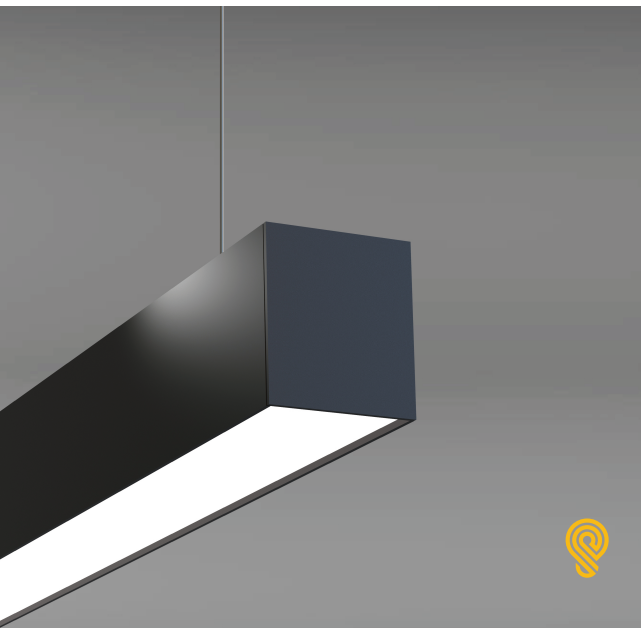

## FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by high efficiency opal lenses.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for surface, suspended, recessed or wall mounted installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**ED VECTOR2+**  —  —  —  —  —  —  —  —  —  —

Enter the Product Code into the boxes above.

### SIZE

\_\_\_\_\_ Ft\*  
 \*1-8 Ft  
 Continuous Run  
 (0.5 Ft Increments)

### SOURCE

- ☐ 5 W/Ft  
☐ 7 W/Ft  
☐ 10 W/Ft

### RADIANCE

- ☐ DD - Direct (100%Down)  
☐ UD - Uneven (70%Down/30%Up)\*\*  
 \*Light distribution.  
 \*\*Not available for sizes shorter than 4 Ft.

### VOLTAGE

- ☐ UNV - 120/277V  
☐ 347V\*  
 \*Not available for all configurations.

### DRIVER

- ☐ ST - On/Off  
☐ DL - 0-10V Dim (1%)  
☐ DLO - 0-10V Dim (to Off)  
☐ DL2 - 0-10V Dim (TW)  
☐ DLA - 0-10V Dim (Aux)  
☐ DA4 - DALI D4i  
☐ CV - Constant Voltage (RGBW)  
☐  \*  
 \*Specify dimming protocol.

### MOUNTING

- ☐ S6B - 6Ft Cord BK\*  
☐ S6W - 6Ft Cord WH\*  
☐ S  Ft\*\*  
☐ WM - Wall Mount  
☐ WF - Wall Flush  
☐ SF - Surface Mount  
☐ RT - Recessed Trimless

\*Canopy will match the Cord color.  
 \*\*Specify Suspension length and color.

### LENS

- ☐ OP - Opal  
☐ OR - Opal Regressed

### FINISH

- ☐ BK - Black\*  
☐ WH - White\*\*  
☐ CF/RAL  \*\*\*  
 \*RAL 9005  
 \*\*RAL 9016  
 \*\*\*Specify required RAL number.

### CCT

- ☐ 30K - 3000 Kelvin/90CRI  
☐ 35K - 3500 Kelvin/90CRI  
☐ 40K - 4000 Kelvin/90CRI  
☐ RGBW\*  
☐ TW - Tunable White (27K-65K) \*\*  
☐  \*\*\*  
 \* Available with CV & DMX.  
 \*\*Available with DL2, DA4.  
 \*\*\*Specify required CCT.

### OPTIONS

- ☐ No Options\*  
☐ EM - Emergency Battery Pack\*\*  
☐ DC - Dual Circuit\*\*\*  
☐ EC - Emergency Circuit  
☐ DR - Damp Rated  
☐ CB - Casambi Bluetooth(TW, RGBW)  
☐ DMX - DMX (RGBW)  
☐ JD - JDRF Autonomy Sensor (DA4)  
☐ DOS - Daylight & Occupancy Sensor (DLA)  
☐ AWN - Athena Wireless Node (DLA)  
 \*Leave empty.  
 \*\*Battery Pack per 4 Ft section.  
 \*\*\*Control Downlight/Uplight separately.

## LUMEN OUTPUT W/Ft:

| Watts | 30K    | 35K     | 40K     |
|-------|--------|---------|---------|
| 5W    | 515 lm | 525 lm  | 535 lm  |
| 7W    | 720 lm | 735 lm  | 750 lm  |
| 10W   | 1030lm | 1050 lm | 1080 lm |




Declare.

Project:

Type:

### SIZE:

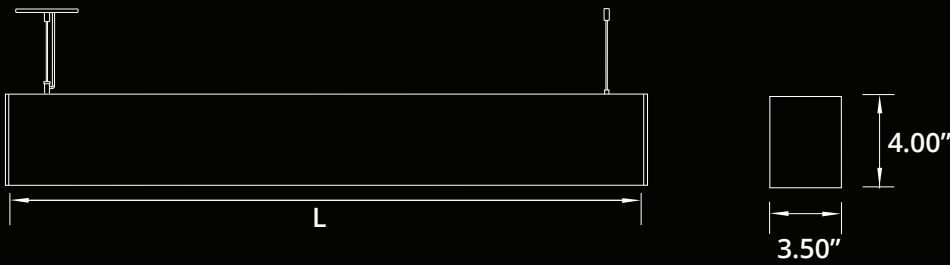


| Size | L (Extrusion Length) |
|------|----------------------|
| 1 Ft | 11.50 In             |
| 2 Ft | 24.25 In             |
| 3 Ft | 35.25 In             |
| 4 Ft | 48.00 In             |
| 5 Ft | 59.00 In             |
| 6 Ft | 71.75 In             |
| 7 Ft | 82.75 In             |
| 8 Ft | 95.50 In             |

Total length with endcaps = L + 0.22"


### CONTINUOUS RUN:



### RADIANCE:




Direct Distribution




Uneven Distribution

### MOUNTING:

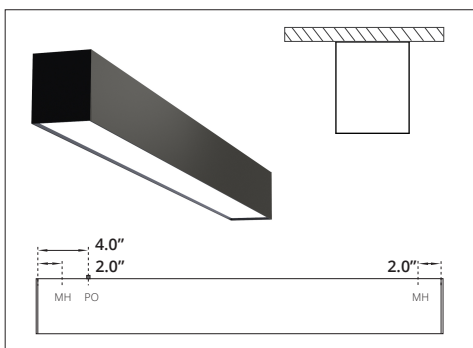


#### SURFACE MOUNT

MH - Mounting Hole  
PO - Power Opening

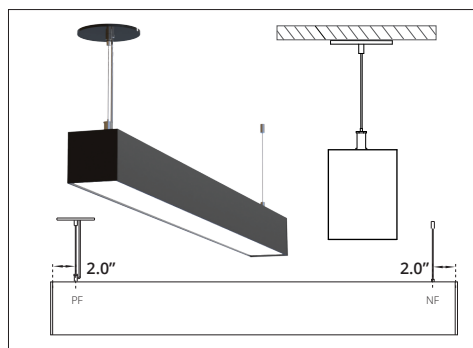


#### SUSPENDED

PF - Power Feed  
NF - Non Power Feed

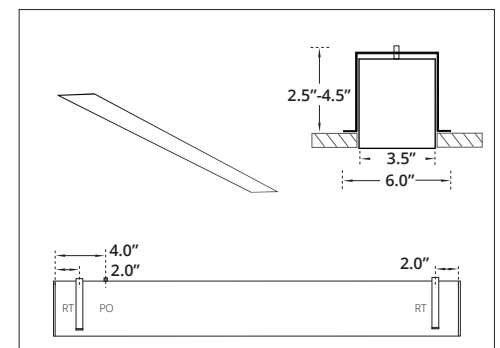


#### RECESSED TRIMLESS

RT - Recessed Trimless Bracket  
PO - Power Opening  
\*Cutout Dimensions = Total Length x Width of Extrusion.

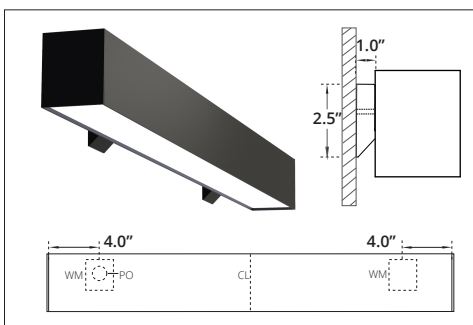


#### WALL MOUNT

PO - Power Opening  
WM - Wall Mount Bracket  
\*1-3 Ft, single Wall Mount Bracket with Power Opening in the centre.

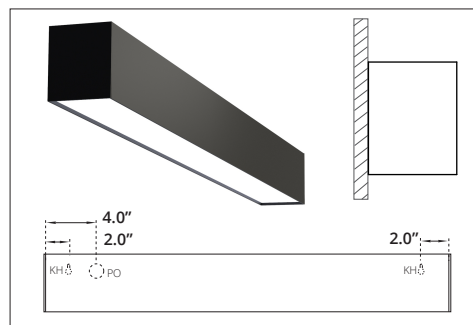

#### WALL FLUSH

KH - Key Hole  
PO - Power Opening

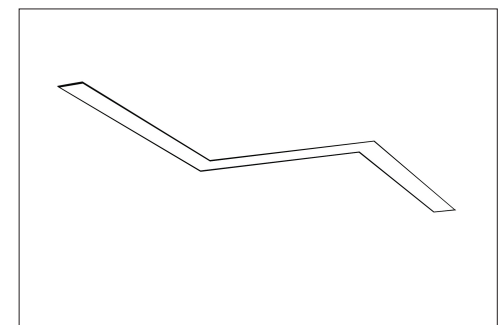

#### VARIABLE ANGLE

60°, 90°, 120°, 135° or Custom.