


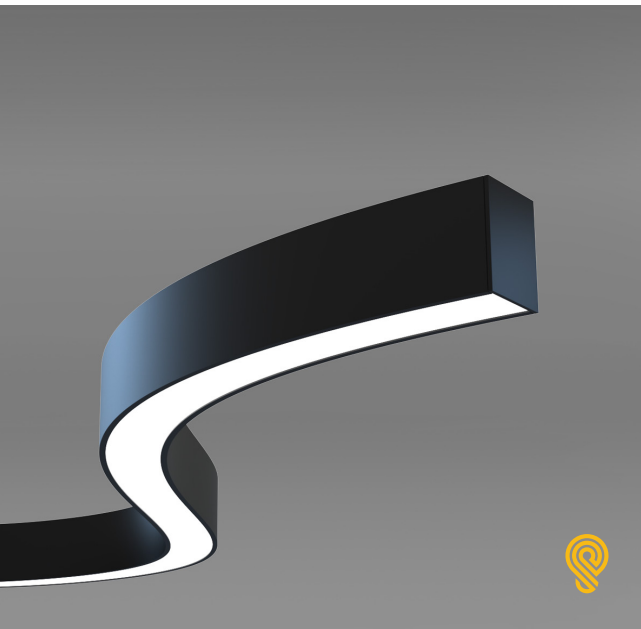

FEATURES:

- ✓ Architectural curved system with direct or direct/indirect distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a high efficiency frosted opal lens or by an optional prismatic optic.
- ✓ Sleek body of the luminaire is made from an aluminum profile curved to desire shape.
- ✓ Suitable for suspended or surface mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Available with custom color options or unique shape configurations.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED CURVES+

SHAPE	SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS

Enter the Product Code into the boxes above.

SHAPE

- ☐ CR - Curve
- ☐ OV - Oval
- ☐ SQ - Square
- ☐ RC - Rectangle
- ☐ CS - Custom Shape

Specify Custom Shape.

SIZE

- ☐ _____ Linear ft

Provide drawing (pdf or dwg).

SOURCE

- ☐ 5 W/ft
- ☐ 7 W/ft
- ☐ 10 W/ft

RADIANCE

- ☐ DD - Direct
- ☐ UD - Uneven¹

1. Suspended Configuration only.

VOLTAGE

- ☐ UNV - 120/277V
- ☐ 347V¹

1. Verify availability.

DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dim (1%)
- ☐ DLO - 0-10V Dim (to Off)
- ☐ DL2 - 0-10V Dim (TW)
- ☐ DLA - 0-10V Dim (Aux)
- ☐ DA4 - DALI D4i (TW)
- ☐ CV - Constant Voltage (RGBW)
- ☐

Specify dimming protocol.

MOUNTING

- ☐ S6B - 6ft Cord BK¹
- ☐ S6W - 6ft Cord WH¹
- ☐ S Feet²
- ☐ SF - Surface Mount

1. Canopy match the Cord color.
2. Specify Suspension length/color.

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black¹
- ☐ WH - White²
- ☐ CF/RAL

1. RAL 9005
2. RAL 9003
Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
- ☐ 35K - 3500 Kelvin/90CRI
- ☐ 40K - 4000 Kelvin/90CRI
- ☐ RGBW¹
- ☐ TW - Tunable White (27K-65K)²
- ☐

1. Available with DMX or CB.
2. Available with DL2, DA4 or CB.
Specify required CCT.

OPTIONS

- ☐ No Options¹
- ☐ DC - Dual Circuit²
- ☐ EC - Emergency Circuit
- ☐ CB - Casambi Bluetooth(TW, RGBW)
- ☐ DMX - DMX (RGBW)
- ☐ AWN - Athena Wireless Node (DLA)

1. Leave empty.
2. Control Downlight/Uplight separately.

LUMEN OUTPUT W/ft:


Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm




Project:

Type:



SIZE:

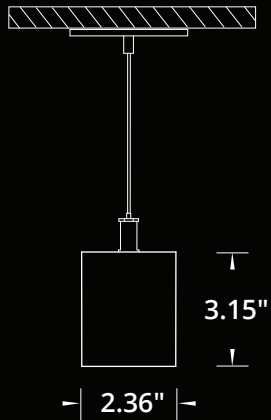


MINIMUM RADIUS:




RADIANCE:



SHAPES:

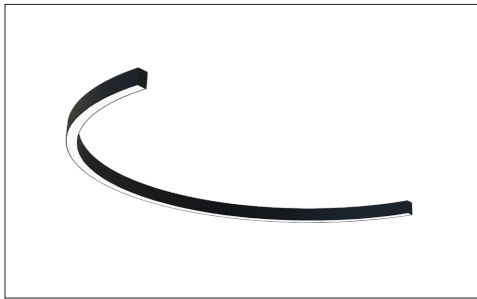


CURVE

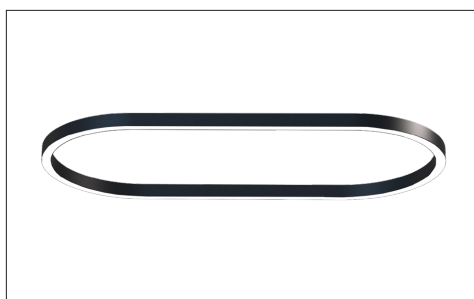

OVAL



SQUARE

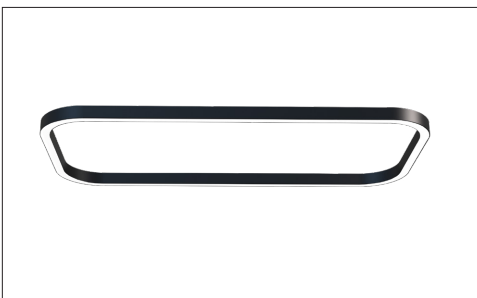

RECTANGLE



CUSTOM SHAPE



CUSTOM SHAPE