

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Even illumination is provided by variety of high efficiency optic lenses.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface, suspended and recessed trimless installations.
- ✓ Extruded aluminum body comes with black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED VECTOR1+ — — — — — — — — — —

Enter the Product Code into the boxes above.

SIZE

_____ Feet

SOURCE

- 5W/Ft LED
- 7W/Ft LED
- 10W/Ft LED

RADIANCE

- DD - Direct (100%Down)
 - UD - Uneven(70%Down/30%Up)**
- *Light Distribution.
**Suspended Configuration only.

VOLTAGE

- 120V
 - 277V
 - 347V*
- *Not available for all configurations.

DRIVER

- ST - Standard (Non-Dimming)
 - DL - 0-10V Dimming (1%)
 - DA - DALI
 - BT - Bluetooth
 - *
 - EC - Emergency Circuit
 - EM - Emergency**
- * Please specify dimming method.
**Battery Pack per 4Feet section.

MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S Feet*
- WM - Wall Mount
- WF - Wall Flush
- SF - Surface Mount
- RT - Recessed Trimless

LENS

- OP - Opal
- WW - Wall Wash
- PR - Prismatic

FINISH

- BK - Black
- WH - White
- CF - Custom

CCT

- 30K/90CRI - 3000Kelvin
 - 35K/90CRI - 3500Kelvin
 - 40K/90CRI - 4000Kelvin
 - RGBW*
 - TW - Tunable White**
(2700K-6500K)
- *Available with Dali, DMX or Bluetooth controls.
**Available with 0-10V,Dali or Bluetooth controls.

OPTIONS

- No Options*
 - DR - Damp Rated
 - DC - Dual Circuit**
 - DOS - Daylight & Occupancy Sensor
- *Leave Empty.
**Down /Up Control separately.
***Combination example (DR/DC).

*Please specify required Length.

LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm



Project:

Type:

SIZE:



Size	L (LENGTH)
1 Foot	11.75 Inch
2 Feet	24.50 Inch
3 Feet	35.50 Inch
4 Feet	48.25 Inch
5 Feet	59.25 Inch
6 Feet	72.00 Inch
7 Feet	83.00 Inch
8 Feet	95.75 Inch

RADIANCE:


DIRECT DISTRIBUTION




UNEVEN DISTRIBUTION




MOUNTING:

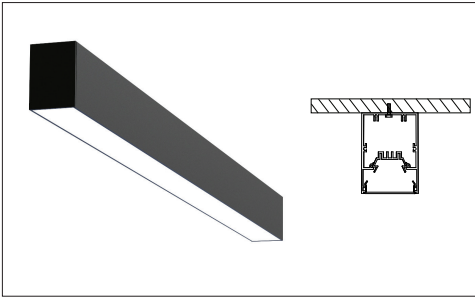


SURFACE MOUNT

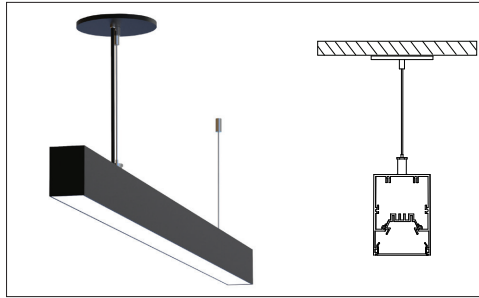


SUSPENDED

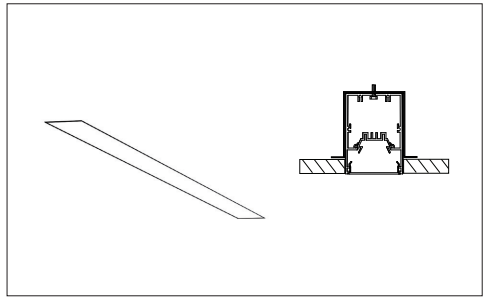


RECESSED TRIMLESS

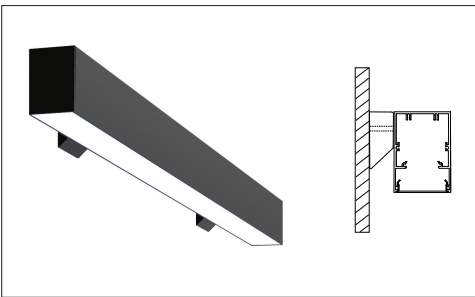

WALL MOUNT

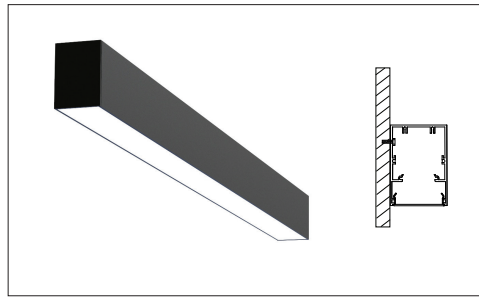

WALL FLUSH

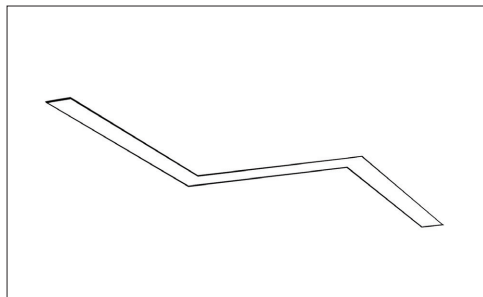

90° LEFT/90° RIGHT