

FEATURES:

- ✓ Architectural sound-absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 fire-rated with 0.7 Noise Reduction Coefficient for 1" acoustic.
- ✓ Light source: COB LED.
- ✓ A high-efficiency integral louver combined with an opal lens insert provides excellent lighting distribution.
- ✓ A circular internal louver is available in a black or white finish.
- ✓ The aluminum body of the luminaire comes with a built-in driver.
- ✓ The LED spot is rated for 60,000 hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial, and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

Sonic TUBE+

TYPE	HEIGHT	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LOUVER	TUBE FINISH	CCT	ACOUSTIC

Enter the Product Code into the boxes above.

TYPE

☐ LS - Layered Shade

HEIGHT

☐ 12 in
☐ 16 in

SOURCE

☐ 15 W
☐ 20 W
☐ 25 W

RADIANCE

☐ DD - Direct

VOLTAGE

☐ UNV - 120/277V

DRIVER

☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DA4 - DALI D4i
☐
 Specify dimming protocol.

MOUNTING

☐ S6B - 6 ft Cord BK¹
☐ S6W - 6 ft Cord WH¹
☐ S ft²

1. Canopy match the Cord color
 2. Specify Suspension length and color.

LOUVER

☐ LB - Black
☐ LW - White

ED TUBE+ FINISH

☐ BK - Black¹
☐ WH - White²
 1. RAL 9005
 2. RAL 9003

CCT

☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐
 Specify required CCT.

ACOUSTIC FINISH

Specify Acoustic Finish, for example (04)



LUMEN OUTPUT:


Watts	30K	35K	40K
15 W	1400 lm	1430 lm	1460 lm
20 W	1910 lm	1950 lm	1990 lm
25 W	2350 lm	2400 lm	2450 lm


Declare.

Project:

Type:

SIZE:

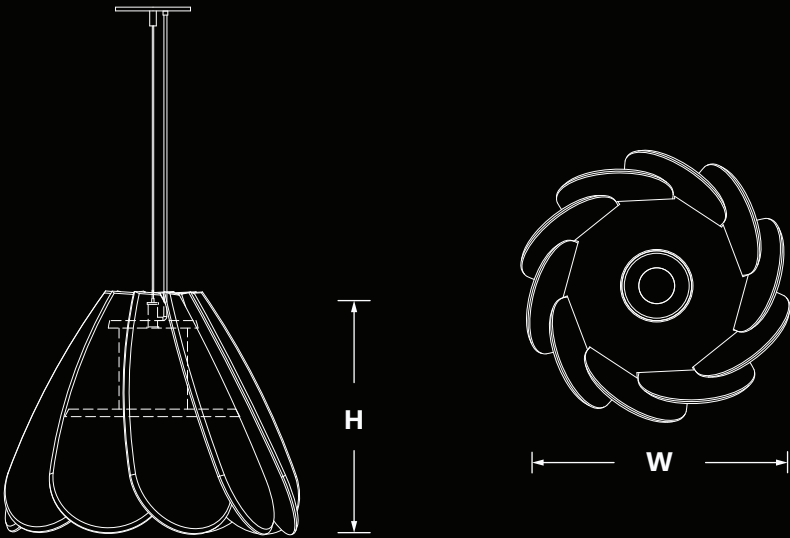

H - Height	Diameter
12 in = 11.75 in	16.00 in
16 in = 15.75 in	20.00 in

FINISHES:

