

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface, suspended, recessed or wall mounted installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED sources are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED VECTOR+

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

SIZE

 _____ Ft*
 *1-8 Ft
 Continuous Run
 (0.5 Ft Increments)

SOURCE

- ☐ 5 W/Ft
☐ 7 W/Ft
☐ 10 W/Ft

RADIANCE

- ☐ DD - Direct (100%Down)
☐ ID - Indirect (100%Up)
☐ UD - Uneven (70%Down/30%Up)**

*Light distribution.
 **Not available for sizes shorter than 4 Ft.

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V*
 *Not available for all configurations.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ DLA - 0-10V Dim (Aux)
☐ DA4 - DALI D4i
☐ BT - Bluetooth (Dim, TW, RGBW)
☐ DMX - DMX (RGBW)
☐ *

*Specify dimming protocol.

MOUNTING

- ☐ S6B - 6Ft Cord BK*
☐ S6W - 6Ft Cord WH*
☐ S Ft**
☐ WM - Wall Mount
☐ WF - Wall Flush
☐ SF - Surface Mount
☐ RT - Recessed Trimless

*Canopy will match the Cord color.
 **Specify Suspension length and color.

LENS

- ☐ OP - Opal
☐ AS - Asymmetric
☐ PR - Prismatic

FINISH

- ☐ BK - Black*
☐ WH - White**
☐ CF/RAL ***
 *RAL 9005
 **RAL 9016
 ***Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW*
☐ TW - Tunable White (27K-65K) **
☐ ***

* Available with BT or DMX.
 **Available with DL2, DA4 or BT.
 ***Specify required CCT.

OPTIONS

- ☐ No Options*
☐ EM - Emergency Battery Pack**
☐ DC - Dual Circuit***
☐ DR - Damp Rated
☐ CB - Casambi/BT
☐ JD - JDRF Autonomy Sensor/DA4
☐ DOS - Daylight & Occupancy Sensor/DLA

*Leave empty.
 **Battery Pack per 4 Ft section.
 ***Control Downlight/Uplight separately.

LUMEN OUTPUT W/Ft:


Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm



Project:

Type:

SIZE:

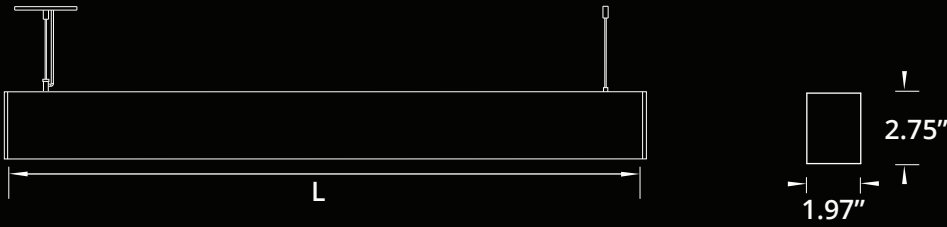




Size	L (Extrusion Length)
1 Ft	11.50 In
2 Ft	24.25 In
3 Ft	35.25 In
4 Ft	48.00 In
5 Ft	59.00 In
6 Ft	71.75 In
7 Ft	82.75 In
8 Ft	95.50 In

Total length with endcaps = L + 0.22"


CONTINUOUS RUN:




RADIANCE:




MOUNTING:

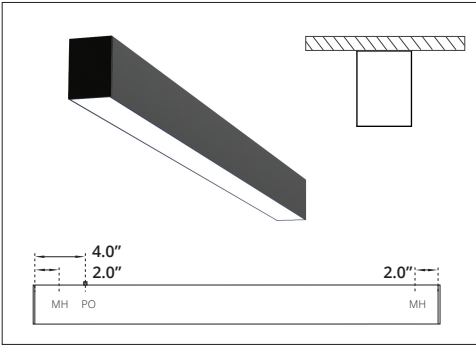


SURFACE MOUNT
MH - Mounting Hole
PO - Power Opening

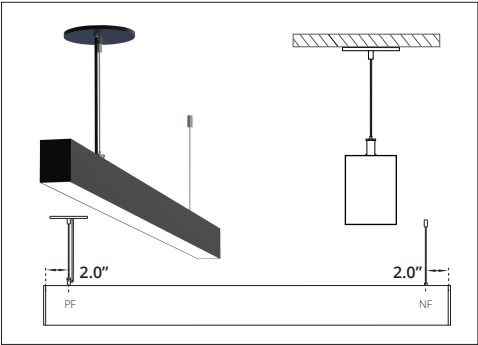


SUSPENDED
PF - Power Feed
NF - Non Power Feed

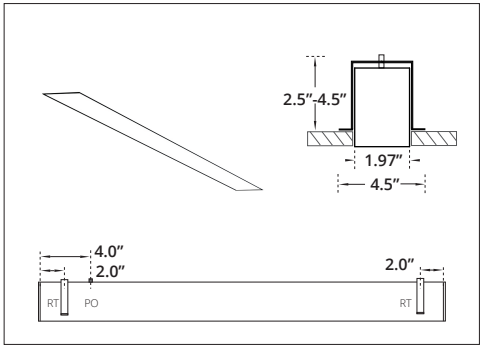


RECESSED TRIMLESS
RT - Recessed Trimless Bracket
PO - Power Opening
*Cutout Dimensions = Total Length x Width of Extrusion.

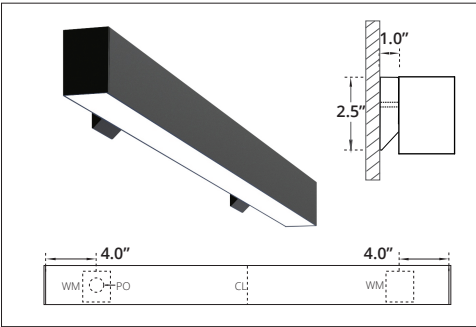

WALL MOUNT
PO - Power Opening
WM - Wall Mount Bracket
*1-3 Ft, single Wall Mount Bracket with Power Opening in the centre.

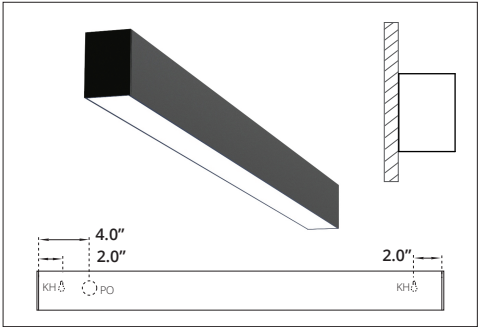

WALL FLUSH
KH - Key Hole
PO - Power Opening

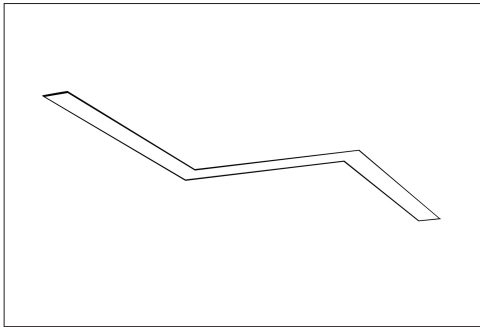

VARIABLE ANGLE
60°, 90°, 120°, 135° or Custom.