

FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED VERTEX+ - - - - - - - - - - -

Enter the Product Code into the boxes above.

ANGLE

- ☐ 60°
☐ 90°
☐ 120°

SIZE

- ☐ Ft*
 *1-8 Ft Arm length.

SOURCE

- ☐ 5W/Ft
☐ 7W/Ft
☐ 10W/Ft

RADIANCE

- ☐ DD - Direct (100%Down)
 *Light Distribution.

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V*
 *Not available for all configurations.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ DA4 - DALI D4i
☐ DMX - DMX RGBW
☐ *
 *Specify dimming protocol.
 **Remote driver only.

MOUNTING

- ☐ S6B - 6Ft Cord BK*
☐ S6W - 6Ft Cord WH*
☐ S Ft**
☐ WM - Wall Mount
☐ WF - Wall Flush
☐ SF - Surface Mount
☐ RT - Recessed Trimless

*Canopy will match the Cord color.
 **Specify Suspension length and color.

LENS

- ☐ OP - Opal
☐ PR - Prismatic

FINISH

- ☐ BK - Black*
☐ WH - White**
☐ CF/RAL ***
 *RAL 9005
 **RAL 9016
 ***Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW
☐ TW - Tunable White*
 (2700K-6500K)
☐ **
 *Available with 0-10V, Dali or Bluetooth controls.
 **Specify required CCT.

OPTIONS

- ☐ No Options*
☐ DR - Damp Rated
☐ CB - Casambi/Bluetooth
☐ **
 *Leave empty.
 **Specify required option.

LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm





Declare.

Project:

Type:


SIZE:

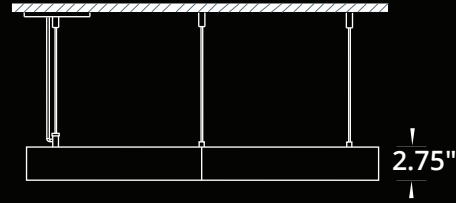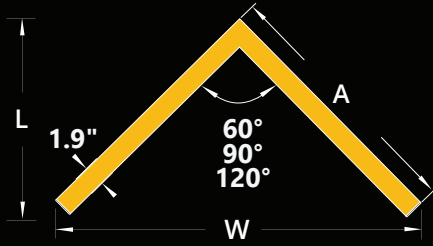


60°			90°		120°	
Size	A	L x W	A	L x W	A	L x W
1 Ft	13.36	12.55 x 13.36	12.63	10.33 x 13.36	12.22	7.81 x 21.16
2 Ft	26.11	23.60 x 26.10	25.38	23.23 x 43.68	24.96	14.19 x 43.25
3 Ft	37.11	33.12 x 37.10	36.88	27.12 x 51.46	35.96	19.69 x 62.30
4 Ft	49.86	44.16 x 49.85	49.13	36.14 x 69.49	48.72	26.06 x 84.38
5 Ft	60.86	53.68 x 60.85	60.13	43.91 x 85.04	59.72	31.56 x 103.44
6 Ft	73.61	64.73 x 73.60	72.83	52.93 x 103.10	72.46	37.94 x 125.52
7 Ft	84.61	74.25 x 84.60	83.88	60.71 x 118.63	83.46	43.44 x 144.57
8 Ft	97.36	85.30 x 97.35	96.63	69.72 x 136.66	96.22	49.81 x 166.65

A - Arm Length
L - Total Length
W - Total Width
*All dimensions are in Inches.

RADIANCE:




MOUNTING:

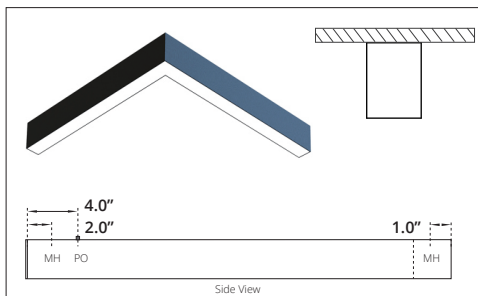


SURFACE MOUNT

MH - Mounting Hole
PO - Power Opening

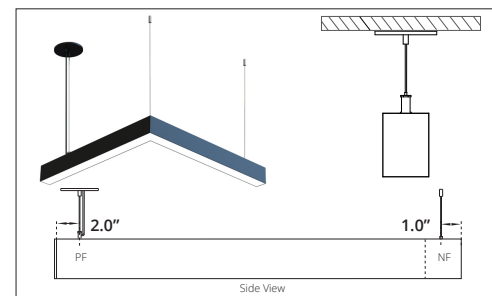


SUSPENDED

PF - Power Feed
NF - Non Power Feed

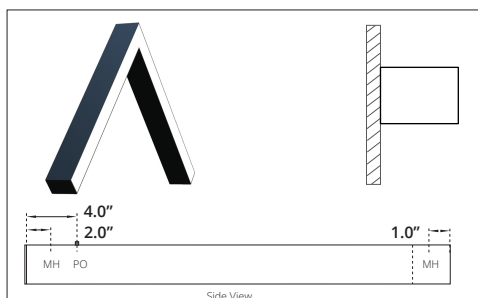

WALL FLUSH

MH - Mounting Hole
PO - Power Opening

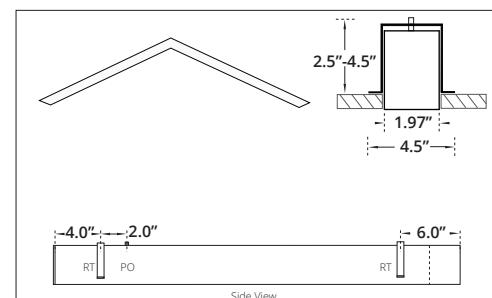

RECESSED TRIMLESS

RT - Recessed Trimless Bracket
PO - Power Opening
*Cutout Dimensions = Total Length x Width of Extrusion.