



## FEATURES:

- ✓ Architectural luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines aluminum body with high efficiency opal lens.
- ✓ Suitable for surface, suspended and wall mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LED Strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

**reinventlight**

## SPECIFICATION:

### ED DRUM+

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

### SIZE

- ☐ 2 Ft
- ☐ 3 Ft
- ☐ 4 Ft

### SOURCE

- ☐ 25 W
- ☐ 50 W
- ☐ 75 W\*

\*Available for 3 & 4 Ft.

### RADIANCE

- ☐ DD - Direct (100%Down)
- ☐ UD - Uneven(70%Down/30%Up)\*\*

\*Light Distribution.

\*\*Suspended Configuration only.

### VOLTAGE

- ☐ UNV - 120/277V
- ☐ 347V\*

\*Not available for all configurations.

### DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dim (1%)
- ☐ DLO - 0-10V Dim (to Off)
- ☐ DL2 - 0-10V Dim (TW)
- ☐ DA4 - DALI D4i
- ☐ DMX - DMX RGBW
- ☐  \*

\*Specify dimming protocol.

### MOUNTING

- ☐ C6B - 6 Ft Canopy BK\*
- ☐ C6W - 6 Ft Canopy WH\*
- ☐ C  Ft\*\*
- ☐ S6B - 6 Ft Cord BK\*
- ☐ S6W - 6 Ft Cord WH\*
- ☐ S  Ft\*\*
- ☐ R6B - Stem 6 Ft BK\*
- ☐ R6W - Stem 6 Ft WH\*
- ☐ R  Ft\*\*
- ☐ WM - Wall Mount
- ☐ SF - Surface Mount

\*Canopy will match the Cord/Stem color.

\*\*Specify Suspension length and color.

\*\*\*Stem Mounting not available for all configurations.

### LENS

- ☐ OP - Opal

### FINISH

- ☐ BK - Black\*
- ☐ WH - White\*\*
- ☐ CF/RAL  \*\*\*

\*RAL 9005

\*\*RAL 9016

\*\*\*Specify required RAL number.

### CCT

- ☐ 30K - 3000 Kelvin/90CRI
- ☐ 35K - 3500 Kelvin/90CRI
- ☐ 40K - 4000 Kelvin/90CRI
- ☐ RGBW
- ☐ TW - Tunable White\*  
(2700K-6500K)

- ☐  \*\*

\*Available with 0-10V, Dali or Bluetooth controls.

\*\*Specify required CCT.

### OPTIONS

- ☐ No Options\*
- ☐ DS-Daylight Sensor
- ☐ DC - Dual Circuit\*\*
- ☐ OS - Occupancy Sensor
- ☐ DOS - Daylight & Occupancy Sensor

\*Leave Empty.

\*\*Down /Up Control separately.

## LUMEN OUTPUT:



Watts	30K	35K	40K
25 W	2610 lm	2650 lm	2690 lm
50 W	5150 lm	5250 lm	5380 lm
75 W	7720 lm	7875 lm	8030 lm



Project:


Type:

SIZE:

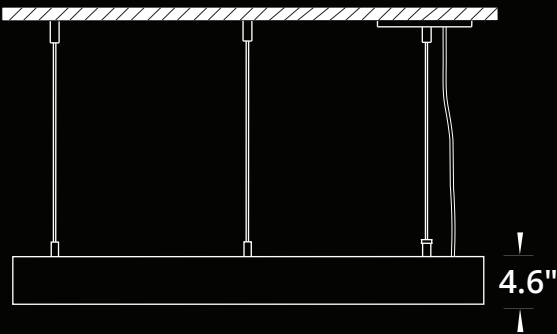


Size	Diameter
2 Ft	23.60 In
3 Ft	35.40 In
4 Ft	47.20 In

RADIANCE:



Direct Distribution



Uneven Distribution

MOUNTING:



SUSPENDED - (S) STRAIGHT



SUSPENDED - (C) CANOPY



SUSPENDED - (R) STEM



SURFACE MOUNT - (SF)