



FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ Available with white aluminum reflector.
- ✓ Suitable for suspended installation.
- ✓ Aluminum body with integrated driver.
- ✓ Available in black or white finish.
- ✓ LED spot is rated for 60,000hrs. L70 with +90 CRI.
- ✓ Has a proven record in office and commercial installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED ZEN+

SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	REFLECTOR	FINISH	CCT

Enter the Product Code into the boxes above.

SOURCE

- ☐ 17W LED
- ☐ 34W LED

RADIANCE

- ☐ DD - Direct

VOLTAGE

- ☐ UNV - 120/277V
 - ☐ 347V¹
1. Verify availability.

DRIVER

- ☐ ST - On/Off
 - ☐ DL - 0-10V Dim (1%)
 - ☐ DLO - 0-10V Dim (to Off)
 - ☐ DLA - 0-10V Dim (Aux)
 - ☐ DA4 - DALI D4i
 - ☐
- Specify dimming protocol.

MOUNTING

- ☐ S6B - 6ft Cord BK¹
- ☐ S6W - 6ft Cord WH¹
- ☐ S ft²

1. Canopy match the Cord color.
2. Specify Suspension length/color.

REFLECTOR


- ☐ AL - Aluminum

FINISH

- ☐ BK - Black¹
 - ☐ WH - White²
1. RAL 9005
2. RAL 9016

CCT

- ☐ 30K - 3000 Kelvin/90CRI
 - ☐ 35K - 3500 Kelvin/90CRI
 - ☐ 40K - 4000 Kelvin/90CRI
 - ☐
- Specify required CCT.

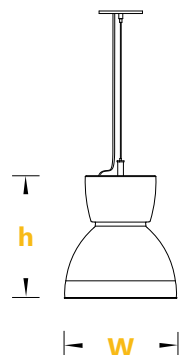

DIMENSIONS:

Height	Width
13.75"	12.25"

LUMEN OUTPUT:

Watts	30K	35K	40K
17W	1950 lm	2000 lm	2050 lm
34W	3900 lm	4000 lm	4100 lm



Project:

Type: