



FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class 1 fire rated with a 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with an opal lens insert provides excellent lighting distribution.
- ✓ Square internal reflector is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with a built-in-driver.
- ✓ LED spot is rated for 60,000 hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

Sonic CUBIC+

TYPE	HEIGHT	SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	REFLECTOR	CUBIC FINISH	CCT	ACOUSTIC

Enter the Product Code into the boxes above.

TYPE

☐ RS - Rectangle

HEIGHT

- ☐ 12 in
☐ 16 in
☐ 24 in

SOURCE

- ☐ 15 W
☐ 20 W
☐ 25 W

RADIANCE

☐ DD - Direct

VOLTAGE

☐ UNV - 120/277V

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DA4 - DALI D4i
☐

Specify dimming protocol.

MOUNTING

- ☐ S6B - 6 ft Cord BK¹
☐ S6W - 6 ft Cord WH¹
☐ S ft

1. Canopy match the Cord color.
 2. Specify Suspension length and color.

REFLECTOR

- ☐ WH - White
☐ BK - Black

ED CUBIC+ FINISH

- ☐ BK - Black¹
☐ WH - White²
 1. RAL 9005
 2. RAL 9003

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐

Specify required CCT.

ACOUSTIC FINISH

Please specify Acoustic Bottom Plate & Body finishes.



LUMEN OUTPUT:


Watts	30K	35K	40K
15 W	1400 lm	1430 lm	1460 lm
20 W	1910 lm	1950 lm	1990 lm
25 W	2350 lm	2400 lm	2450 lm



Project:

Type:

SIZE:

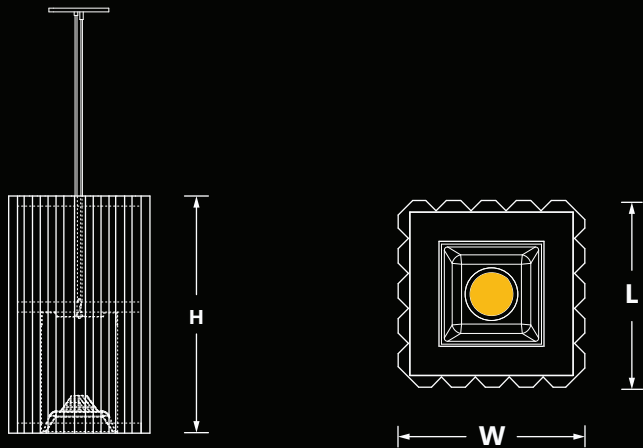

H - Height	W - Width	L -Length
12 in = 11.75 in	8.00 in	8.00 in
16 in = 15.75 in	8.00 in	8.00 in
24 in = 23.75 in	8.00 in	8.00 in

FINISHES:



#09/11



#09/06



#09/15



#09/03



#09/25



#09/09



#09/31



#09/05