

## FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**ED SQUARE+**  —  —  —  —  —  —  —  —  —  —

Enter the order code into the boxes above.

### SIZE

- ☐  Feet\*
- \*1-8 Feet Arm length.

### SOURCE

- ☐ 5W/Ft LED
- ☐ 7W/Ft LED
- ☐ 10W/Ft LED

### RADIANCE

- ☐ DD - Direct (100%Down)
- \*Light distribution.

### VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V\*
- \*Not available for all configurations.

### DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dimming (1%)
- ☐ DLO - 0-10V Dimming (to Off)
- ☐ DL2 - 0-10V Dimming (2 Channels)
- ☐ DA4 - DALI D4i
- ☐ DMX - DMX RGBW
- ☐  \*
- \*Specify dimming protocol.

### MOUNTING

- ☐ S6W - 6Ft Cord WH\*
- ☐ S6B - 6Ft Cord BK\*
- ☐ S  Feet\*\*
- ☐ WF - Wall Flush
- ☐ SF - Surface Mount
- ☐ RT - Recessed Trimless
- \*Canopy will match the Cord color.
- \*\*Specify Suspension length and color.

### LENS

- ☐ OP - Opal
- ☐ PR - Prismatic

### FINISH

- ☐ BK - Black\*
- ☐ WH - White\*\*
- ☐ CF/RAL  \*\*\*
- \*RAL 9005
- \*\*RAL 9016
- \*\*\*Specify required RAL number.

### CCT

- ☐ 30K/90CRI - 3000 Kelvin
- ☐ 35K/90CRI - 3500 Kelvin
- ☐ 40K/90CRI - 4000 Kelvin
- ☐ RGBW
- ☐ TW - Tunable White\* (2700K-6500K)
- ☐  \*\*
- \*Available with 0-10V, Dali or Bluetooth controls.
- \*\*Specify required CCT.

### OPTIONS

- ☐ No Options\*
- ☐ DR - Damp Rated
- ☐ CB - Casambi/Bluetooth
- ☐  \*\*
- \*Leave empty.
- \*\*Specify required option.

## LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm





Declare.

Project:

Type:

SIZE:

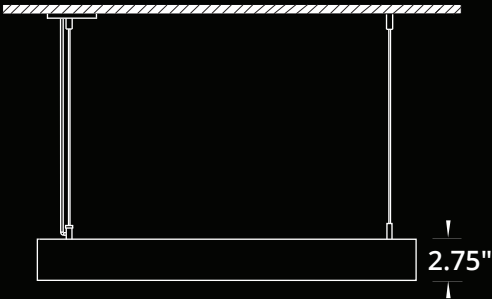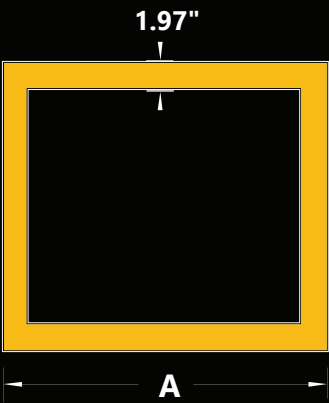

Size	A
1 Feet	13.67
2 Feet	26.42
3 Feet	37.42
4 Feet	50.20
5 Feet	61.20
6 Feet	73.92
7 Feet	84.92
8 Feet	97.67


A - Arm Length

\*All dimensions are in Inches.

RADIANCE:




MOUNTING:

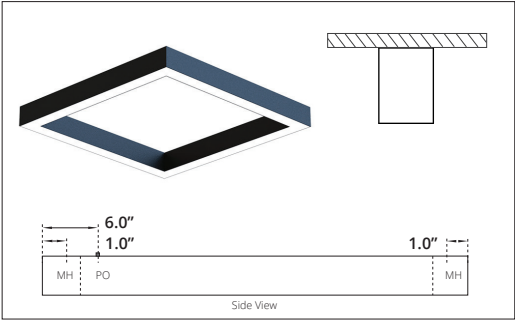

SURFACE MOUNT

MH - Mounting Hole


PO - Power Opening

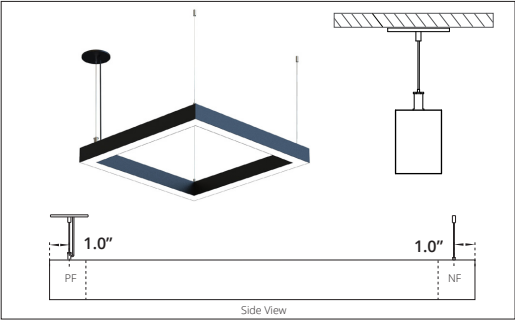

SUSPENDED

PF - Power Feed


NF - Non Power Feed

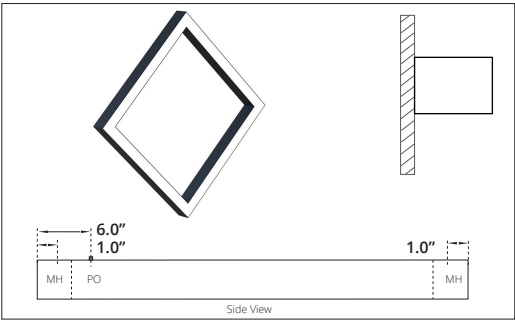

WALL FLUSH

MH - Mounting Hole

PO - Power Opening

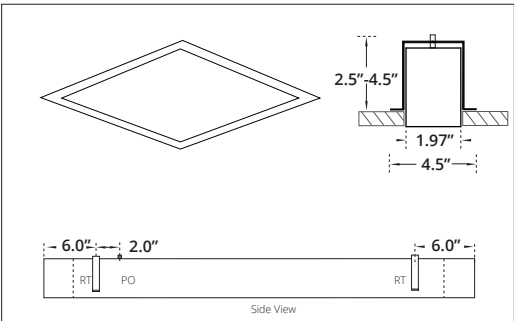

RECESSED TRIMLESS

RT - Recessed Trimless Bracket

PO - Power Opening

\*Cutout Dimensions = Total Length x Width of Extrusion.