

FEATURES:

- ✓ Architectural curved system with direct or direct/indirect distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a high efficiency frosted opal lens or by an optional prismatic optic.
- ✓ Sleek body of the luminaire is made from an aluminum profile curved to desire shape.
- ✓ Suitable for suspended or surface mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Available with custom color options or unique shape configurations.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED CURVES+ - - - - - - - - - - -

Enter the Product Code into the boxes above.

SHAPE

- ☐ CR - Curve
☐ OV - Oval
☐ SQ - Square
☐ RC - Rectangle
☐ CS - Custom Shape *

* Please specify Custom Shape.

SIZE

- ☐ _____ Linear Ft*
 * Provide drawing (pdf or dwg).

SOURCE

- ☐ 5 W/Ft
☐ 7 W/Ft
☐ 10 W/Ft*
 * UD lighting distribution only.

RADIANCE

- ☐ DD - Direct (100% Down)
☐ UD - Uneven(70% Down/30% Up)**
 *Light Distribution.
 **Suspended Configuration only.

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V*
 *Not available for all configurations.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ DA4 - DALI D4i
☐ DMX - DMX RGBW
☐ *

*Specify dimming protocol.

MOUNTING

- ☐ S6B - 6Ft Cord BK*
☐ S6W - 6Ft Cord WH*
☐ S Ft**
☐ SF - Surface Mount
 *Canopy will match the Cord color.
 **Specify Suspension length and color.

LENS

- ☐ OP - Opal
☐ PR - Prismatic
 *1.5mm Polycarbonate.

FINISH

- ☐ BK - Black*
☐ WH - White**
☐ CF/RAL ***
 *RAL 9005
 **RAL 9003
 ***Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW
☐ TW - Tunable White*
 (2700K-6500K)
☐ **

*Available with 0-10V, Dali or Bluetooth controls.
 **Specify required CCT.

OPTIONS

- ☐ No Options*
☐ DC - Dual Circuit**
☐ CB - Casambi/Bluetooth

*Leave Empty.
 **Down /Up Control separately.

LUMEN OUTPUT W/Ft:


Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



Project:

Type:



SIZE:

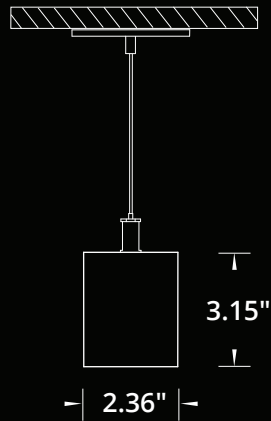


MINIMUM RADIUS:



RADIANCE:



SHAPES:

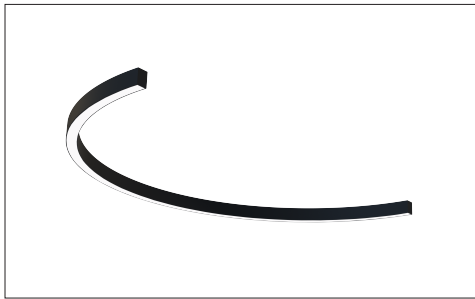


CURVE



OVAL



SQUARE

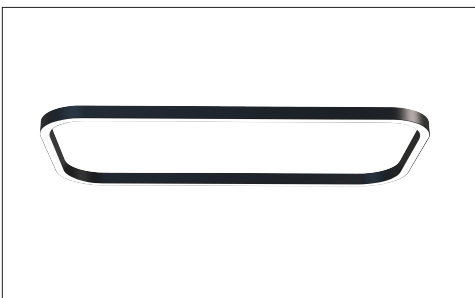

RECTANGLE



CUSTOM SHAPE



CUSTOM SHAPE