


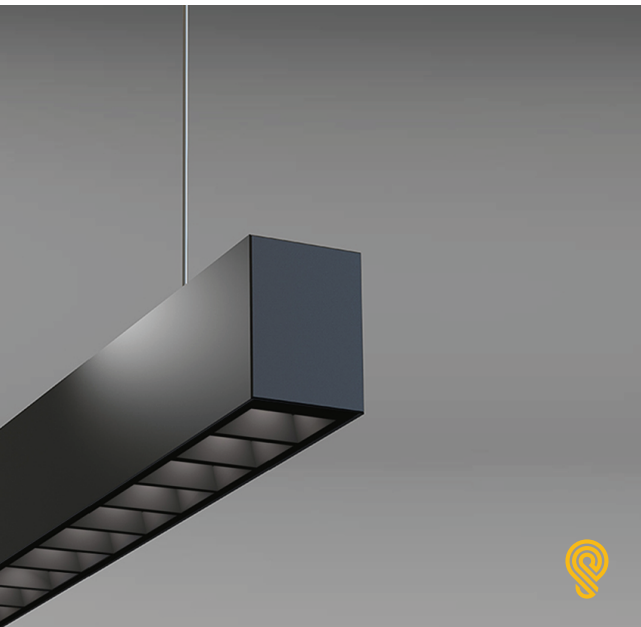

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/Indirect distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low-glare illumination.
- ✓ Offered with a Flood 50°/10UGR, Wide 80°/15UGR or Asymmetric beam angle.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for surface, suspended, recessed and wall mount installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED VECTOR+ - - - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

- ☐ DO
Dark Optic

SIZE

_____ ft
1-8 ft
Continuous Run
(1 ft increments)

SOURCE

- ☐ 3 W/ft
☐ 5 W/ft
☐ 8 W/ft

RADIANCE

- ☐ DD - Direct
☐ UD - Uneven¹
1. Available in sizes 4 ft and up.

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V¹
1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DLA - 0-10V Dim (Aux)
☐ DA4 - DALI D4i
☐
Specify dimming protocol.

MOUNTING

- ☐ S6B - 6ft Cord BK¹
☐ S6W - 6ft Cord WH¹
☐ S ft²
☐ WM - Wall Mount
☐ WF - Wall Flush
☐ SF - Surface Mount
☐ RT - Recessed Trimless
1. Canopy match the Cord color.
2. Specify Suspension length/color.

BEAM

- ☐ BF - Flood 50°
☐ BW - Wide 80°
☐ BA - Asymmetric

REFLECTOR

- ☐ SB - Black
☐ SW - White
☐ SR - Red
☐ SL - Silver
☐ SG - Gold
☐ SM - Gunmetal

FINISH

- ☐ BK - Black¹
☐ WH - White²
☐ CF/RAL
1. RAL 9005
2. RAL 9016
Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐
Specify required CCT.

OPTIONS

- ☐ No Options¹
☐ EM - Emergency Battery Pack²
☐ DC - Dual Circuit³
☐ EC - Emergency Circuit⁴
☐ CB - Casambi Bluetooth⁴
☐ JD - JDRF Autonomy Sensor (DA4)⁴
☐ DOS - Daylight & Occupancy Sensor (DLA)⁴
☐ AWN - Athena Wireless Node (DLA)⁴
1. Leave empty.
2. Battery Pack per 4 ft section.
3. Control Downlight/Uplight separately.
4. Available in sizes 4 ft and up.

LUMEN OUTPUT W/ft:


Watts	30K	35K	40K
3 W	395 lm	405 lm	415 lm
5 W	660 lm	675 lm	690 lm
8 W	1050 lm	1080 lm	1130 lm



Project:


Type:

SIZE:







Size	L (Total Length)
1 ft	11.34 in
2 ft	22.34 in
3 ft	33.34 in
4 ft	48.22 in
5 ft	59.22 in
6 ft	71.97 in
7 ft	82.97 in
8 ft	95.72 in

CONTINUOUS RUN:

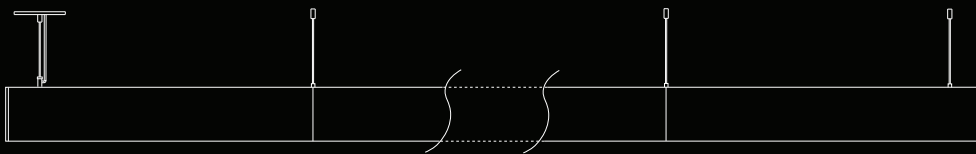


1. L is Total length with endcaps
2. Extrusion length included filler plate.
3. 1-3 ft, no filler plate requires.
4. 4-8 ft, filler plates at the end.
5. Continuous Run, filler plates in between & at the end.

BEAM:




MOUNTING:

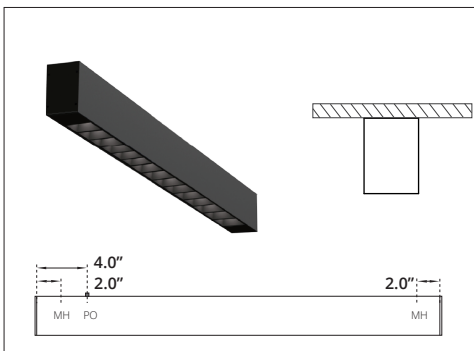


SURFACE MOUNT

MH - Mounting Hole
PO - Power Opening

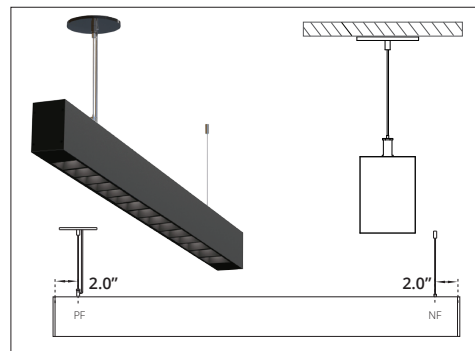


SUSPENDED

PF - Power Feed
NF - Non Power Feed

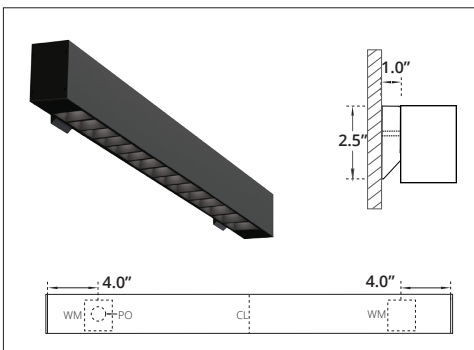

WALL MOUNT

PO - Power Opening
WM - Wall Mount Bracket
1-3 ft, single Wall Mount Bracket with Power Opening in the centre.

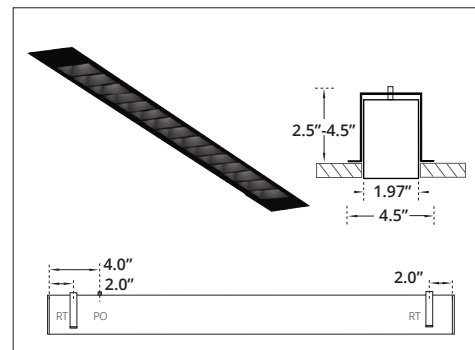

RECESSED TRIMLESS

RT - Recessed Trimless Bracket
PO - Power Opening
Cutout Dimensions = Total Length x Width of Extrusion.

REFLECTORS:

SQUARE



WHITE



SILVER



BLACK



GOLD



RED



GUNMETAL