

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Even illumination is provided by variety of high efficiency optic lenses.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface, suspended, recessed and damp area installations.
- ✓ Extruded aluminum body comes with black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:


Enter the Product Code into the boxes above.

SIZE _____ Feet	SOURCE <input type="checkbox"/> 5W/Ft LED <input type="checkbox"/> 7W/Ft LED <input type="checkbox"/> 10W/Ft LED	RADIANCE <input type="checkbox"/> DD - Direct (100%Down) <input type="checkbox"/> ID - Indirect (100%Up)** <input type="checkbox"/> UD - Uneven(70%Down/30%Up)**	VOLTAGE <input type="checkbox"/> 120V <input type="checkbox"/> 277V <input type="checkbox"/> 347V*	DRIVER <input type="checkbox"/> ST - Standard <input type="checkbox"/> DL - 0-10V Dimming (1%) <input type="checkbox"/> DA - DALI <input type="checkbox"/> WZ - Wiz*** <input type="checkbox"/> <input type="text"/> * <input type="checkbox"/> EC - Emergency Circuit <input type="checkbox"/> EM - Emergency**	MOUNTING <input type="checkbox"/> S4-Suspension 4Feet <input type="checkbox"/> S6-Suspension 6Feet <input type="checkbox"/> S <input type="text"/> Feet* <input type="checkbox"/> WM - Wall Mount <input type="checkbox"/> WF - Wall Flush <input type="checkbox"/> SF - Surface Mount <input type="checkbox"/> RT - Recessed Trimless
---------------------------	--	--	--	--	--

*Light Distribution.
 **Not available for Surface Mount Configuration.
 *Not available for all configurations.
 *Please specify dimming method (ELV).
 **Battery Pack per 4Feet section.
 ***Remote driver only.

LENS <input type="checkbox"/> OP - Opal <input type="checkbox"/> WW - Wall Wash <input type="checkbox"/> PR - Prismatic <input type="checkbox"/> BL - Black Lens <input type="checkbox"/> AR - Aluminum Reflector*	FINISH <input type="checkbox"/> BK - Black <input type="checkbox"/> WH - White <input type="checkbox"/> CF - Custom <input type="text"/> RAL#	CCT <input type="checkbox"/> 30K - 3000Kelvin/90CRI <input type="checkbox"/> 35K - 3500Kelvin/90CRI <input type="checkbox"/> 40K - 4000Kelvin/90CRI <input type="checkbox"/> RGBW <input type="checkbox"/> TW - Tunable White** (2700K-6500K)	OPTIONS <input type="checkbox"/> No Options* <input type="checkbox"/> DR - Damp Rated <input type="checkbox"/> DS - Daylight Sensor <input type="checkbox"/> DC - Dual Circuit** <input type="checkbox"/> OS - Occupancy Sensor <input type="checkbox"/> DOS - Daylight & Occupancy Sensor
--	---	--	---

* Available for 4Feet only (Actual length included).
 *Other options are available.
 **Available with 0-10V,Dali or Bluetooth controls.
 *Leave Empty.
 **Down /Up Control separately.
 ***Combination example (DR/DS).

LUMEN OUTPUT W/Ft:


Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm



Project:

Type:

SIZE:

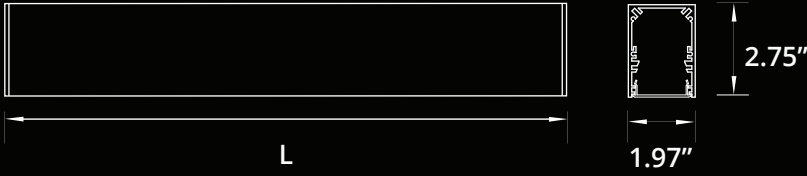

Size	L (LENGTH)
1 Feet	11.780 Inch
2 Feet	24.530 Inch
3 Feet	35.530 Inch
4 Feet	48.280 Inch
5 Feet	59.280 Inch
6 Feet	72.030 Inch
7 Feet	83.030 Inch
8 Feet	95.780 Inch

RADIANCE:


DIRECT DISTRIBUTION




UNEVEN DISTRIBUTION




MOUNTING:

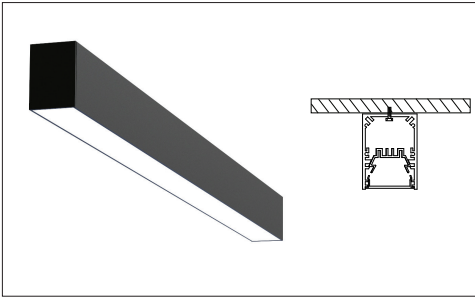


SURFACE MOUNT

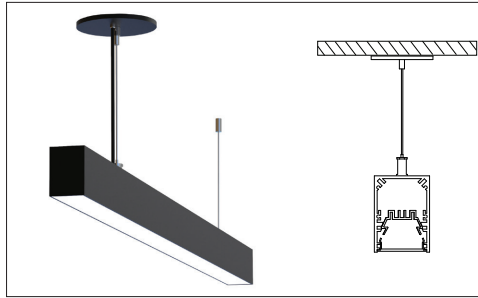


SUSPENDED

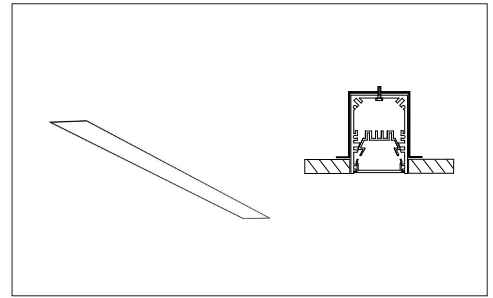


RECESSED TRIMLESS

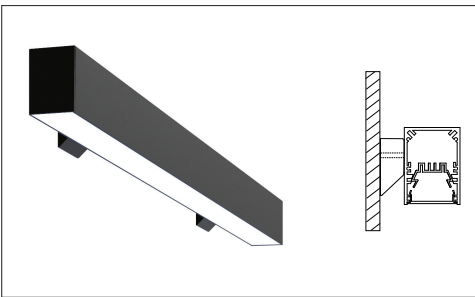

WALL MOUNT

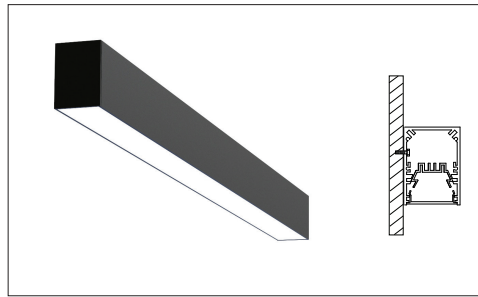

WALL FLUSH

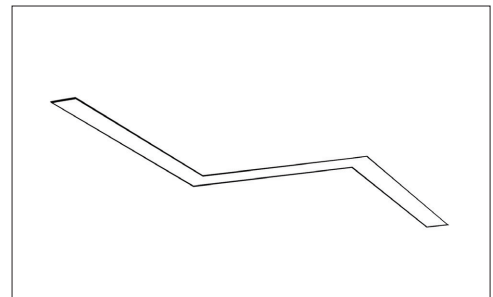

90° LEFT/90° RIGHT