



FEATURES:

- ✓ Architectural sound-absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 fire-rated with 0.7 Noise Reduction Coefficient for 1" acoustic.
- ✓ Light source: COB LED.
- ✓ A high-efficiency integral louver combined with an opal lens insert provides excellent lighting distribution.
- ✓ A circular internal louver is available in a black or white finish.
- ✓ The aluminum body of the luminaire comes with a built-in driver.
- ✓ The LED spot is rated for 60,000 hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial, and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

Sonic TUBE+

- - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

LS - Layered Shade

HEIGHT

12 in
 16 in

SOURCE

15 W
 20 W
 25 W

RADIANCE

DD - Direct

VOLTAGE

UNV - 120/277V

DRIVER

ST - On/Off
 DL - 0-10V Dim (1%)
 DA4 - DALI D4i

Specify dimming protocol.

MOUNTING

S6B - 6 ft Cord BK¹
 S6W - 6 ft Cord WH¹
 S ft²

1. Canopy match the Cord color
2. Specify Suspension length and color.

LOUVER

LB - Black
 LW - White

ED TUBE+ FINISH

BK - Black¹
 WH - White²
1. RAL 9005
2. RAL 9003


CCT

30K - 3000 Kelvin/90CRI
 35K - 3500 Kelvin/90CRI
 40K - 4000 Kelvin/90CRI

Specify required CCT.

ACOUSTIC FINISH

Specify Acoustic Finish, for example (04)

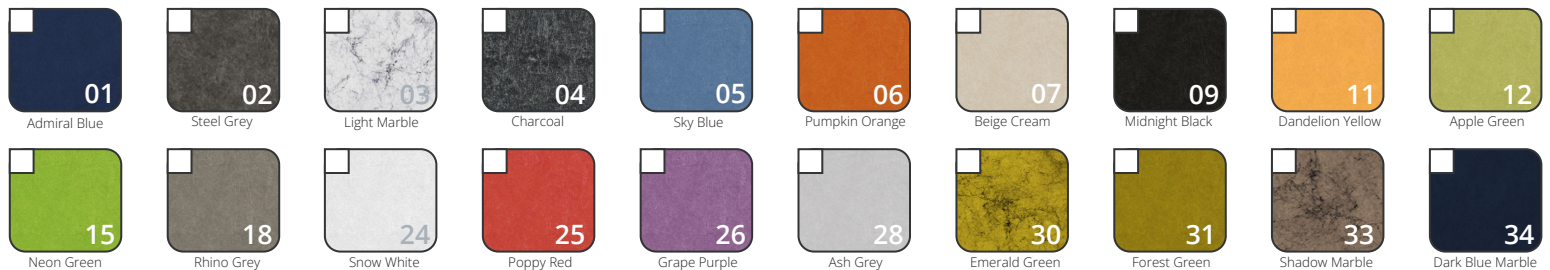

LUMEN OUTPUT:


| Watts | 30K | 35K | 40K |
|-------|---------|---------|---------|
| 15 W | 1400 lm | 1430 lm | 1460 lm |
| 20 W | 1910 lm | 1950 lm | 1990 lm |
| 25 W | 2350 lm | 2400 lm | 2450 lm |



Project:

Type:

SIZE:

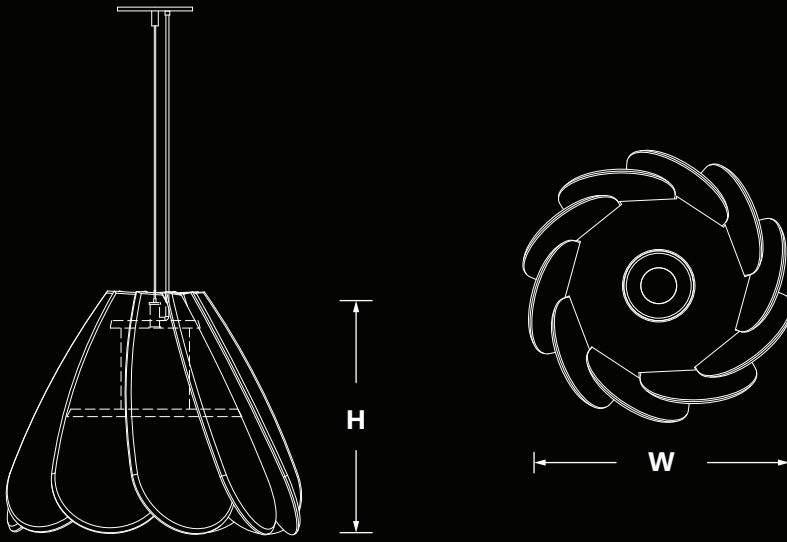

| H - Height | Diameter |
|------------------|----------|
| 12 in = 11.75 in | 16.00 in |
| 16 in = 15.75 in | 20.00 in |

FINISHES:



01



06



28



26



05



11



12



25