

## FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency metalized integral reflector is available with Narrow 15°, Medium 25° or Flood 40° beam angle.
- ✓ Available with optional flat frame plate for NC installation.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ Round adjustable trim can rotate 350° or tilted up to 30°.
- ✓ LED spot is rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**ED AR+**  SOURCE —  RADIANCE —  VOLTAGE —  DRIVER —  MOUNTING —  BEAM —  TRIM —  CCT

Enter the Product Code into the boxes above.

### SOURCE

12W

### RADIANCE

DD - Direct

### VOLTAGE

UNV - 120/277V

347V<sup>1</sup>

1. Verify availability.

### DRIVER

ST - On/Off

DL - 0-10V Dim (1%)

Specify dimming protocol.

### MOUNTING

RT -Retrofit

NC- New Const. Plate

### BEAM

BN - Narrow 15°  
 BM - Medium 25°  
 BF - Flood 40°

### TRIM

BK - Black<sup>1</sup>  
 WH - White<sup>2</sup>  
 1. RAL 9005  
 2. RAL 9003

### CCT

30K - 3000 Kelvin/90CRI  
 35K - 3500 Kelvin/90CRI  
 40K - 4000 Kelvin/90CRI


Specify required CCT.

## DIMENSIONS:

Height	Width	Cut Out
3.625 in	3.36 in	2.937 in


## LUMEN OUTPUT:

Watts	30K	35K	40K
12 W	1050 lm	1080 lm	1110 lm

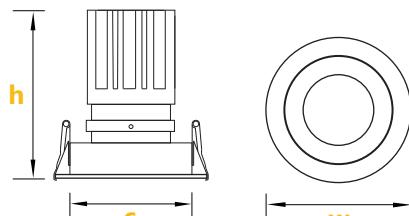

Project:

Type:

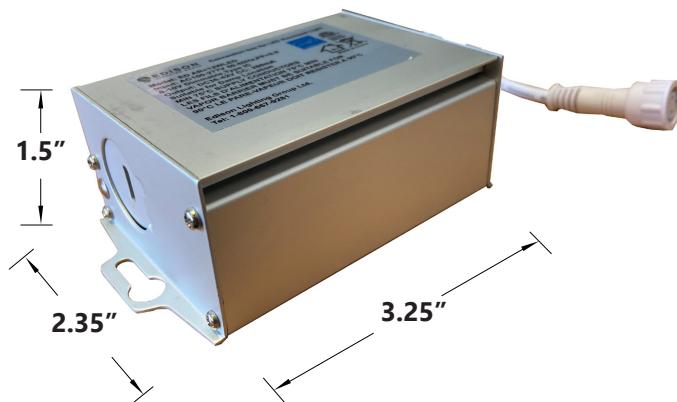**DRIVER BOX:**

**NC PLATE:**
