


FEATURES:

- Architectural linear luminaire with direct distribution.
- Light source: LED board or LED strip.
- Even illumination is provided by a high efficiency opal lens.
- ✓ Available for row-mounted installations in various lengths.
- Suitable for recessed applications in drywall or T-Bar ceilings.
- Extruded aluminum body comes with a standard black or white finish.
- Also available with various custom color options.
- LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

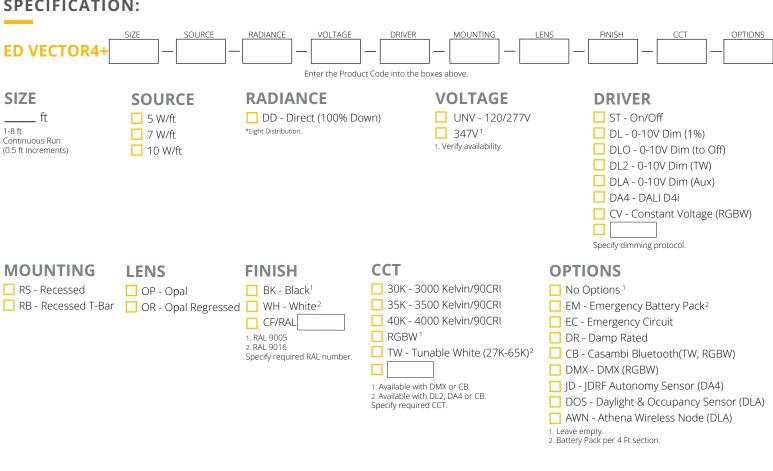

LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm











Project: Type:

905-830-0339 / 1-800-667-9281



info@edisonlighting.ca



www.edisonlighting.ca




SIZE: **-**| 3.50"|-4.00" **-**| 4.00" | **CONTINUOUS RUN:** 14" L-Total length for Drywall ceiling. L1- Total length for T-Bar ceiling.

RADIANCE:



MOUNTING:



Size	L (Drywall Ceiling)	
1 ft	11.34 in	
2 ft	22.34 in	
3 ft	33.34 in	
4 ft	48.22 in	
5 ft	59.22 in	
6 ft	71.97 in	
7 ft	82.97 in	
8 ft	95.72 in	
4 Lis Total langth with and sons for Daywell Cailing		

L is Total length with endcaps for Drywall Ceiling.
Cutout Dimensions = Total Length x Width of Extrusion.



90° IN (WALL TO CEILING)


	2.5"-4.5"
4.0"	2.0";

PO - Power Opening Cutout Dimensions = Total Length x Width of Extrusion.

RECESSED T-BAR RB - Recessed T-BAR Bracket PO - Power Opening

Size	L1 (T-Bar Ceiling)
1 ft	11.75 in
2 ft	23.75 in
3 ft	35.75 in
4 ft	47.75 in
5 ft	59.75 in
6 ft	71.75 in
7 ft	83.75 in
8 ft	95.75 in

L1 is Total length with endcaps for T-Bar Ceiling.



VARIABLE ANGLE

905-830-0339 / 1-800-667-9281



✓ info@edisonlighting.ca



www.edisonlighting.ca