
FEATURES:

- ✓ Architectural curved system with direct or direct/indirect distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a high efficiency frosted opal lens or by an optional prismatic optic.
- ✓ Sleek body of the luminaire is made from an aluminum profile curved to desire shape.
- ✓ Suitable for suspended or surface mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Available with custom color options or unique shape configurations.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED CURVES+ - - - - - - - - - - -

Enter the Product Code into the boxes above.

SHAPE <input type="checkbox"/> CR - Curve <input type="checkbox"/> RG - Ring <input type="checkbox"/> OV - Oval <input type="checkbox"/> SQ - Square <input type="checkbox"/> RC - Rectangle <input type="checkbox"/> CS - Custom Shape <input type="text"/> <small>Specify Custom Shape.</small>	SIZE <input type="checkbox"/> _____ Linear ft <small>Provide drawing (pdf or dwg).</small>	SOURCE <input type="checkbox"/> 5W/ft <input type="checkbox"/> 7W/ft <input type="checkbox"/> 10W/ft	RADIANCE <input type="checkbox"/> DD - Direct <input type="checkbox"/> UD - Uneven ¹ <small>1. Suspended Configuration only.</small>	VOLTAGE <input type="checkbox"/> UNV - 120/277V <input type="checkbox"/> 347V ¹ <small>1. Verify availability.</small>	DRIVER <input type="checkbox"/> ST - On/Off <input type="checkbox"/> DL - 0-10V Dim (1%) <input type="checkbox"/> DLO - 0-10V Dim (to Off) <input type="checkbox"/> DL2 - 0-10V Dim (TW) <input type="checkbox"/> DLA - 0-10V Dim (Aux) <input type="checkbox"/> DA4 - DALI D4i (TW) <input type="checkbox"/> CV - Constant Voltage (RGBW) <input type="checkbox"/> <input type="text"/> <small>Specify dimming protocol.</small>
MOUNTING <input type="checkbox"/> S4-Suspension 4 ft <input type="checkbox"/> S6-Suspension 6 ft <input type="checkbox"/> S <input type="text"/> ft <input type="checkbox"/> SF - Surface Mount <small>Specify required Length.</small>	LENS <input type="checkbox"/> OP - Opal	FINISH <input type="checkbox"/> BK - Black ¹ <input type="checkbox"/> WH - White ² <input type="checkbox"/> CF/RAL <input type="text"/> <small>1. RAL 9005 2. RAL 9003 Specify required RAL number.</small>	CCT <input type="checkbox"/> 30K - 3000 Kelvin/90CRI <input type="checkbox"/> 35K - 3500 Kelvin/90CRI <input type="checkbox"/> 40K - 4000 Kelvin/90CRI <input type="checkbox"/> RGBW ¹ <input type="checkbox"/> TW - Tunable White (27K-65K) ² <input type="checkbox"/> <input type="text"/> <small>1. Available with DMX or CB. 2. Available with DL2, DA4 or CB. Specify required CCT.</small>	OPTIONS <input type="checkbox"/> No Options ¹ <input type="checkbox"/> DC - Dual Circuit ² <input type="checkbox"/> EC - Emergency Circuit <input type="checkbox"/> CB - Casambi Bluetooth(TW, RGBW) <input type="checkbox"/> DMX - DMX (RGBW) <input type="checkbox"/> AWN - Athena Wireless Node (DLA) <small>1. Leave empty. 2. Control Downlight/Uplight separately.</small>	

LUMEN OUTPUT W/ft:


Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm




Project:

Type:



SIZE:

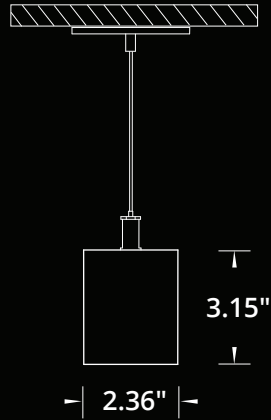



MINIMUM RADIUS:



RADIANCE:

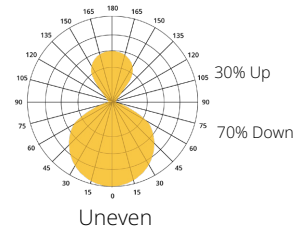



SHAPES:

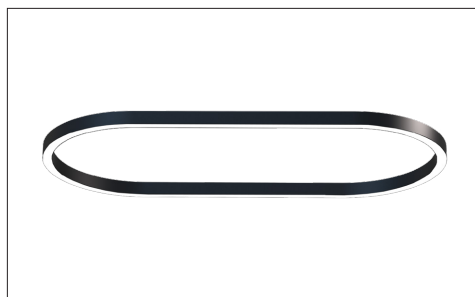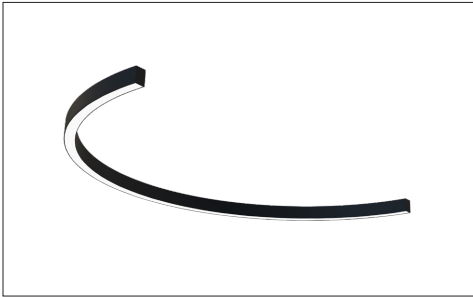

CURVE

OVAL

SQUARE

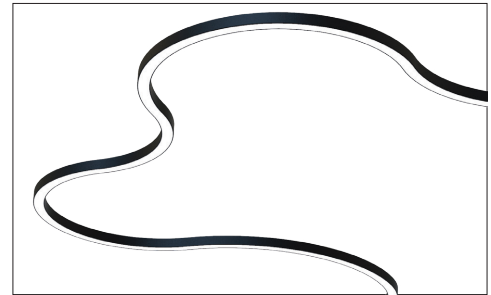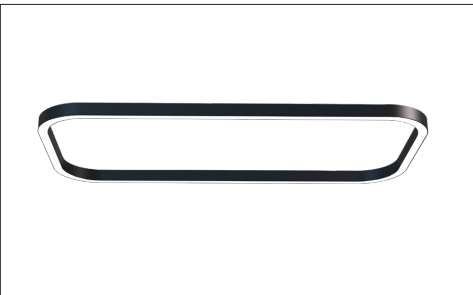

RECTANGLE

CUSTOM SHAPE

CUSTOM SHAPE